

## SECTION 2. INSTALLATION

### 2-1. INTRODUCTION

#### NOTICE

Installation of this unit should be performed only by a qualified service technician.



**Do not puncture the skin of the unit with drills or screws, or component damage or electrical shock could result.**

### 2-2. UNPACKING

The Henny Penny humidified holding cabinet has been tested, inspected, and expertly packed to ensure arrival at its destination in the best possible condition.

#### NOTICE

Note any shipping damage in the presence of the delivery agent and signed prior to his or her departure.

To remove the Henny Penny cabinet from carton:

1. Carefully cut banding straps.
2. Lift carton off the unit.
3. Lift the unit off the cardboard padding and skid.



**Full-size cabinets weigh approximately 300 lbs. (136 kg). Care should be taken when lifting unit to prevent personal injury.**

## **2-2. UNPACKING (Continued)**

4. Open doors and remove packing from behind racks and the water pan in the bottom of the unit.
5. Peel off any protective covering from the exterior of the cabinet.
6. The cabinet is now ready for location and use.

## **2-3. LOCATION**

Place the humidified holding cabinet in an area that allows the doors to be opened without interference of loading and unloading product. Also, keep the unit level for proper operation.

### **NOTICE**

No minimum clearances are required for the rear and sides of the cabinet.

## 2-4. ELECTRICAL CONNECTION



To avoid electrical shock, the cabinet must be adequately and safely grounded (earthed) according to local electrical codes, and this appliance must be equipped with an external circuit breaker which will disconnect all ungrounded (unearthed) conductors. The main power switch on this appliance does not disconnect all line conductors.

### (FOR EQUIPMENT WITH CE MARK ONLY!)


To prevent electric shock hazard this appliance must be bonded to other appliances or touchable metal surfaces in close proximity to this appliance with an equipotential bonding conductor. This appliance is equipped with an equipotential lug for this purpose. The equipotential lug is marked with the following symbol



If the electrical supply to the unit is a cord and plug, then the electrical receptacle, for the plug, must be easily accessible. Refer to the table below for the electrical ratings for the HHC-990 series cabinets.

<u>Model</u>	<u>Volts, 60Hz</u>	<u>Phase</u>	<u>Amps</u>	<u>Watts</u>
<b>HHC-990</b>	120	1	24.0	2880
	120	1	22.3	2680
	208	1	13.8	2880
	240	1	12.0	2876
	240	1	11.2	2676
	220-240-CE	1	11.6	2792
<b>HHC-993/</b>	120	1	17.3	2080
<b>HHC-992</b>	208	1	10.0	2080
	240	1	8.7	2076
	220-240-CE	1	8.3	1992
<b>HHC-996</b>	120	1	27.3	3280
	208	1	15.8	3280
	240	1	13.7	3276
	240	1	16.2	3876
	220-240-CE	1	13.3	3192
<b>HHC-997/</b>	120	1	17.3	2080
<b>HHC-998</b>	120	1	24.0	2880
	120	1	22.3	2680
	208	1	13.8	2880
	240	1	8.7	2076
	240	1	12.0	2876
	220-240-CE	1	8.3	1992
	220-240-CE	1	11.6	2792

## **2-5. CABINET DIMENSIONS AND WEIGHTS**

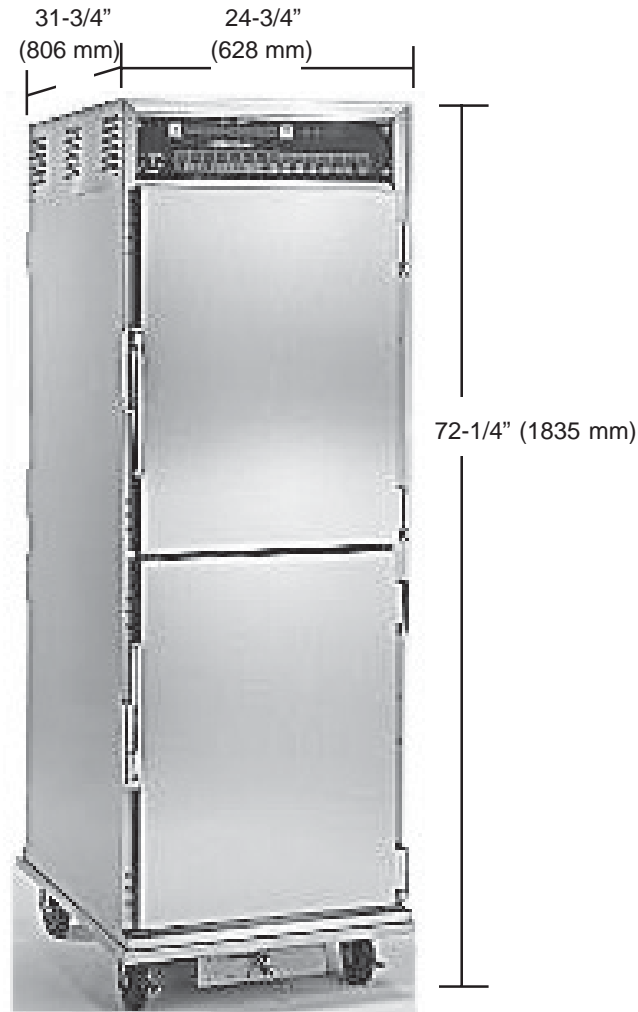


**HHC-990**

<b>Unit</b>	<b>Height</b>	<b>Width</b>	<b>Depth</b>	<b>Shipping Weight</b>
HHC-993	38" (965 mm)	24-3/4" (628 mm)	31-3/4" (806 mm)	220 lbs (100 kg)
HHC-990	72-1/4" (1835 mm)	24-3/4" (628 mm)	31-3/4" (806 mm)	367 lbs (167 kg)
HHC-992	76" (1930 mm)	24-3/4" (628 mm)	31-3/4" (806 mm)	493 lbs (224 kg)
HHC-998	38" (965 mm)	27-3/4" (705 mm)	31-3/4" (806 mm)	269 lbs (122 kg)
HHC-996	72-1/4" (1835 mm)	27-3/4" (705 mm)	31-3/4" (806 mm)	400 lbs (181 kg)
HHC-997	76" (1930 mm)	27-3/4" (705 mm)	31-3/4" (806 mm)	523 lbs (237 kg)

**2-6. PROBE CLIP (OPTIONAL)**

The probe clip is an accessory, that may be ordered as an option, to hold the food probe when not in use.

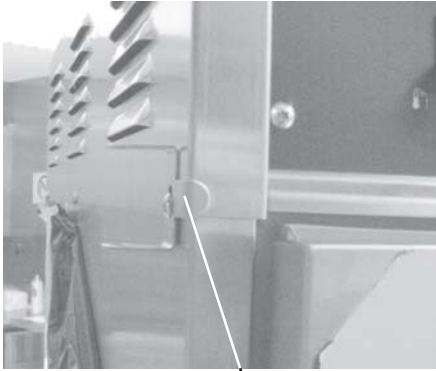

**Probe Clip**

Remove one of the module screws and mount the probe clip with that screw. See photo at left.

**NOTICE**

The food probe is accessed easier if the clip is mounted on the side of the unit that the door opens. See photo below.

**Mount clip  
here.**

