

ASMP-36 Roll-In Rack Proofer

Project _____

Item _____

Quantity _____



SIZE:

ASMP-36 - 89-1/8" High, 61-7/8" Wide, 37-1/8" Deep
2264 mm High, 1572 mm Wide, 943 mm Deep

NU-VU's ASMP-36 roll-in rack proofer features heavy-duty stainless steel construction, with solid doors. These units also feature the AutoMist humidity system. While these units do not come standard with a roll-in rack, they are available as an accessory item.

CONSTRUCTION:

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and top of unit
- Heating elements accessible inside of cabinet and through top

CONTROLS:

- Solid state controls
- Indicator light for thermostat
- Separate heat and humidity controls
- 60 minute timer

NU-VU® ASMP-36 Roll-In Rack Proofer

STANDARD FEATURES:

- Stainless steel construction
- Solid doors
- Solid state controls
- AutoMist humidity system
- Magnetic Handles

OPTIONAL FEATURES:


- Stainless steel roll-in rack (20-1115)



NU-VU® Food Service Systems


www.nu-vu.com
5600 13th Street
Menominee, MI 49858

1-800-338-9886 Toll Free
1-906-863-4401 Phone
1-906-863-5889 Fax

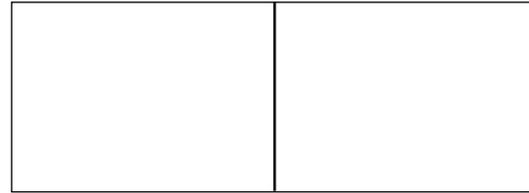

Approval / Stamp

ASMP-36 Roll-In Rack Proofer

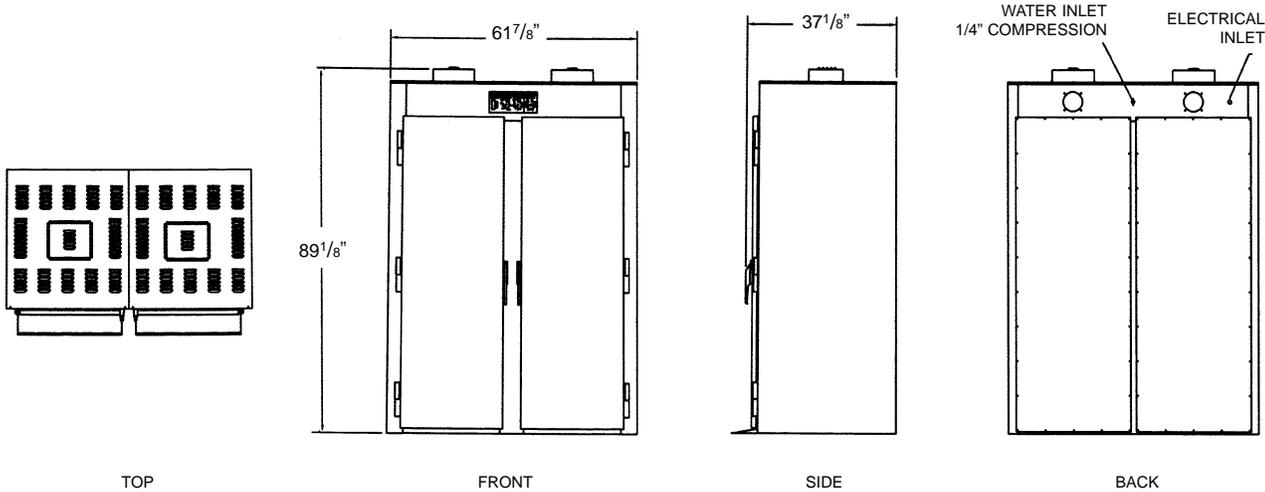

NU-VU® ASMP-36 Roll-In Rack Proofer

SPECIFICATIONS:

ELECTRICAL:

SERVICE CONNECTIONS:

- Unit is shipped from factory to be hard wired on site. Single phase uses three-wire system. Three phase uses four-wire system
- 208 or 240 Volt single phase is standard. Please specify at time of order.
- A 1/4" waterline is required. A water softening system should be used to minimize mineral build-up.

ELECTRICAL:

Amp Draw	208/1	208/3	240/1	240/3
	22	20	19	17

INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Proofer	36	72	n/a

DIMENSIONS:

	Height	Width	Depth
Exterior	89-1/8"	61-7/8"	37-1/8"
Interior Per Side	75-5/8"	24"	32-3/4"

DOOR SWING: Proofer - 31-1/2" (800 mm)

PACKING SIZE:

83" High, 60" Wide, 38" Deep
 (2108 mm High, 1524 mm Wide, 965 mm Deep)

SHIPPING WEIGHT:

1000 Pounds (454 Kg), FOB Menominee, MI 49858