

SECTION 2. INSTALLATION

2-1. INTRODUCTION

This section provides the installation instructions for the Henny Penny Heated Holding Cabinet.

NOTICE

Installation of this unit should be performed only by a qualified service technician.



Do not puncture the skin of the unit with drills or screws as component damage or electrical shock could result.

2-2. UNPACKING

The Henny Penny Heated Holding Cabinet has been tested, inspected, and expertly packed to ensure arrival at its destination in the best possible condition. The cabinet rests on cardboard pads that sit on a wooden skid. The racks inside the cabinet are secured with cardboard packing. The unit is then packed inside a heavy cardboard carton with sufficient padding to withstand normal shipping treatment.

NOTICE

Any shipping damages should be noted in the presence of the delivery agent and signed prior to his or her departure.

To remove the Henny Penny Heated Holding Cabinet from the carton, you should:

1. Carefully cut banding straps.
2. Lift the carton off the unit.
3. Lift the unit off the cardboard padding and skid.



Take care when moving the fryer to prevent personal injury. The unit weighs 110 lbs. (49.9kg).

4. Open doors and remove packing from behind racks.
5. Peel off any protective covering from the exterior of the cabinet.
6. The unit is now ready for location and set up.

2-3. LOCATION



Figure 1

The unit should be placed in an area where the doors can be opened without interruption and loading and unloading of product is easy. For proper operation, the cabinet must be level.

The unit **MUST** be mounted to the table-top, using the 4, 1/4-20 x 1-1/2 inch (38.1 mm) bolts and washers, supplied with the cabinet.

Screw the bolts up through the table and into the holes in the base of the unit as shown in Figure 1.

2-4. ELECTRICAL CONNECTION

The data plate, located on the side of the top module, will specify the correct electrical supply. The heated holding cabinet is available from the factory as a 120 or 240 VAC unit. The unit requires a grounded receptacle with a separate electrical line protected by a fuse or circuit breaker of the proper rating. For European markets, verify the electrical plug meets the proper electrical rating and country type. See local authorities for proper standards.




To avoid electrical shock, the cabinet must be adequately and safely grounded (earthed) according to local electrical codes.

Refer to the table below for electrical ratings.

Product Number	Volts	Watts	Amps
HHC-136	120	1320	
	240	1320	5.5
HCN-5	240	1320	5.5

2-5. CABINET DIMENSIONS

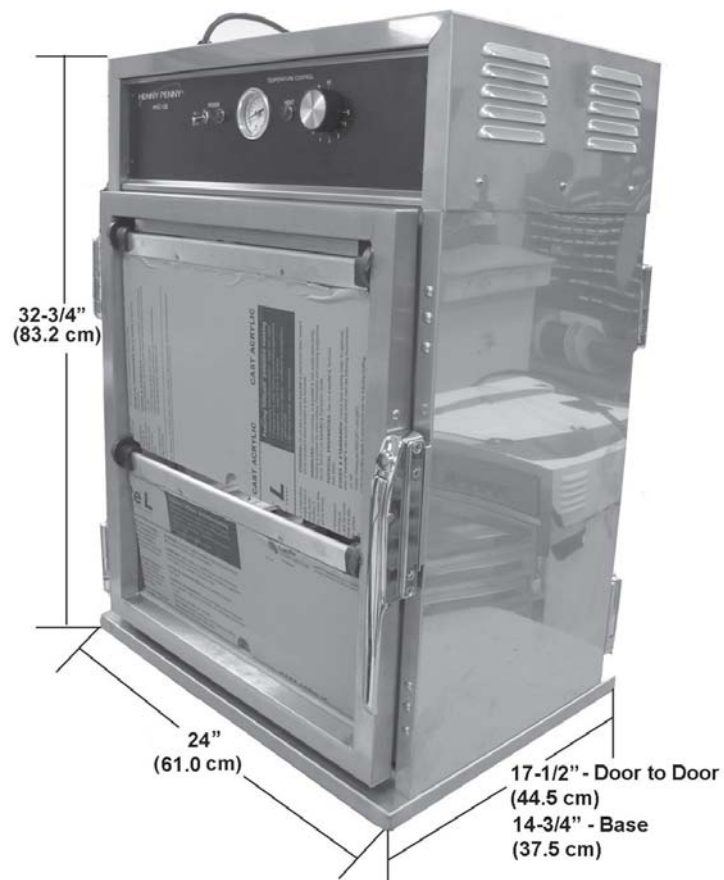

**Model HHC-136
&
Model HCN-5**