

SECTION 2. INSTALLATION

2-1. INTRODUCTION

This section provides the installation instructions for the Henny Penny Multipurpose Holding Cabinet.

NOTICE

Installation of this unit should be performed by a qualified service technician.



Do not puncture the skin of unit with drills or screws as component damage or electrical shock could result.

2-2. UNPACKING

The Henny Penny Multipurpose Holding Cabinet has been tested, inspected, and expertly packed to ensure arrival at its destination in the best possible condition. The cabinet rests on cardboard pads that sit on a wooden skid. The unit is then packed inside a heavy cardboard carton with sufficient padding to withstand normal shipping treatment.

NOTICE

Any shipping damages should be noted in the presence of the delivery agent and signed prior to his or her departure.

To remove the unit from the carton, you should:

1. Carefully cut banding straps.
2. Lift carton off the unit.
3. Lift the unit from the cardboard pads and skid.



Take care when lifting unit to prevent personal injury. The units can weigh as much as 278 lbs. (126 kg).

2-2. UNPACKING (Continued)

4. Open drawers and remove the packing or literature that is inside.
5. Pull off any protective covering from the exterior of the cabinet.
6. Your multipurpose holding cabinet is now ready for location and setup.

2-3. ELECTRICAL

The multipurpose holding cabinets are available from the factory as 120 VAC for domestic use, or 230 VAC for international use. The units are single phase and require a grounded (earthed) receptacle with a separate electrical line protected by a fuse or circuit breaker of the proper rating.

NOTICE

The electrical plugs for the 230 volt units must be supplied by the distributor and have the proper grounding (earthing).

DATA TABLE:

Model Number	Volts	Phase	Watts	Amps
MP-941	120	1	475	3
MP-942	120	1	950	6
MP-943	120	1	1425	9
MP-944	120	1	1900	12
MP-941	230	1	475	2
MP-942	230	1	950	4
MP-943	230	1	1425	6
MP-944	230	1	1900	8



To avoid electrical shock, the cabinet must be adequately and safely grounded (earthed) according to local electrical codes.


(FOR EQUIPMENT WITH CE MARK ONLY!)

To prevent electric shock hazard this appliance must be bonded to other appliances or touchable metal surfaces in close proximity to this appliance with an equipotential bonding conductor. This appliance is equipped with an equipotential lug for this purpose. The equipotential lug is marked with the following symbol



After the multipurpose holding cabinet has been set into position and leveled, run a bead of silicone rubber (silicone or equivalent sealant must be a NSF listed material) around the perimeter of the unit sealing it to the surface. You are now ready to make the electrical connections to the unit.

2-4. CABINET DIMENSIONS

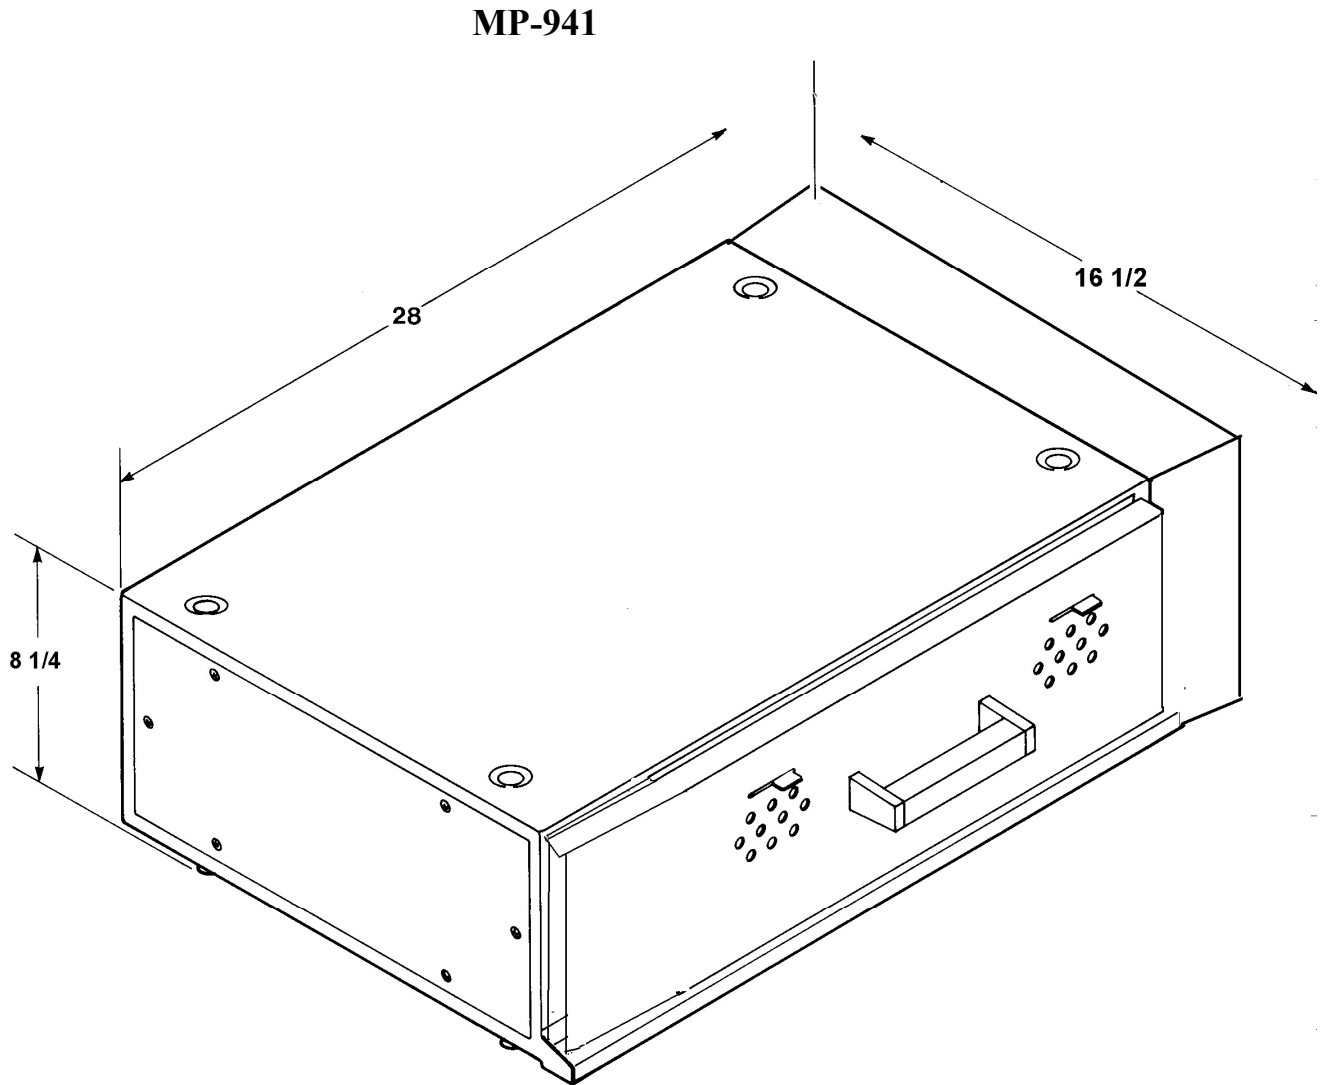

2-4. CABINET DIMENSIONS
(Continued)

