

Project #:	
Item #:	



Model RCS10TS shown

Medium Volume This category of microwave is ideal for...

Applications:

- Pizza restaurants
- Casual dining
- Clubs
- Deli

Defrost:

- Defrosts most frozen food products

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

Medium Volume

Amana Commercial Microwave Model RCS10TS

Power Output

- 1000 watts of power.
- Five power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.

Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option for easy one-touch cooking.
- Multiple quantity pad calculates the proper cooking times for multiple portions.
- User friendly touch controls are easy to use.
- Time entry option for added flexibility.
- Digital display with countdown timer for simple operation and "at-a-glance" monitoring.
- Braille touch pads are ADA compliant.
- See-through door and lighted interior for monitoring without opening the door.
- 1.2 cubic ft. (.034m³) capacity accommodates a 14" (356 mm) platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.


Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Non-removable air filter protects oven components.
- Constructed to withstand the foodservice environment.
- Limited 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- UL and ETL Listed.





Amana Commercial Microwave Model RCS10TS | Medium Volume

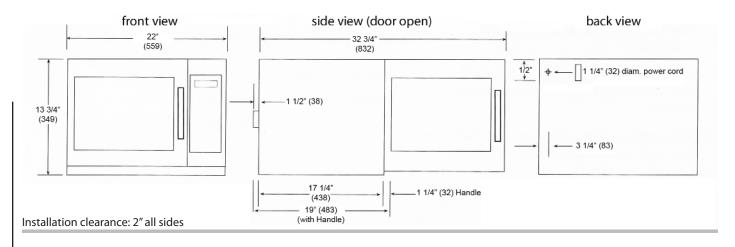

Specifications	
Model	RCS10TS UPC Code 728028020724
Configuration	Countertop
Control System	Touch
Programmable Control	10
Settings Programmable	100
Max. Cooking Time	60:00
Power Levels	5
Defrost	Yes
Time Entry Option	Yes
Microwave Distribution	Rotating antenna, top
Magnetron(s)	1
Display	LED
Stackable	Yes
Stage Cooking	Yes, 4
Interior Light	Yes
Door Handle	Grab & Go
Signal	End of cycle, adjustable
Air Filter	Non-removable with cleaning reminder
Multiple Portion Setting	Yes, X2
Multiple Portion Setting Exterior Dimensions	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6)
Multiple Portion Setting Exterior Dimensions Cavity Dimensions	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381)
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864mm), 90°+ door open
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³)
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption Power Output**	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A 1000 W** Microwave
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption Power Output** Power Source	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption Power Output**	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A 1000 W** Microwave
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption Power Output** Power Source Plug Configuration / Cord Frequency	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption Power Output** Power Source Plug Configuration / Cord Frequency Product Weight	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase NEMA 5-15 5 ft. (1.5m)
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption Power Output** Power Source Plug Configuration / Cord Frequency Product Weight Ship weight (approx.)	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase NEMA 5-15 5 ft. (1.5m) 2450 MHz 41 lbs. (18.6 kg.) 48 lbs. (21.8 kg.)
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption Power Output** Power Source Plug Configuration / Cord Frequency Product Weight Ship weight (approx.) UPS Shippable	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase NEMA 5-15 5 ft. (1.5m) 2450 MHz 41 lbs. (18.6 kg.) 48 lbs. (21.8 kg.) Yes
Multiple Portion Setting Exterior Dimensions Cavity Dimensions Door Depth Usable Cavity Space Exterior Finish Interior Finish Power Consumption Power Output** Power Source Plug Configuration / Cord Frequency Product Weight Ship weight (approx.)	Yes, X2 H 13¾" (349.25) W 22" (558.8) D*19" (482.6) H 8½" (216) W 14½" (368.3) D 15" (381) 34" (864 mm), 90°+ door open 1.2 cubic ft. (.034 m³) Stainless steel Stainless steel 1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase NEMA 5-15 5 ft. (1.5m) 2450 MHz 41 lbs. (18.6 kg.) 48 lbs. (21.8 kg.)

Measurements in () are millimeters

- * Includes handle
- ** IEC 705 Tested

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items with two multiple portions. Touch pad shall include Braille for ADA compliance. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 5 power levels, including defrost and 4 cooking stages. Microwave output shall be 1000 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.2 cubic ft. (.034 m³) cavity shall accommodate a 14" (356 mm) platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Front air filter shall be permanently affixed to the front off the oven and have a clean filter reminder. Microwave oven shall comply with standards set by - the U.S Department of Health and Human Services, UL for safety and ETL for sanitation.



Warranty

Limited 3 year warranty:

Year 1 - parts, labor, and travel are covered.

Years 2 - 3 - magnetron tube (part only) is covered.

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.





Product of the U.S.A.

Printed in the U.S.A.