

Project #:	 				
-					
ltem #:					



Model RC22S2 shown

Heavy Volume This category of microwave is ideal for...

Applications:

- Quick service restaurants
- Stadiums
- Fine dining

Through put potential:

- Pre-cooked frozen bacon, 800+ slices per hour
- Frozen corn on the cob, 55+ per hour
- 1 lb. batch of fettuccini, 3 per hour

Defrost:

- Defrosts most frozen food products



All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any equestion regarding food preparation, menu development and cooking times. 866-426-2621.

Heavy Volume

Amana Commercial Microwave Model RC22S2

Power Output

- 2200 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.
- Unique method of energy distribution provides superior even heating throughout the cavity.

Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming.
 Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for up to 8 items.
- Automatic voltage sensor for easy installation.
- See-through door and lighted interior for monitoring without opening the door.
- Ample 1.0 cubic ft. (28 liter) capacity accommodates two standard 4" (102mm) deep half-sized pans.
- Interior ceramic shelf is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained.
- Stackable to save valuable counter space.


Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable, cleanable air filter and clean filter reminder protect oven components.
- Full 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- ETL Listed.





Commercial Microwave Model RC22S2 | Heavy Volume

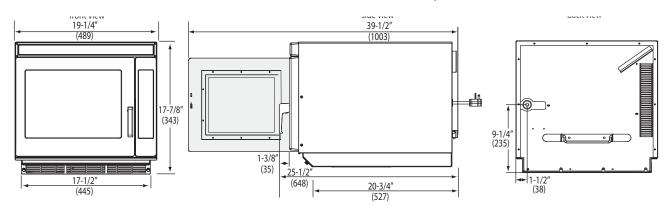

Installation Clearance: 1 1/2" (38.09) top and sides

Drawings available from KCL CADlog - techs@kclcad.com

installation clearance. 1 1/2 (50	.03) top and sides			
Specifications				
Model	RC22S2	UPC Code 042	159033577	
Configuration	Countertop			
Control System	Touch			
Programmable Control Pads	10			
Settings Programmable	100			
Max. Cooking Time	60:00			
Power Levels	11			
Defrost	Yes, power level 2			
Time Entry Option	Yes, 3			
Microwave Distribution	Double rotating antenna, top and bottom			
Magnetrons	2			
Display	LED			
Stackable	Yes			
Stage Cooking	Yes, 4			
Interior Light	Yes			
Door Opening	Lift and pull			
Signal	gnal Adjustable, end of cycle			
Air Filter	Yes, removable, with clean filter reminder			
Call Service Alert	Yes			
Automatic Voltage Sensor	Yes			
Multiple Portion Setting	Yes, up to 8 items			
Exterior Dimensions	H 18¼" (464)	W 19¼" (489)	D** 261/4" (667)	
Cavity Dimensions	H 8½" (216)	W 13" (330)	D 15" (381)	
Door Depth	40" (1016 mm), 90°+ door open			
Usable Cavity Space	1.0 cubic ft. (28 liter)			
Exterior Finish	Stainless steel			
Interior Finish	Stainless steel with sealed-in ceramic shelf			
Power Consumption	3200 W, 15.4 A			
Power Output*	2200 W* Microwave			
Power Source	208 - 240V, 60 Hz, 20 A single phase			
Plug Configuration / Cord	NEMA 6-20	5 ft. (1.5m)	J	
Frequency	2450 MHz		_	
Product Weight	9			
Ship weight (approx.)	101 lbs. (46 Kg.)			
Shipping Carton Size	L 28¼" (718)	W 21¾" (553)	H 21½" (546)	

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to eight portions. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power. Microwave output shall be 2200 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. An automatic voltage sensor shall accommodate both 208 and 240 volts. Heavy duty door shall have a tempered glass window and a grab and pull handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.0 cubic ft. (28 liter) cavity shall accommodate two standard 4" (102 mm) deep half-sized pans. Interior ceramic shelf shall be sealed and recessed into the bottom of the cavity to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have a removable, cleanable splatter shield. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. A "call service alert" shall appear on display when service is needed. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, ETL for safety and sanitation.



Warranty


Full 3 year warranty:

All 3 years – parts, labor, and travel are covered.

Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.





- * IEC 60705 Tested
- ** Includes handle

