

Item #:

Commercial Heavy Volume | Combination Cooking Amana Commercial Oven Model ACE14

fimana[®]

Power Output

- Convection:
 - 2700 W
 - 150° 475° F (65° -250° C) temperature range
 - Convected air for enhanced toasting and browning
- Microwave:
 - 1400 W
 - Heats quickly, reduces cooking time

Cuts Costs

- Uses less energy than a conventional oven.
- Eliminates need for pre-cooking and holding.
- Uses quarter size metal trays, pans and screens.

Simplifies Cooking

- Touch pad operation for consistent results.
- Controls are intuitive and simple to use.
- Stores up to 100 menu items.
- Four stage cooking option.
- EZCard Menu Management System updates programming in seconds.
- 1.2 cubic ft. (.034 m³) oven capacity.
- Door opens 90°+ for full access to the oven cavity.

Easy to Use and Maintain

- Stainless steel exterior and interior.
- Removable, cleanable air filter and clean filter reminder protect oven components.
- Limited 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center 866-426-2621.
- ETL Listed.



Fax: 319-368-8198



Model ACE14 shown

4 times faster than conventional ovens.

Heavy Volume | Combination Cooking

This category of combination oven is ideal for... Application:

- Wine bars

- Country club,

- Convenience stores

- Pubs
- Bakery/cafés
- Kiosks
- Supermarkets

- Supermarkets

Through put potential:

- 6" Inch toasted sub sandwiches, 50 per hour
- 1 portion of 4 frozen crispy chicken wings, 25 portions (84 wings) per hour
- 1 frozen pre-baked fruit filled pastry, 20 per hour
- 12" frozen pizza, 10 per hour
- 1 frozen, pre-baked fruit filled pastry, 20 per hour

Location of oven(s):


- Kitchen shelf
- Kitchen countertop, single or stacked
- Equipment stand, single or stacked

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.





Amana Commercial Microwave Model ACE14 Heavy Volume Combination Cooking

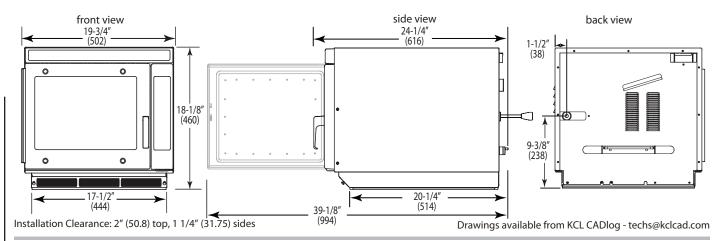

Specifications			
Model	ACE14	UPC Code 883	049125343
Cooking Power*	2700W Convection	1400W Microwave	
Configuration	Countertop		
Control System	Touch		
Programmable Control Pads	10		
Total Programmable Settings	100		
Power Levels	11		
Max. Cooking Time	20:00		
Stackable	Yes		
Time Entry Option	Yes		
Microwave Distribution	Rotating antenna, top		
Magnetrons	1		
Display	LED		
Stage Cooking	Yes, 4		
Door Opening	Lift and pull handle		
Automatic Voltage Sensor	Yes		
EZ Card Menu Management	Yes		
Temperature Range	150° - 475° F (70° - 250° C)		
Air Filter	Yes, removable, with clean filter reminder		
Fan Speed	0-100%		
Rack	3 rack positions, removable		
Exterior Dimensions	H 18 ¼″ (460)	W 19 ¾" (502)	D** 24 ¼"(616)
Cavity Dimensions	H 10 ½″ (267)	W 13″ (330)	D 15″ (381)
Door Depth	40″ (1016), 90°+ door open		
Usable Cavity Space	1.2 cubic ft. (34 liter)		
Exterior Finish	Stainless steel		
Interior Finish	Stainless steel		
Power Consumption	3200 W, 15.4 A		
Power Output*	1400 W* Microwave		
Power Source	208 - 240 V, 60 Hz, 20 A single phase		
Plug Configuration / Cord	NEMA 6-20	5 ft. (1.5 m)	
Frequency	2450 MHz		
Product Weight	95 lbs. (43 kg.)		
Ship weight (approx.)	102 lbs. (46 kg.)		
Shipping Carton Size	H 28 ¼″ (718)	W 21 ¾" (553)	D 21 ½″ (546)

Specifications

Oven shall combine two cooking modes: convection and microwave for high speed cooking. Control panel shall be programmable with the ability to program up to 100 menu items, single or double digit entry. Programs shall be automatically updated with the use of a memory card system. There shall be 11 power levels and 4 cooking stages. Microwave output shall be 1400 watts and distributed from the top of the cavity. An automatic voltage sensor shall accommodate both 208 and 240 volts. The 2700 watt convection oven shall provide a temperature range from 150° - 475° F (70° - 250° C) in 25° increments . The convection fan located in the back of the cavity shall distribute the heat throughout the cavity to further enhance browning. Maximum microwave cooking time shall be 20 minutes. Oven shall have a stainless steel exterior. 1.2 cubic ft. (.034 m³) oven cavity shall be stainless steel construction with stainless oven door. Interior shall have 3 rack positions. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. Oven shall be stackable. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, and ETL for safety and sanitation.

Optional Accessories



Intertek Intertek

Warranty

Pizza stone Drip tray Oven paddle

Limited 3 year warranty: Year 1 - parts, labor, and travel are covered. Years 2 - 3 - magnetron tube (part only) is covered.

Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.



Measurements in () are millimeters

* IEC 60705 Tested ** Includes handle



800-233-2366

319-368-8120 Product of the U.S.A.

Fax: 319-368-8198 © 2009 ACP Inc.™ www.acpsolutions.com

Printed in the U.S.A

AIA File #: