

DROP-IN SERVING EQUIPMENT

DISPLAY CASE

Refrigerated, Pass-Through Self-Contained

Item No. _____

Quantity _____

☐ **WCPT-3**

☐ **WCPT-4**



WCPT-3 SHOWN



DESCRIPTION:

The WCPT series pass-through merchandiser is the ideal display for all your pre-plated or pre-wrapped salads, desserts, and deli products. It's also the perfect display for bottled juices and specialty drink items. Large sliding, self closing glass doors on the operator's side, as well as on the customer's side, make loading a snap. The large display area is provided with adjustable height shelves and full lighting to enhance product display. The drop-in display case can be installed in virtually any counter and is fully self-contained - just plug it in and turn it on.

The pass-through is fully insulated for maximum efficiency and energy savings. The base of the unit is provided with a factory applied gasket so that it can be installed in the finest wood fixtures without marring the counter top. The

display case is constructed of stainless steel. The refrigeration system includes a forced air evaporator which drains into a condensate evaporator.

FEATURES:

- Large, lighted display area with adjustable shelves - it's the ideal merchandiser
- Sliding glass doors on customer's and operator's side, make loading and self-service move quickly
- Forced air evaporator blower system for maximum efficiency in cooling
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- UL recognized




a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475


DISPLAY CASE

Refrigerated, Pass-Through Self-Contained


	MODEL	"A"	ELECTRICAL CHARACTERISTICS	CUT-OUT REQUIRED	SHIP WT. (lbs.)	CUBIC FEET
<input type="checkbox"/>	WCPT-3	43-1/2	11.0 amps. - 120V 1/2 HP	22-1/4" X 41-3/4"	440	12 CU FT.
<input type="checkbox"/>	WCPT-4	57-1/4	11.0 amps. - 120V 1/2 HP	22-1/4" X 55-1/2"	520	16 CU FT.

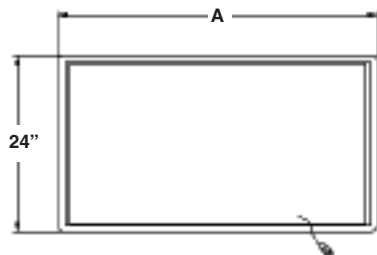

Plan View

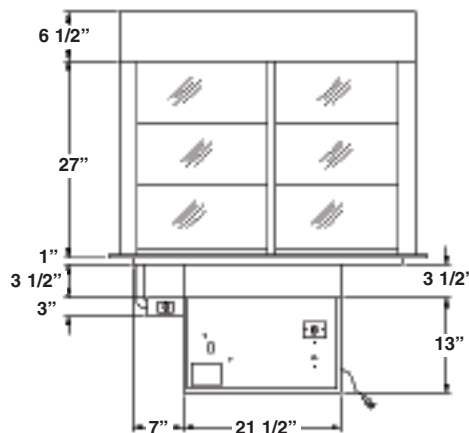

Elevation

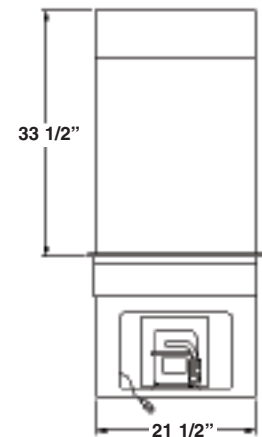

End View

SPECIFICATIONS:

TOP: Constructed of 18 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. The top is solid, full-length, to support the refrigerated display case. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top.

DISPLAY CASE: Double wall constructed of type 304 stainless steel - 20 gauge, both interior and exterior, and filled with 2" of foamed-in-place polyurethane insulation. Customer's side and operator's side are provided with a set of two (2) sliding, self-closing, thermo-pane insulated glass doors. The doors are removable for ease of cleaning. The display case is provided with two (2) plastic coated wire shelves, adjustable on 1" increments and two (2) sets of fluorescent light fixtures mounted behind plastic guards, which are recessed into the side panels. The light fixtures are provided with a separate on/off switch. An internal thermometer is provided.

REFRIGERATION SYSTEM: The compressor housing shall be fabricated from 14 gauge galvanized and bolted to the base of the unit. A fully self-contained condensing unit is provided with a hermetically sealed compressor and a thermostat control. The system is also provided with a forced air evaporator

for even temperature throughout the display case, and drains into a condensate evaporator pre-wired in the unit. The system is fully charged with CFC free refrigerant and ready to operate.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL: The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off thermostat switch and pilot light. A 6' long, 3-wire cord and plug (NEMA 5-15P) will be provided.

Specifications subject to change without notice.

ACCESSORIES:

- ☐ 5-year compressor warranty
- ☐ Solid back for single sided service
- ☐ Extra shelf
- ☐ Plastic laminate trim, specify color
- ☐ * 220V - 50 cycle compressor
- ☐ Transparent mirror on one side
- ☐ Door locking device
- ☐ Solid glass front
- ☐ Remote compressor
- ☐ Remote switch

Note: Units with these accessories * are not currently UL listed



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475