

SLIDE-IN UNITS

REFRIGERATED BASE


**Self-Contained
Solid Top, Under-Counter**

Item No. _____

Quantity _____

☐ **RB-4**

☐ **RB-5/RBD-5**

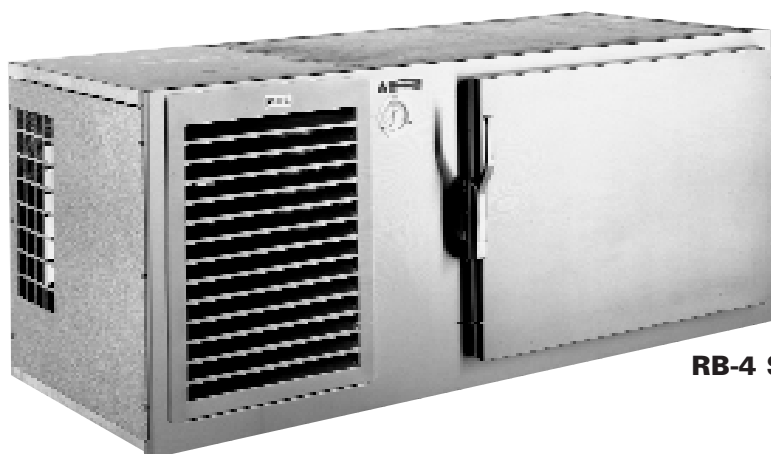

RB-4 SHOWN

**NOTE: NSF & UL
(FOR WCM ONLY)**



DESCRIPTION:

This convenient to use refrigerated base puts back-up storage where you need it most - directly at your finger tips. The unit simply slides into your existing fabricated counter.

Available in two sizes, with a single door or double door - with removable slide assemblies for standard 12" x 20" pans. All units are self-contained, prewired and charged with CFC free refrigerant, just plug it in and turn it on.

FEATURES:

- Builds into your counter- puts refrigeration where you need it
- Fully insulated for maximum efficiency
- Slide assembly for standard 12" x 20" pans
- Self-contained refrigeration
- NSF certified and UL recognized




a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475

REFRIGERATED BASE

Self-Contained Open Top

MODEL	"A"	STORAGE CAPACITY 12" X 20" PANS	CUT-OUT REQUIRED	ELECTRICAL CHARACTERISTICS	SHIP WT. (lbs.)
<input type="checkbox"/> RB-4	55-1/2"	10 Pans - 1 Door 8 cu. ft.	23-1/2" X 55-1/2"	6.8 amps. - 120 V 1/4 HP	270
<input type="checkbox"/> RB-5	69-1/4"	15 Pans - 2 Doors 10 cu. ft.	23-1/2" X 69-1/4"	6.8 amps. - 120 V 1/4 HP	340

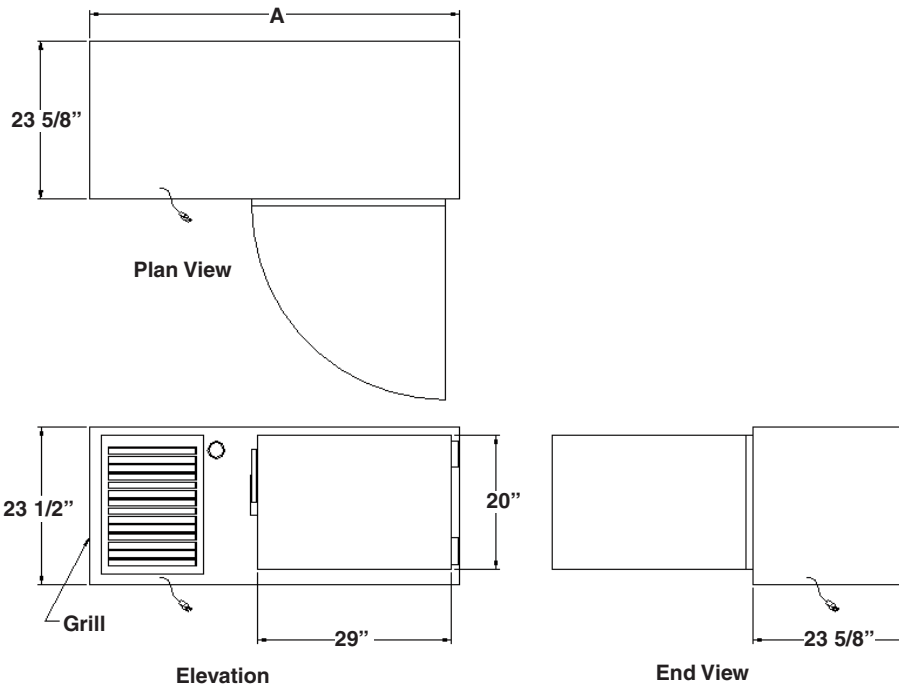

SPECIFICATIONS:

BODY: Double wall constructed with a 20 gauge, type 304 stainless steel interior liner, with coved corners. Exterior wall is 22 gauge galvanized steel, with an 18 gauge stainless steel facia. The body is filled with 1" of high density polystyrene insulation on all sides. The interior of the body is provided with a removable slide assembly to accommodate 12" x 20" pans. A 2-1/2" dial thermometer is mounted in the facia.

DOORS: Doors are double wall constructed of 18 gauge, type 304 stainless steel, fully insulated with high density polyurethane and provided with edge mounted, chrome plated hinges and a slam action latch. Doors are complete with a moisture-proof gasket.

REFRIGERATION SYSTEM: The compressor housing is integral with the body of the unit and provided with a removable, louvered access panel. A fully self-contained condensing unit is provided, with a hermetically sealed compressor and a thermostat control. The system is also provided with a forced air evaporator

for even temperature throughout the base and drains into a condensate evaporator, pre-wired in the unit. The system is fully charged with CFC free refrigerant and ready to operate, factory set, between 35° and 45° F.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL: The unit will be wired for 15 amp., 120 volt, single phase operation. A 6' long, 3-wire cord and plug (NEMA 5-ISP) will be provided.

Specifications subject to change without notice.

ACCESSORIES:

- ☐ 5-year compressor warranty
- ☐ Two (2 ea.) 20" x 20" x 5" deep drawers in lieu of one door. (Available on RB-S only - **Specify RBD-5**)
- ☐ 18" x 26" pan rack (Available on RB-4 only.)



a subsidiary of Mercury Aircraft
 1135 NW 159 Dr., Miami, Florida 33169
 Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475