



Model 909E



## Safety and Convenience Features

Berkel Model 909E manual gravity feed slicer features Berkel's time proven hollow ground stainless steel knife, built-in dual action sharpener and a number of safety features. The permanent, tapered guard covers the non-slicing portion of the knife even when the sharpener and center plate are removed. The unit is easy to clean and disassembles quickly without tools.

## Accessories

- ☐ Stainless steel vegetable chute with pusher
- ☐ Product fence
- ☐ Skewers with coring tool
- ☐ Sharpening kit
- ☐ Slaw tray
- ☐ Receiving tray
- ☐ Juice cup
- ☐ 4" Extension NSF legs (set of 4)

Approved By:_____
Date_____

Item # \_\_\_\_\_

# Model 909E

## Manual Gravity Feed Slicer

### Standard Features

- 1-speed, 1/2 HP, totally enclosed and permanently lubricated knife motor, thermally protected
- Furnished in 115/60/1, 4.5 amp, AC, ETL listed; also available in 1/3 HP, 220/60/1, 2.4 amp, AC, ETL listed
- Low 12/5 VDC circuitry for added operator protection
- Finish is stainless steel and sanitary burnished aluminum; unit disassembles quickly without tools for easy cleaning
- Nominal 12-1/2" (318 mm) diameter, hollow ground, hardened and polished forged stainless steel knife
- The carriage handles food up to 11" (280 mm) wide, by 6" (152 mm) high or 8" (203 mm) diameter
- Rear-mounted, stainless steel meat pusher extends over the entire length of the product table
- Precise slice adjustment to a thickness of 27/32" (21 mm)
- Ergonomic style handle for ease of use
- Built-in, top-mounted, two stone knife sharpener with single lever, dual-action system
- Permanent, tapered knife ring guard covers non-slicing portion of knife even when the sharpener and center plate are removed
- Q-P-Q nickel-plated transport slide rod with reservoir wick for reduced wear
- On/Off, 3-position, moisture resistant switch with power light
- Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle
- No-Volt release prevents activation of the slicer in the event of a power interruption; operator must restart the slicer

### Options

- ☐ 1/3 HP, 230/60/1, 2.9 amp, AC, ETL listed



Manual Gravity Feed Slicer Model 909E

Berkel Company • 4406 Technology Drive • South Bend, IN 46628-9700  
574-232-8222 • 800-348-0251 • FAX 888-888-2838 • [www.berkel.com](http://www.berkel.com)



# Model 909E

## Manual Gravity Feed Slicer

Model No.	Cutting Capacity	Slice Thickness	Knife Diameter	Product Dimensions		
				Width A	Depth B	Height C
909E	11" (280 mm) wide 6" (152 mm) high 8" (203 mm) dia.	to 27/32" (21 mm)	12-1/2" (318 mm)	20" (508 mm)	29" (737 mm)	21" (533 mm)

Motor	Electrical	Weight	Box Dimensions		
			Width	Depth	Height
1-speed 1/2 HP	115/60/1	Net 90 lbs. (41 kg) Ship 120 lbs. (55 kg)	32" (813 mm)	26" (660 mm)	27" (686 mm)

### Specifications

**Motor:** 1-speed, 1/2 HP, totally enclosed, permanently lubricated ball bearings, thermally protected.

**Electrical:** Furnished in 115/60/1, 4.5 amp, AC, ETL listed. Also available in 1/3 HP, 220/60/1, 2.4 amp, AC, ETL listed. Low 12/5 VDC circuitry for added operator protection.

**Finish/construction:** All food contact areas are stainless steel including the pusher, gauge plate, product table, center plate and knife; sanitary burnished aluminum ring guard and one-piece base with non-slip feet. Slicer disassembles quickly without tools for easy cleaning.


**Knife:** Nominal 12-1/2" (318 mm) diameter, hollow ground, hardened and polished forged stainless steel.

**Cutting Capacity:** Carriage handles food up to 11" (280 mm) wide by 6" (152 mm) high or 8" (203 mm) diameter.

**Slice Thickness:** Precision gear system with eccentric gear to prevent backlash, provides infinite slice adjustment and consistent cuts of hard or soft foods from tissue thin to 27/32" (21 mm).

**Full Gravity Feed:** Full 45° angle feed requires less mechanical pressure. Equipped with rear-mounted, stainless steel meat pusher that runs the entire length of the product table to hold product and minimize waste. An optional screw-in weight is also available. Ergonomic style handle for ease of use.

**Knife Sharpener:** Built-in, top-mounted, two stone, single lever, dual-action system for a lasting, razor-sharp edge. Unit is removable and submersible for easy cleaning.

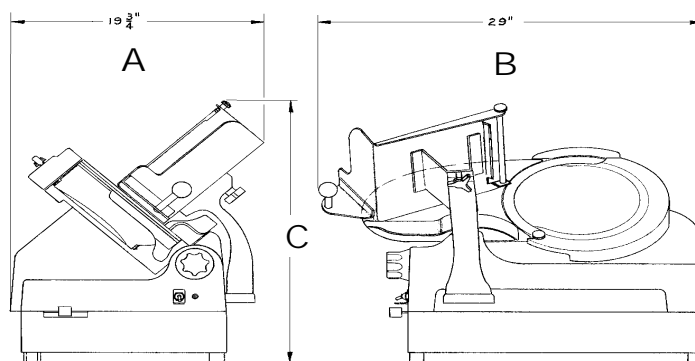

**Knife Ring Guard:** Permanent, tapered guard covers non-slicing portion of knife edge even when the sharpener and center plate are removed.

**No-Volt Release:** Prevents activation of the slicer in the event of a power interruption; operator must restart the slicer.

**On/Off Switch:** Highly reliable, moisture resistant, on/off switch and power light.

**Q-P-Q Nickel Plated Transport Slide Rod with Reservoir Wick:** E-nickel plated rod undergoes Q-P-Q impregnation increasing the lubricity of the stainless steel reducing wear properties of the rod and bushings.

**Cord and Plug:** Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

**Warranty:** All parts, service and travel coverage for one year, excluding wear items.

As we continually strive to improve our products, specifications are necessarily subject to change without notice.

Berkel Company • 4406 Technology Drive • South Bend, IN 46628-9700  
574-232-8222 • 800-348-0251 • FAX 888-888-2838 • [www.berkel.com](http://www.berkel.com)