



Item # _____

Model 919E Automatic Gravity Feed Slicer



Model 919E



Safety and Convenience Features

Berkel Model 919E automatic gravity feed slicer features Berkel's time proven hollow ground stainless steel knife, built-in, dual-action sharpener and a number of safety features. The tapered permanent guard covers the non-slicing portion of the knife even when the sharpener and center plate are removed. The unit is easy to clean and disassembles quickly without tools.

Accessories

- | | |
|--|---|
| <input type="checkbox"/> Stainless steel vegetable chute with pusher | <input type="checkbox"/> 4" Extension NSF legs (set of 4) |
| <input type="checkbox"/> Skewers with coring tool | <input type="checkbox"/> Slaw tray |
| <input type="checkbox"/> Sharpening kit | <input type="checkbox"/> Juice cup |
| <input type="checkbox"/> Receiving tray | <input type="checkbox"/> Product fence |

Standard Features

- 1-speed, 1/2 HP, totally enclosed and permanently lubricated knife motor
- 1-speed, automatic carriage produces 50 slices per minute
- Furnished in 115/60/1, 4.5 amp, AC, ETL listed; also available in 1/3 HP, 220/60/1, 2.4 amp, AC, ETL Listed
- Low 12/5 VDC voltage for added operator protection
- Finish is stainless steel and sanitary burnished aluminum; unit disassembles quickly without tools for easy cleaning
- Nominal 12-1/2" (318 mm) diameter, hollow ground, hardened and polished forged stainless steel knife
- The carriage handles food up to 11" (280 mm) wide, by 6" (152 mm) high or 8" (203 mm) diameter
- Rear-mounted, stainless steel meat pusher extends over the length of the product table
- Precise slice adjustment to a thickness of 27/32" (21 mm)
- Ergonomic style handle for ease of use
- Built-in, top-mounted, two stone knife sharpener with single lever, dual-action system
- Permanent, tapered knife ring guard covers non-slicing portion of knife even when the sharpener and center plate are removed
- Q-P-Q nickel plated transport slide rod with reservoir wick for reduced wear
- On/off, 3-position, moisture protected switch with power light
- Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle
- No-Volt release prevents activation of the slicer in the event of a power interruption; operator must restart the slicer

Options

- ☐ 1/3 HP, 220/60/1, 2.4 amp, AC, ETL listed

Approved By: _____
Date _____

Berkel Company • 4406 Technology Drive • South Bend, IN 46628-9700
574-232-8222 • 800-348-0251 • FAX 888-888-2838 • www.berkel.com





Model 919E

Automatic Gravity Feed Slicer

Model No.	Cutting Capacity	Slice Thickness	Knife Diameter	Slicing Speed	Product Dimensions		
					Width A	Depth B	Height C
919E	11" (280 mm) wide 6" (152 mm) high 8" (203 mm) dia.	to 27/32" (21 mm)	12-1/2" (318 mm)	50 SPM	20" (508 mm)	29" (737 mm)	24" (610 mm)

Motor	Electrical	Weight	Box Dimensions		
			Width	Depth	Height
1-speed 1/2 HP	115/60/1	Net 114 lbs. (52 kg) Ship 152 lbs. (69 kg)	32" (813 mm)	30" (762 mm)	30" (762 mm)

Specifications

Motor: 1-speed, 1/2 HP, totally enclosed, permanently lubricated ball bearings, thermally protected.

Carriage: 1-speed, automatic carriage produces 50 slices per minute.

Electrical: Furnished in 115/60/1, 4.5 amp, AC, ETL listed. Also available in 1/3 HP, 220/60/1, 2.4 amp, AC, ETL Listed. Low 12/5 VDC circuitry for added operator protection.

Finish/construction: All food contact areas are stainless steel including the pusher, gauge plate, product table, center plate and knife; sanitary burnished aluminum ring guard and one-piece base with non-slip feet. Slicer disassembles quickly without tools for easy cleaning.


Knife: Nominal 12-1/2" (318 mm) diameter, hollow ground, hardened and polished forged stainless steel.

Cutting Capacity: Carriage handles food up to 11" (280 mm) wide by 6" (152 mm) high or 8" (203 mm) diameter.

Slice Thickness: Precision gear system with eccentric gear to prevent backlash, provides infinite slice adjustment and consistent cuts of hard or soft foods from tissue thin to 27/32" (21 mm).

Full Gravity Feed: Full 45° angle feed requires less mechanical pressure. Equipped with a rear-mounted, stainless steel meat pusher that runs the entire length of the product table to hold product and minimize waste. An optional screw-in weight is also available. Ergonomic style handle for ease of use.

Knife Sharpener: Built-in, top-mounted, two stone, single lever, dual-action system for a lasting, razor-sharp edge. Unit is removable and submersible for easy cleaning.

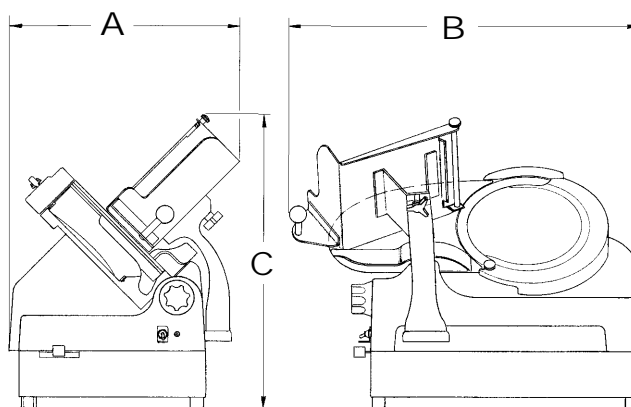

Knife Ring Guard: Permanent, tapered knife guard covers non-slicing portion of knife edge even when the sharpener and center plate are removed.

No-Volt Release: Prevents activation of the slicer in the event of a power interruption; operator must restart the slicer.

On/Off Switch: Highly reliable, moisture resistant, on/off switch and power light.

Q-P-Q Nickel Plated Transport Slide Rod with Reservoir Wick: E-nickel plated rod undergoes Q-P-Q impregnation increasing the lubricity of the stainless steel reducing wear properties of the rod & bushings.

Cord and Plug: Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

Warranty: All parts, service and travel coverage for one year, excluding wear items.

As we continually strive to improve our products, specifications are necessarily subject to change without notice.

Berkel Company • 4406 Technology Drive • South Bend, IN 46628-9700
574-232-8222 • 800-348-0251 • FAX 888-888-2838 • www.berkel.com