






MARK V XCEL




APPROVAL/STAMP

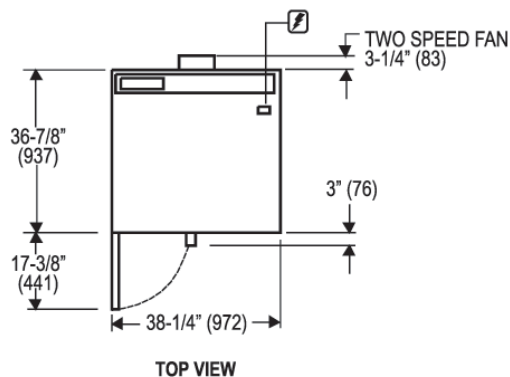

TOP VIEW

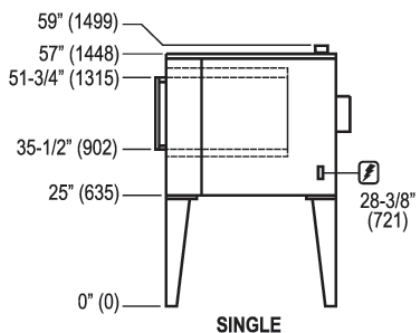

SINGLE

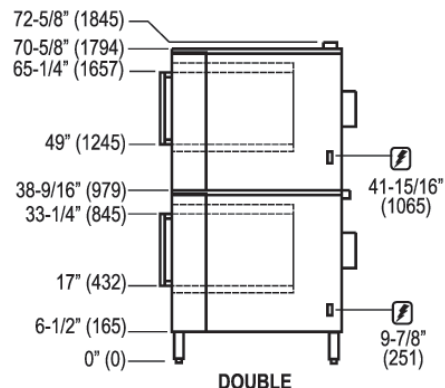

DOUBLE

Dimensions are in inches (mm)

SHORT FORM SPECIFICATIONS

Provide Blodgett full-size convection oven model Mark V XCEL, (single/double) compartment with fully welded angle iron frame. Each compartment shall have double-sided porcelainized or stainless steel liner. Liner to be covered top and bottom. Unit shall accept five 18" x 26" standard full-size bake pans. Doors shall be triple mounted, stainless steel with dual pane thermal glass windows, with single porcelain handle and simultaneous operation. Unit shall be electrically heated with three tubular heaters. Air in baking chamber distributed by single inlet blower wheel powered by a two-speed, 3/4 HP motor with thermal overload protection. Each chamber shall be fitted with bright halogen lamps, one chrome-plated EZ slide racks capable of holding 50 lbs, four standard chrome-plated removable racks and a two piece porcelain crumb pan. Control panel shall be recessed with Cook/Cool Down mode selector, solid state (manual/digital) thermostat (150 - 550° F), (66-288°C) and 60-minute timer. Breaker shut off switch on front panel for easy service. Two year oven parts and one year labor warranty and five year limited oven door warranty. Provide options and accessories as indicated.

DIMENSIONS:

| | |
|--|---|
| Floor space | 38-1/4" (972mm) W x 36-7/8" (937mm) D |
| Interior | 29" (737mm) W x 20" (508mm) H x 24-1/4" (616mm) D |
| If oven is on casters add the following to all height dimensions | |
| Single on casters | 4-1/2" (114mm) |
| Double on casters | 2-1/4" (57mm) |

Product clearance

| | |
|------------|---|
| Oven sides | 0" from combustible and non-combustible construction. |
| Oven back | 0" from combustible and non-combustible construction. |

MINIMUM ENTRY CLEARANCE:

| | |
|----------|------------------|
| Uncrated | 32-1/16" (814mm) |
| Crated | 37-1/2" (953mm) |

SHIPPING INFORMATION:

Approx. Weight

| | |
|--------|--------------------|
| Single | 590 lbs. (268 kg) |
| Double | 1145 lbs. (519 kg) |

Crate sizes

37-1/2" (952mm) x 43-1/2" (1105mm) x 46" (1168mm)
(2 crates required for double)

MAXIMUM INPUT:

| | |
|--------|--------------------------|
| Single | 11kW |
| Double | 22kW (11kW each section) |

POWER SUPPLY:

| V.A.C. | Hz | Phase | kW | Amperes (L1-L2-L3) |
|--|----|-------|----|--------------------|
| DOMESTIC | | | | |
| 208 | 60 | 1 | 11 | 51/0/51 |
| 208 | 60 | 3 | 11 | 31/29/29 |
| 220/240 | 60 | 1 | 11 | 44/0/44 |
| 220/240 | 60 | 3 | 11 | 26/24/24 |
| 440 | 60 | 3 | 11 | 15/14/14 |
| 480 | 60 | 3 | 11 | 14/13/13 |
| 3/4 H.P., 2 speed motor, 1140 and 1725 RPM (60Hz.) | | | | |

INTERNATIONAL

| | | | | |
|---|----|---|----|----------|
| 220/240 | 50 | 1 | 11 | 48/0/48 |
| 240/415 | 50 | 3 | 11 | 18/14/14 |
| 230/400 | 50 | 3 | 11 | 18/15/15 |
| 3/4 H.P., 2 speed motor, 950 and 1425 RPM (50Hz.) | | | | |

NOTE: The company reserves the right to make substitutions of components without prior notice.