

AutoPOD[®] Auto Eject Pod Brewer



AutoPOD Pod Brewer

Dimensions: 15.8" H x 9.7" W x 14.4" D
(40.1cm H x 24.6cm W x 36.7cm D)

Features

Commercial-grade, single-cup system with the convenience of automatic pod disposal

- Eliminates waste by brewing one fresh cup at a time from a wide variety of coffee and tea pods.
- Works with Flojet pump system.
- Brews up to 16 ounces (473mL) of coffee or tea in less than a minute.
- Control extraction utilizing pulse-brew technology with BrewMETER[®].
- Automatically disposes of spent pods after each brew.
- Removable pod bin holds up to 25 spent pods.
- Pod bin and drip tray can be modified for under-counter disposal of pods.
- Digital display in English/Spanish for easy programming, operation and control.
- Push and hold hot water button provides up to 10 ounces (296mL) of hot water for cappuccino, cocoa and soups.
- Integrated cup booster allows for 5" or 8" (12.7cm or 20.3cm) cup clearance.
- Energy-saver mode reduces tank temperature during idle periods.
- Recipe labels provided allow for customization of beverages dispensed.

For current specification sheets and other information, go to www.bunn.com.

Related Products

Brew Station

Product No.: 39501.0001
(brewer and accessories
not included)



Rack Assembly

Product No.: 39502.0001
(pods not included)



Coffee Wipes

Product No.: 38450.0000
individual towel



Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
AutoPOD	40300.0003	230	6.5	1450	1500	16 oz/minute (473mL/minute)	31 lbs (14.1 kg)	Yes - European	CE

Pump model for use in areas with inconsistent water pressure. Compatible with use on a Shurflo or Flojet pump system.

Brewing capacity: based upon incoming water temp of 60°F/15°C (140°F/60°C rise).

Electrical: Model requires 2-wires plus ground service rated 220-240V, single phase, 50/60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" OD male flare fitting. Tank capacity: 17oz. (503mL).

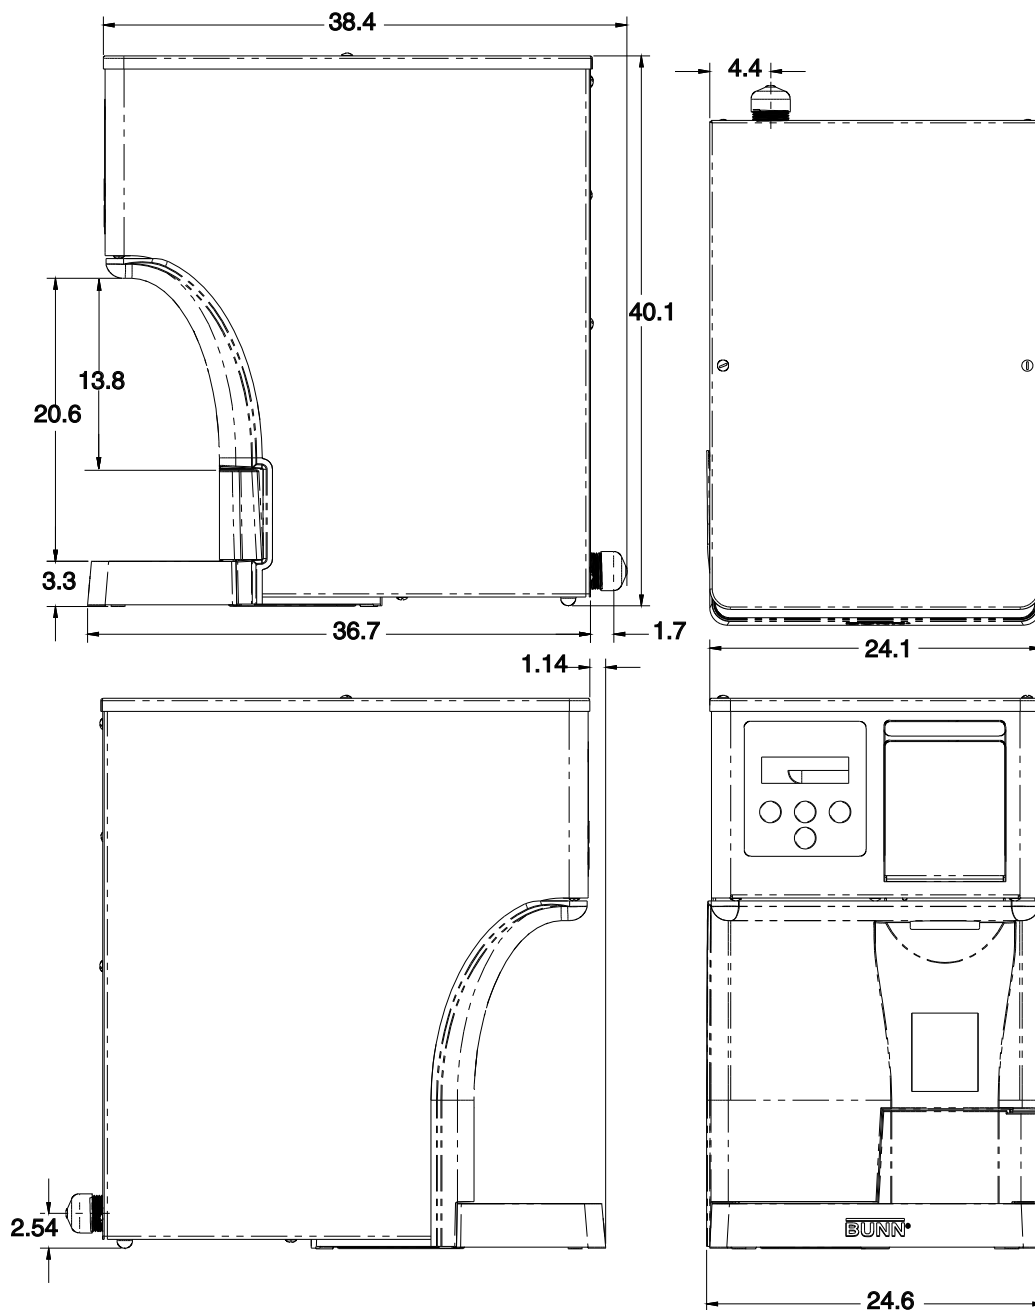

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

10/11 © Bunn-O-Matic Corporation