

BrewWISE® Dual Soft Heat® DBC Brewer

ITEM#

PROJECT

DATE



Model Dual SH DBC
1.5 gallon SH Servers*
(servers sold separately)

Dimensions: 35.8" H x 18" W x 21.2" D
(90.9cm H x 45.7cm W x 53.8cm D)

Features

BrewWISE® Brewing System

- Brews 18.9 gallons (71.5 liters) of perfect coffee per hour.
- Brews ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 liter) batches.
- Stores individual coffee and flavor profiles using adjustable water volume, bypass percentage, Pulse-Brew, and pre-infusion timing.
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface via Smart Funnel.
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present.
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools.
- Simplify installation and calibration by creating your own recipe cards and dedicated funnels with the BrewWISE Recipe Writer on your PC (Windows® compatible).
- International electrical configurations available.

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-25L
Product No. : 39000.0002



Easy Clear® EQHP-25
Product No. : 39000.0005

Single/Dual Filter Pack
Product No. : 20138.0000
Packed per case: 500
Dimensions:
5¼" Base x 4¼" Sidewall
13.3 cm Base x 10.8 cm Sidewall



BrewWISE® Recipe Writer (BRW)
Product No.: 34444.0000



Recipe Card
Product No.: 34447.0000
• Program a recipe to be used on brewer or grinder.



Ad Card
Product No.: 34448.0000
• Program a message to appear on the brewer's display.



Two Position Drip Tray
Product No.: 27150.0000



SH Server
Product No. : 27850.6001



2SH Stand
Product No. : 27875.6000



MHG
Product No.: 35600.6000



G9-2T DBC
Product No.: 33700.6000

Model

Dual SH DBC

Agency Listing



Dimensions & Specifications

CANADA



Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Cord Attached
Dual SH DBC	33500.6000	120/240	29.1	2@3300	6800	18.9 gal/71.63 liter	13.3/.37	90/40.8	No
Dual SH DBC [†]	33500.6001	120/240	29.1	2@3300	6800	18.9 gal/71.63 liter	13.3/.37	90/40.8	No
SH Server(1.5 gal.)	27850.6001	n/a	n/a	n/a	n/a	1.5 / 5.68	2.2/.06	18/8.2	No
1SH Stand	27825.6000	120	.8	n/a	90	Holds 1 SH Server	1.7/.05	13/5.9	Yes
2SH Stand	27875.6000	120	1.5	n/a	180	Holds 2 SH Servers	2.8/.08	22/10.0	Yes


[†]Model has funnel lock system. Note: Soft Heat® Brewers and Servers are boxed and shipped separately.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" (6.4 mm) male fitting.

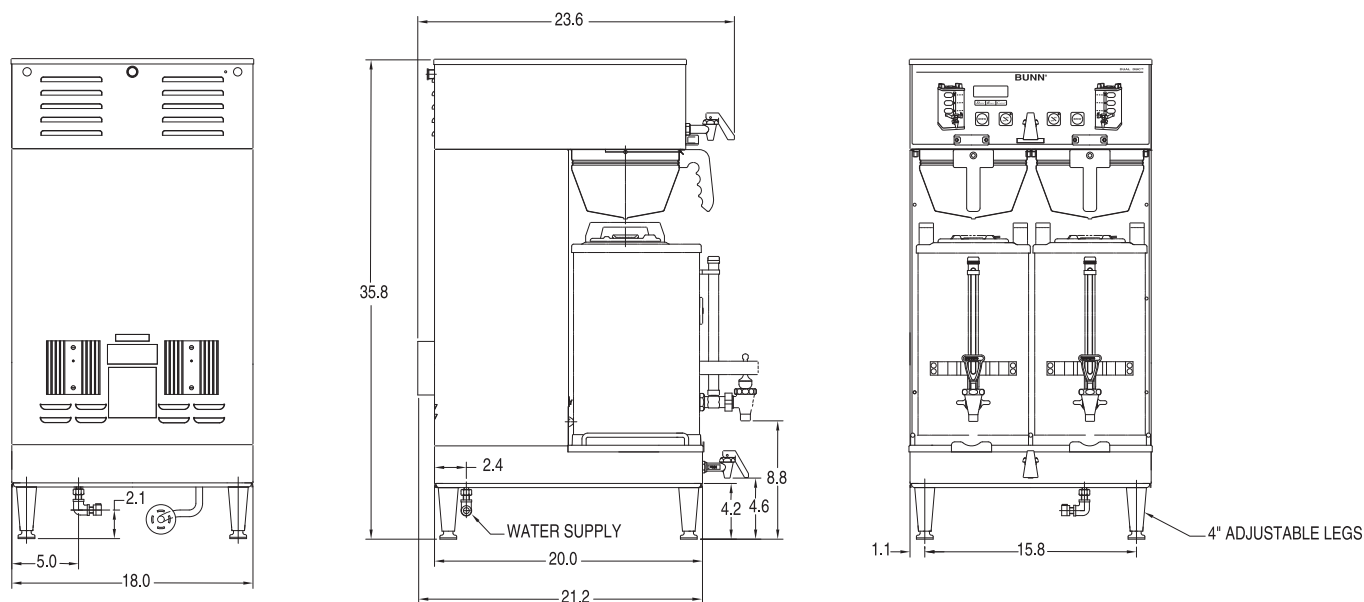

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.