



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

F14EW**31.50" (80 cm) Deep Electric Hot Food Tables — Single Tank****Short Form Specifications**

Exterior top is one-piece 16-gauge stainless steel, with integral 2.12" (5.6cm) square nosing on front and 4" (10.1cm) high by 2.00" (5.1cm) thick backsplash on rear. Interior sides are 22-gauge stainless steel.

Top to have 11.87"x 19.87" (30.2cm x 50.5cm) openings to hold pans (supplied by others). Unit has (1) 16-gauge stainless steel tank with 1" (2.5cm) drain with gate valve. Units 32", 48" or 60" in length have (1) 5 kw electric immersion heater; 72" and 88" lengths have (2) 5 kw electric immersion heaters located beneath openings. Heaters are standard at 240V, single phase (*208V available upon request). Control to be mounted in front edge of 8" (20.3cm) wide stainless steel plate shelf.

Manual fill faucet that extends 2.5" (6.4cm) above backsplash is standard.

Lower portion of unit to have 22-gauge stainless steel open shelf.

Electrical connections are 120/240V. Unit must be hard wired.

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

NOTE: Model F14EW hot food tables are designed to be operated with water in the tank only. Use of the equipment without water in the tank will result in damage to the equipment and will void the warranty.

**Model F14EW23Z**



Shown with optional cutting board

Optional Accessories & Modifications


- 906A** Stainless steel end
 - 505B** Stainless steel back
 - 906E** Laminate end
 - 505A** Laminate back
 - 204C** Auto fill assy (mechanical float)
 - 204D** Auto fill assy (electric probe)
 - 1030A** Cutting board (.5" x 10" composite)
 - 108** Locks
 - 726A** Dry drawers — 19"
 - 726B** Dry drawers — 27"
 - 726C** Dry drawers — 32"
 - 216** *Three phase electrical system
- *Inclusion of this option will alter the electrical specifications of the unit.



Delfield's
MARK7
modular equipment

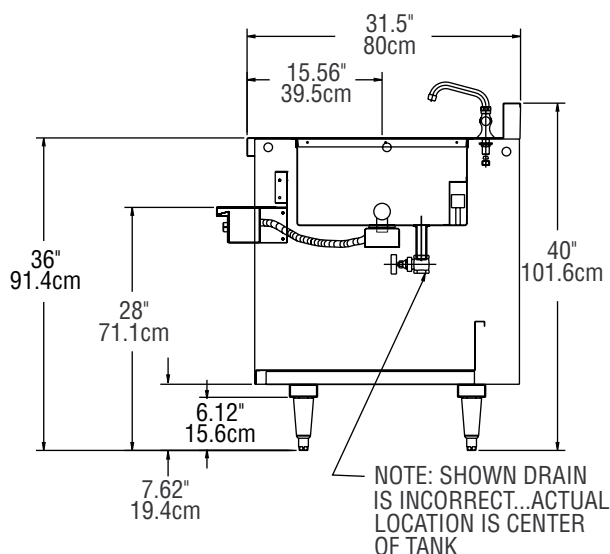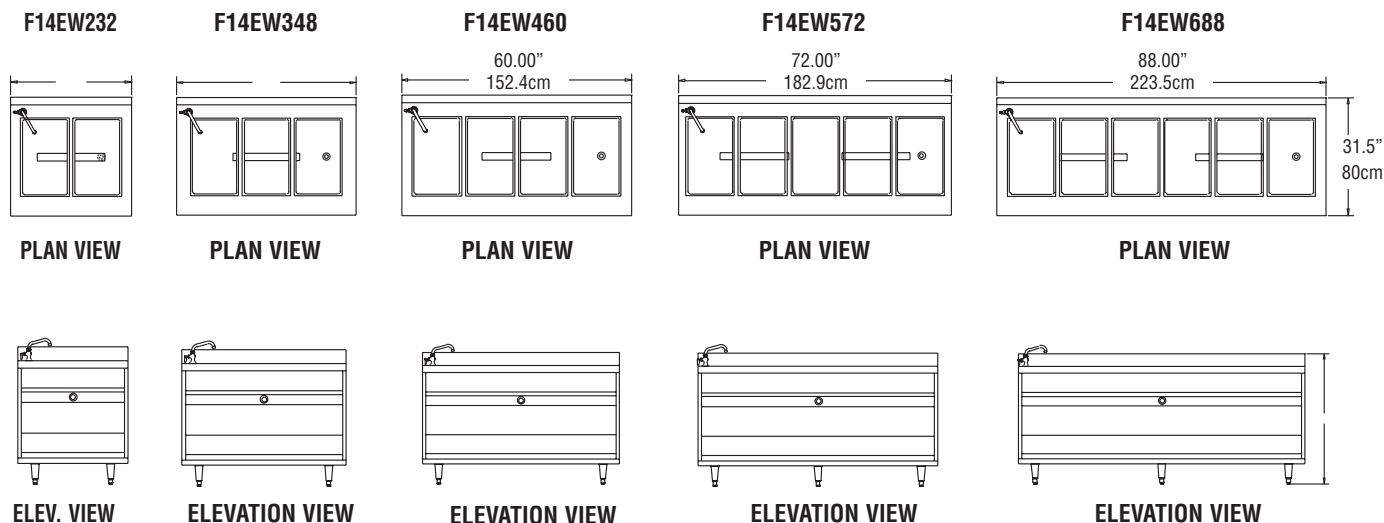

END VIEW ALL MODELS

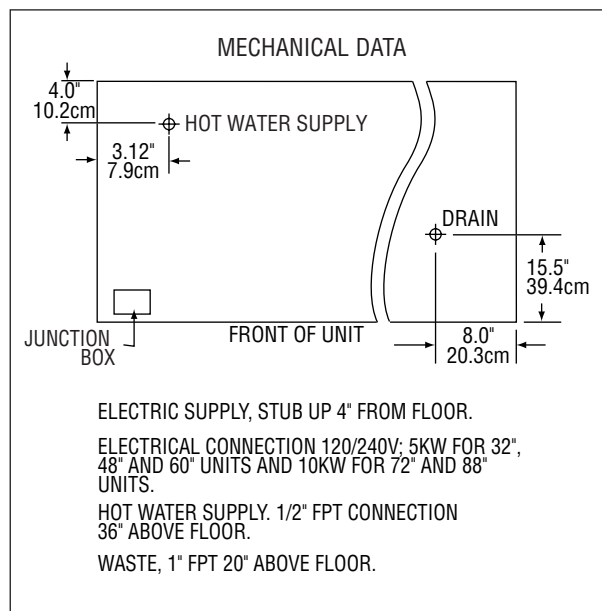

Mechanical Data—Standard Unit

MODEL NUMBER	NUMBER OF OPENINGS	AMPS 240 / 208 OPT.	SHIP WEIGHT
F14EW232	2	21.0/24.0	316 lbs / 143 kg
F14EW348	3	21.0/24.0	440 lbs / 199 kg
F14EW460	4	21.0/24.0	500 lbs / 227 kg
F14EW572	5	42.0/48.0	560 lbs / 254 kg
F14EW688	6	42.0/48.0	660 lbs / 299 kg

Electrical connections are 120/240 volt or optional 120/208 volt. (120 volt circuit is required for the auto-fill system.) Designed for wet operation only.