



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

F18FR

31.5" (80cm) Deep Remote Freezer Base Work Tables

Short Form Specifications

Exterior Top to be constructed of one piece 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing on front and 4" (10.2cm) high by 2" (5.1cm) thick backsplash on rear. Top to be insulated with 2" (5.1cm) high density insulation.

Base interior to have 22-gauge stainless steel back and bottom. Interior ends and door frames to be thermoformed ABS plastic. Base to be insulated with 1.50" (3.8cm) high density foamed in place polyurethane.

Exterior back and bottom of base to be 24-gauge galvanized steel. Exterior ends to be constructed of 18-gauge galvanized steel.


Door(s) have a thermoformed ABS plastic interior liner and 22 gauge stainless steel exterior front. Door(s) have black recessed handle(s) and a snap-in magnetic gasket which is easily replaceable. Unit to be furnished with (1) epoxy coated wire shelf for each door section.

Base to be furnished with blower coil with coil housing to enclose expansion valve and fans. Unit is provided with defrost timer, thermostat and solenoid valve in mechanical section. Unit is designed to maintain 0°F (-18°C) to -5°F (21°C).

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

Refrigeration System Components— HFC-404A

Electrical connections are 115 volt, 60 Hertz, single phase. Unit must be hard wired.

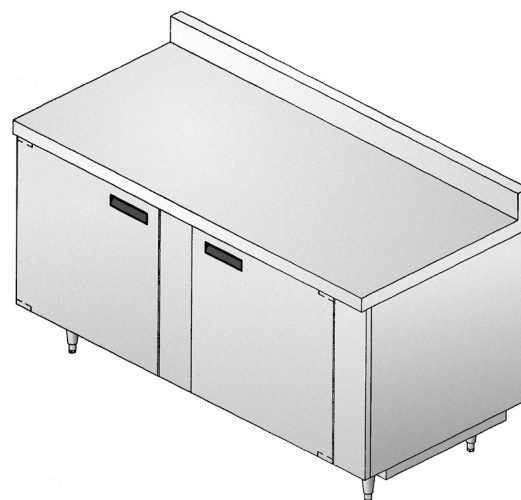

Model F18FR66

Optional Accessories & Modifications


- 906A Stainless steel end
- 505H Stainless steel back
- 505F Laminate facing (full front)
- 906E Laminate end
- 905A Laminate back
- 1030A Cutting board (.5" x 10" composite)
- 107F Tray rack
- 102 Drawers
 - A-(2) 19" in lieu of one door
 - B-(2) 27" in lieu of one door
 - C-(2) 32" in lieu of one door
 - E-(3) 19", 27" or 32" in lieu of one door
- 108 Locks
- 213 *220V/50 cycle

*Inclusion of this option will alter the electrical specifications of the unit




Delfield's
MARK7
modular equipment


31.5" (80cm) Deep Remote Freezer Base Work Tables




ELEVATION VIEW
F18FR35




ELEVATION VIEW
F18FR50




ELEVATION VIEW
F18FR58





PLAN VIEW
ALL MODELS

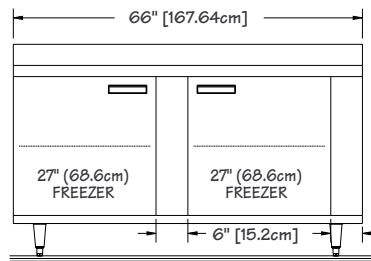

ELEVATION VIEW
F18FR66

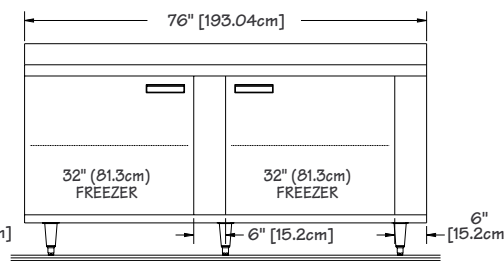


ELEVATION VIEW
F18FR76

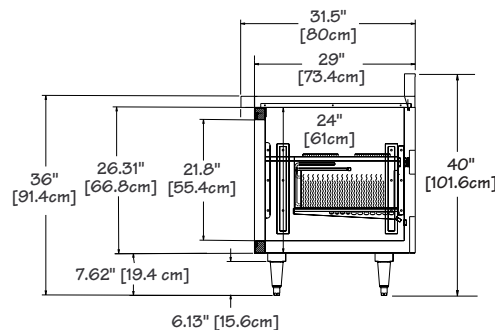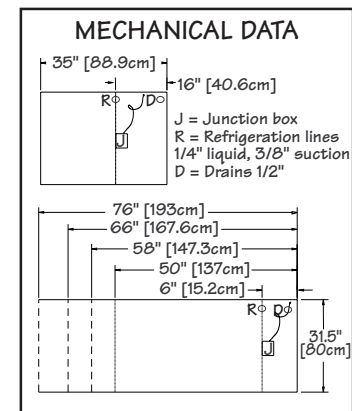


END VIEW
ALL MODELS



19" [48.3cm]
DOOR



27" [68.6cm]
DOOR



32" [81.3cm]
DOOR

Mechanical Data—Standard Unit

MODEL NUMBER	NUMBER OF DOORS	STORAGE CU. FT.	SHELF AREA SQ. FT.	BTU LOAD	EVAP. CAPACITY BTU/°TD	H.P.*	VOLTS/HERTZ/ PHASE	AMPS	SHIP WEIGHT LBS / KG
F18FR35	(1) 19"	5.58	2.56	943	160	1/3	115/60/1	10.0	310/140
F18FR50	(2) 19"	12.21	5.12	1471	160	1/2	115/60/1	10.0	370/168
F18FR58	19" & 27"	15.00	6.51	1844	160	3/4	115/60/1	10.0	400/181
F18FR66	(2) 27"	17.79	7.90	2020	160	3/4	115/60/1	10.0	425/193
F18FR76	(2) 32"	21.28	9.64	2437	160	3/4	115/60/1	10.0	450/204

*Recommended horsepower