



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

KCM**Mobile Milk Counters****Short Form Specifications**

Exterior Body is seamless, one-piece molded fiberglass, having perfectly smooth exterior surface with all corners fully rounded. The fiberglass reinforced polyester (F.R.P.) is molded with permanent color. Stress points are internally reinforced.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners. Top has one (KCM-36), two (KCM-50), three (KCM-60) or four (KCM-74) die-stamped openings and is provided with hinged removable lids. Lids are constructed of stainless steel and have a rubber gasket seal.

Refrigerated Compartment; have water-tight inner liner constructed of 22-gauge stainless steel, with radius corners and 1.5" (3.8cm) of polyurethane insulation. Compartment is equipped with a drain plumbed to a drain valve located in the bottom of the unit. Refrigerated compartment is equipped with automatic self leveling, field adjustable elevators. Divider trays are supplied.

Refrigeration; copper refrigeration coils are attached to outside of inner liner. Unit is refrigerated by self-contained, 115 volt, 60 Hertz, single phase hermetically sealed condensing unit with thermostatic control. Unit is wired with a 3-wire, grounded, maximum 10' (3m) 120 volt cord and plug. Refrigeration system use HFC-134A refrigerant

Casters; unit is mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).


Optional Accessories and Modifications

- A) 12" (30.5cm) wide stainless steel fold-down tray slide
- C) 10" (25.4cm) wide three-bar fold-down tray slide
- E) 10" (25.4cm) wide stainless steel fold-down work shelf
- F) Line-up interlock device
- R) 10" x 17" x 4" (25.4cm x 43.2cm x 10.2cm) deep chrome wire baskets
- S) Stainless steel lid locking device with "T" handle
- U) 14" x 30" (35.6cm x 76.2cm) stainless steel end drop shelf
- UU) Molded fiberglass trim strips
- V) 6" (15.2cm) high adjustable stainless steel legs in lieu of casters




Model KCM-50
shown with option C




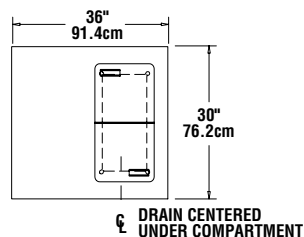


**PLAN VIEW
KCM-36**

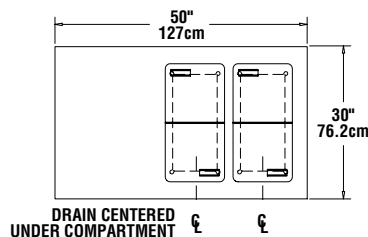


**PLAN VIEW
KCM-50**

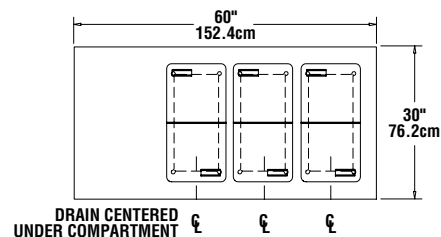


**PLAN VIEW
KCM-60**

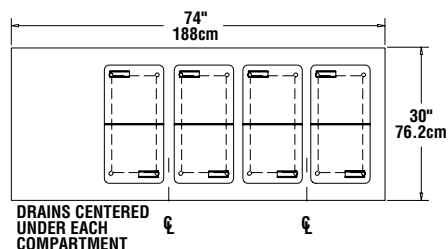


**PLAN VIEW
KCM-74**

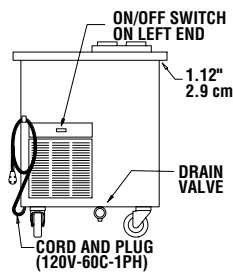


**ELEVATION VIEW
KCM-36**

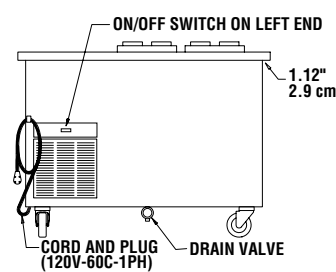


**ELEVATION VIEW
KCM-50**

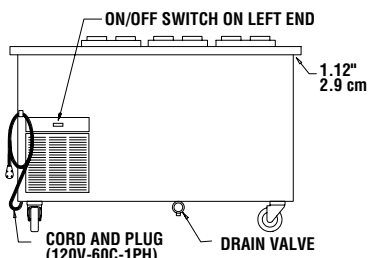

**ELEVATION VIEW
KCM-60**

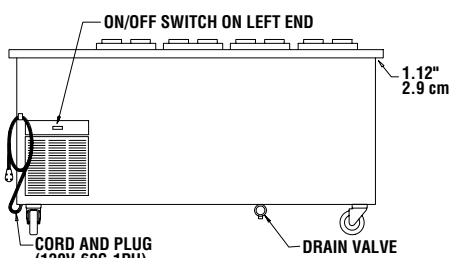

**ELEVATION VIEW
KCM-74**



**END VIEW
ALL MODELS**

Mechanical Data—Standard Unit

MODEL NUMBER	MILK CAPACITY*	H.P.	VOLTS/HERTZ/ PHASE	AMPS	NEMA PLUG	SHIP WEIGHT
KCM-36	126	1/4	120/60/1	5.0	5-15P	400 lbs/181 kg
KCM-50	252	1/4	120/60/1	5.0	5-15P	450 lbs/204 kg
KCM-60	378	1/4	120/60/1	5.0	5-15P	500 lbs/227 kg
KCM-74	504	1/3	120/60/1	6.0	5-15P	550 lbs/250 kg

*Based on 0.5 pint (237ml), 2.75" x 2.75" (7cm x 7cm) gable top cartons.