

PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

SCFM

Mobile Milk and Ice Cream Counters

Short Form Specifications

Exterior body is constructed of 18-gauge stainless steel side panels and 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with 14-gauge galvanized channel supports.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners. Top has die-stamped openings and is provided with hinged removable lids. Lids are constructed of stainless steel and have a rubber gasket seal.

Refrigerated and Freezer Compartments unit has one refrigerated and one freezer compartment each. Compartments have water-tight inner liner constructed of 22-gauge stainless steel, with radius corners and 1.5" (3.8cm) of polyurethane insulation. Both compartments are equipped with a drain plumbed to a drain valve located in the bottom of the unit. Refrigerated and freezer compartments are equipped with automatic self leveling, field adjustable elevators. Divider trays are supplied.

Refrigeration copper refrigeration coils are attached to outside of inner liner. Unit is refrigerated by self-contained, 115 volt, 60 Hertz, single phase hermetically sealed condensing unit with pressure control. Unit is wired with a 3-wire, grounded, maximum 10' (3m) 120 volt cord and plug.

Casters unit is mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).




Model SCFM-50


Optional Accessories and Modifications

- A) 12" (30.5cm) wide stainless steel fold-down tray slide
- C) 10" (25.4cm) wide three-bar fold-down tray slide
- E) 10" (25.4cm) wide stainless steel fold-down work shelf
- F) Line-up interlock device
- R) 10" x 17" x 4" (25.4cm x 43.2cm x 10.2cm) deep chrome wire baskets
- S) Stainless steel lid locking device with keyed lock
- ST) Stainless steel trim strips
- U) 14" x 30" (35.6cm x 76.2cm) stainless steel end drop shelf
- V) 6" (15.2cm) high adjustable stainless steel legs in lieu of casters
- X) Laminate exterior panels in lieu of stainless steel exterior panels




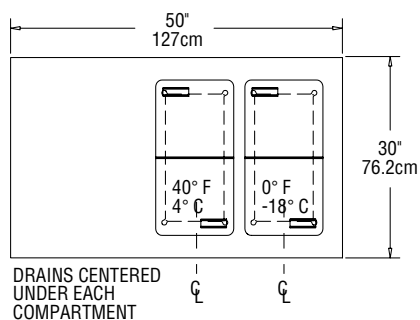


**PLAN VIEW
SCFM-50**

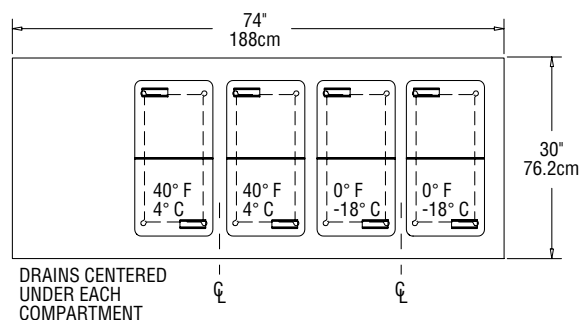


**PLAN VIEW
SCFM-74**

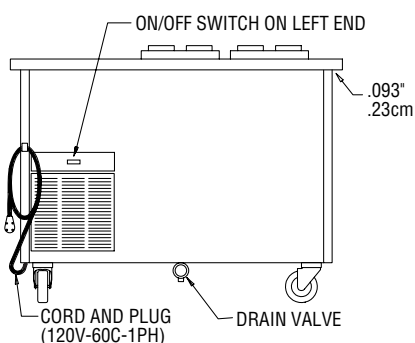

**ELEVATION VIEW
SCFM-50**

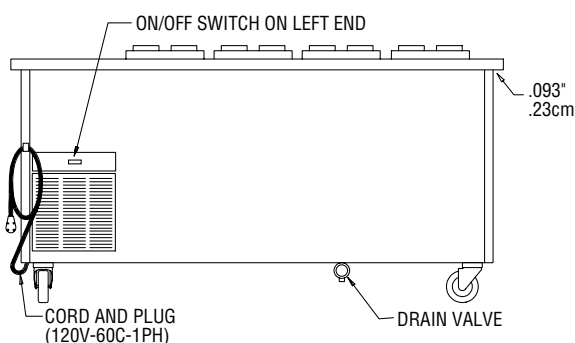

**ELEVATION VIEW
SCFM-74**

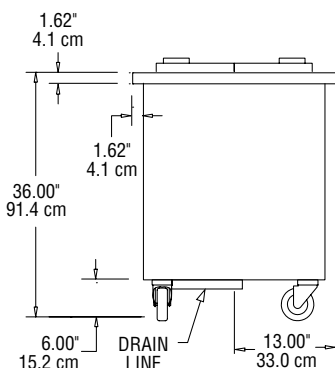

**END VIEW
ALL MODELS**

Mechanical Data—Standard Unit

MODEL NUMBER	MILK CAPACITY*	ICE CREAM CAPACITY**	H.P.	VOLTS/HERTZ/ PHASE	AMPS	NEMA PLUG	SHIP WEIGHT
SCFM-50	126	210	1/4	120/60/1	6.0	5-15P	500 lbs/227 kg
SCFM-74	252	420	1/3	120/60/1	8.0	5-15P	590 lbs/268 kg

*Based on 0.5 pint (237ml), 2.75" x 2.75" (7cm x 7cm) gable top cartons.

**Based on 3 oz. (85g), 3" (7.6cm) diameter cups.

The Delfield Company, 980 S. Isabella Rd., Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com

Delfield reserves the right to make changes in design or specifications without prior notice. ©2002 The Delfield Company. All rights reserved. Printed in U.S.A.

SSSCFM 02/02