

## SE-ICE/SES-ICE

### Mobile Ice Cream Counters

#### Short Form Specifications

**Exterior Body:** Open frame construction with 16-gauge stainless steel corners: 18-gauge stainless steel full bottom shelf and stainless steel C channel front and sides for optional accent panels.

**Exterior Top:** Constructed of 16-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners. Top has die-stamped openings, with hinged removable lids. Lids are constructed of stainless steel and have a rubber gasket seal.


**Freezer Compartment:** A water-tight inner liner constructed of 22-gauge stainless steel, with radius corners and 1.5" (3.8cm) of polyurethane insulation.

**Refrigeration:** Copper refrigeration coils are attached to outside of inner liner. Unit is refrigerated by self-contained, 115 volt, 60 hertz, single phase hermetically sealed condensing unit with thermostatic control. Unit is wired with a 3-wire, grounded, maximum 10' (3m) 120 volt cord and plug.

**Casters:** Units are mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).

#### Optional Accessories and Modifications


- SE-A** 10" stainless steel fold-down tray slide
- SE-D** 8" polyethylene fold-down cutting board
- SE-E** 8" stainless steel fold down work shelf
- SE-F** Interlock device
- SE-Q** 115/15A outlet
- SE-U** 14"x29" stainless steel end drop shelf
- SE-V** Adjustable stainless steel leg

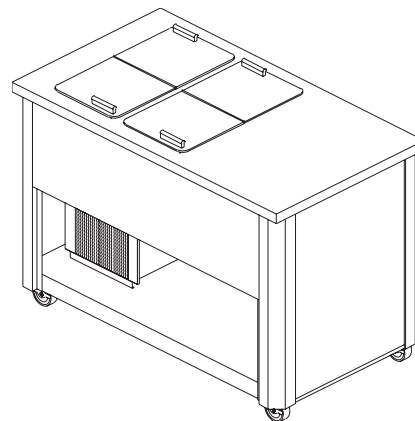


**SE-ICE2**

# SE-ICE/SES-ICE


## Mobile Ice Cream Counters

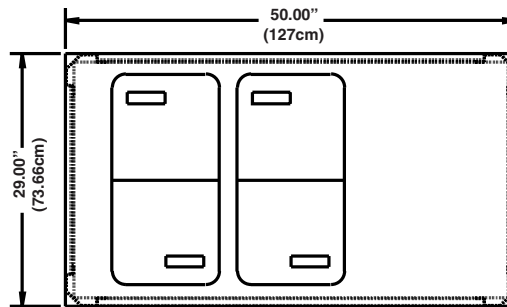

**PLAN VIEW**

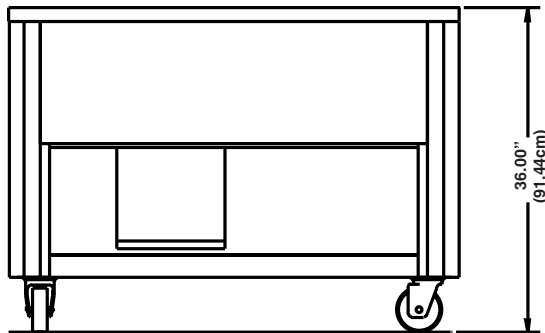

**ELEVATION VIEW**



**END VIEW**

### Mechanical Data - Standard Unit

MODEL NUMBER	CABINET CAP.	L	D	H	NEMA PLUG	VOLTS	AMPS	HP	SHIP WT	FRT. CLASS
<b>ICE CREAM COUNTERS - 0 DEGREES ONLY</b>										
<b>SE-ICE1</b>	84 CUPS	39"	29"	36"	5-15P	115/60/1	5.3	1/4	460	100
<b>SE-ICE2</b>	224 CUPS	50"	29"	36"	5-15P	115/60/1	5.3	1/4	505	100

Add S for 30" high models. (example SES-ICE1)

Capacity on 30" high models: SES-ICE1 = 42 and SES-ICE2 = 112



The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • [www.delfield.com](http://www.delfield.com)

Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.

DSSEICE 02/04