



Concepts™ Serving Systems


Self-Contained Frost Top Serving Counter

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Concepts™ Serving Systems: Self-Contained Frost Top Serving Counter

Models

- DC-FT2 Self-contained frost top serving counter, fits 24.13" x 19.29" frost top
- DC-FT3 Self-contained frost top serving counter, fits 37.13" x 19.29" frost top
- DC-FT4 Self-contained frost top serving counter, fits 49.07" x 19.29" frost top
- DC-FT5 Self-contained frost top serving counter, fits 63.13" x 19.29" frost top
- DC-FT6 Self-contained frost top serving counter, fits 76.13" x 19.29" frost top

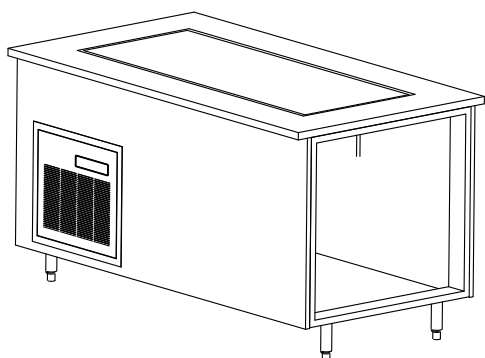

DC-FT4

Standard Features

- Heavy duty stainless steel top
- Reinforced stainless steel front and rear removable panels
- Heavy duty base support structure
- Standard on 6" legs
- 18-gauge stainless steel one piece construction and perimeter trough
- 0.5" stainless steel drain
- Must be hard wired in field
- 36" work height
- One year parts and labor standard warranty

Options & Accessories

- Custom lengths available per inch
 - Granite, Hanstone and Solid Surface top materials
 - Laminated base panels
 - Finished stainless steel or laminated end panels
 - Décor panels
 - Graphics packages
 - FlexiShield® foodshields
 - Signage with overstructures, lights and heatlamps
 - Refrigerated base inserts
 - Heated base inserts
 - Dry storage base inserts
 - Mechanical access doors
 - Casters (stand alone units only)
 - Kickplates (units with legs only)
 - Tray slides
 - 34" and 30" work heights
 - 220V/50 cycle electrical system*
- * Inclusion of this option will alter electrical specifications of the unit

Specifications

Exterior body is constructed of 0.75" Melamine reinforced front and rear panels with 22 gauge stainless steel skin and 1" polyethylene horizontal rib supports. Horizontal brace on rear is constructed of 18 gauge galvanized steel. The exterior ends are unfinished.

Exterior top is constructed of 14 gauge stainless steel. Horizontal top supports on front and rear are constructed with 18 gauge galvanized steel. Top end supports are 12 gauge stainless steel.


Interior base bottom is constructed of 16 gauge galvanized steel. Vertical base support braces are 14 gauge galvanized steel.

Frost top is 18-gauge stainless steel, one-piece construction and perimeter trough. Underside of frost top is sealed with refrigeration lines and insulated with high density, closed cell polyurethane. Frost top assembly is enclosed in a galvanized steel jacket.


Refrigeration system uses HCFC-404a refrigerant and has a self-contained 115 volt, 60 Hertz, single phase hermetically sealed condensing unit with adjustable frost top temperature control. Unit has an on/off switch mounted behind the mechanical access door. Frost top is equipped with a 0.5" stainless steel drain plumbed to drain valve located behind the hinged louvered door.

Legs: Bases mounted on 6.12" adjustable legs.







DC-FT2 Plan View




DC-FT3 Plan View

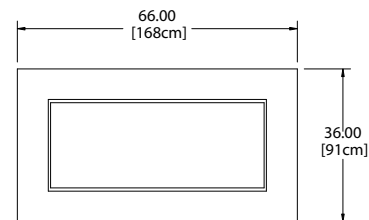


DC-FT4 Plan View




DC-FT2 Elevation View




DC-FT3 Elevation View




DC-FT4 Elevation View

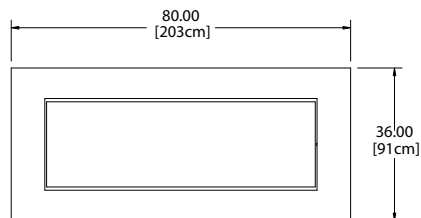


DC-FT5 Plan View

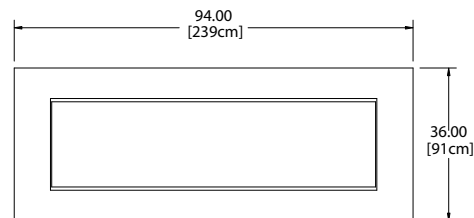


DC-FT6 Plan View



DC-FT5 Elevation View

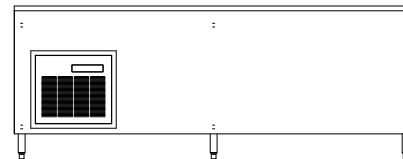

DC-FT6 Elevation View



All Models Right Side View

Specifications

Model	Length	Depth	Height	H.P.	V/Hz/Ph	Amps	Ship Weight
DC-FT2	38.00"	36.00"	36.00"	1/4	115/60/1	7.5	399lbs/181kg
DC-FT3	52.00"	36.00"	36.00"	1/4	115/60/1	7.5	546lbs/248kg
DC-FT4	66.00"	36.00"	36.00"	1/4	115/60/1	7.5	693lbs/314kg
DC-FT5	80.00"	36.00"	36.00"	1/4	115/60/1	7.5	840lbs/381kg
DC-FT6	94.00"	36.00"	36.00"	1/3	115/60/1	8.0	987lbs/448kg

Delfield reserves the right to make changes to the design or specifications without prior notice.