



F18MR

31.5" (80cm) Deep Remote Mega Top Salad Tables


Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

F18MR:

31.5" (80cm) Deep Remote Mega Top Salad Tables

Models

- F18MR31A - (6) 1/6 pan capacity remote 31" length salad refrigerator
- F18MR44A - (6) 1/6 pan capacity remote 44" length salad refrigerator
- F18MR44D - (12) 1/6 pan capacity remote 44" length salad refrigerator
- F18MR52A - (6) 1/6 pan capacity remote 52" salad refrigerator
- F18MR52D - (12) 1/6 pan capacity remote 52" length salad refrigerator
- F18MR52E - (18) 1/6 pan capacity remote 52" length salad refrigerator

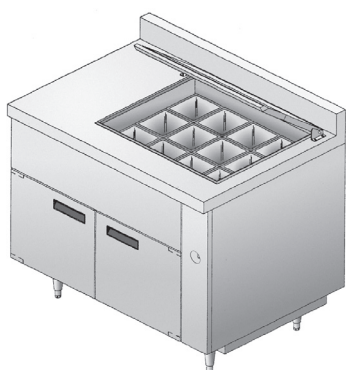

F18MR44D

Standard Features

- 16-gauge stainless steel top construction
- Unfinished ends
- Interior sub-top is made of ABS plastic
- 2BF stainless steel refrigerated base interior back and bottom
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation throughout unit
- Refrigerated base fronts are made of .095" thick ABS plastic backed by rigid polyurethane water blown injection molded frames. (NO WOOD)
- Exterior drawer fronts are stainless steel with ABS plastic liner
- Snap-in dart style vinyl magnetic gasket
- Recessed black plastic handle held in with a positive lock system


- 14-gauge leg rails run the entire length
- 6.12" adjustable stainless steel legs and bullet feet
- Environmentally friendly HFC-404A refrigerant
- Cold pan to have 2BF stainless steel interior with pans recessed 2.00"
- Cold pan is sized for three 1/6-size pans deep. Pans and adapter bars by others
- Cold pan has a on/off switch and maintains NSF7 temperatures utilizing a thermostat
- Interior base cabinet is cooled with mullion style evaporator blower coils (coated) mounted between each door/drawer section for very even air and temperature control
- Refrigerator interior maintains 36° to 40° at 100° ambient room temperature
- One year parts and 90 day labor standard warranty

Options & Accessories


- Stainless steel end or back
- Laminate facing (full front)
- Laminate end or back
- Polyethylene or composite cutting board
- Condensate evaporator (1 per coil) for base
- Tray rack
- Drawers in lieu of door, 19", 27" or 32"
- Locks
- Cold pan drain
- 230V/50 cycle*

* Inclusion of this option will alter the electrical specifications


F18MR




**Plan View
F18MR31A**




**Elevation View
F18MR31A**

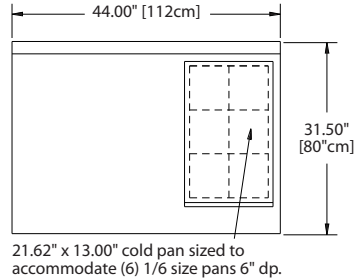


**Plan View
F18MR44A**

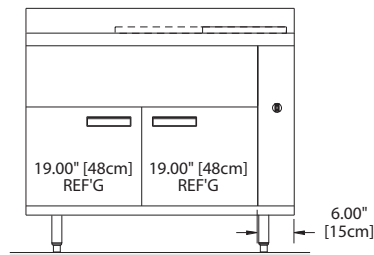


**Elevation View
F18MR44A, F18MR44D**

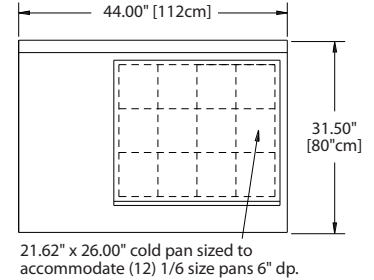


**Plan View
F18MR44D**

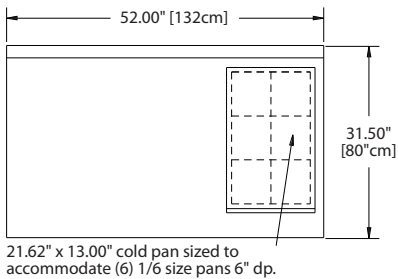


**Plan View
F18MR52A**

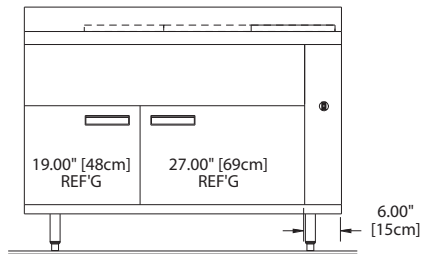


**Elevation View
F18MR52A, F18MR52D, F18MR52E**

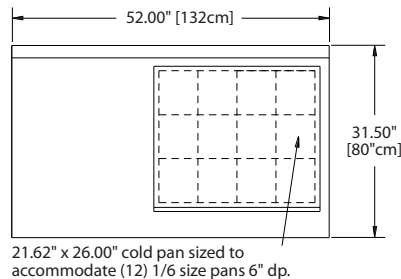

**Plan View
F18MR52D**

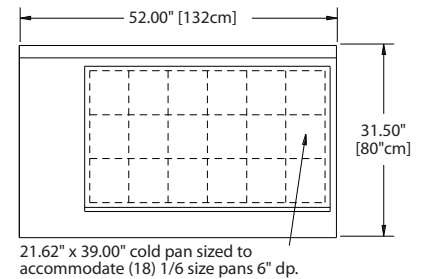


**Plan View
F18MR52E**

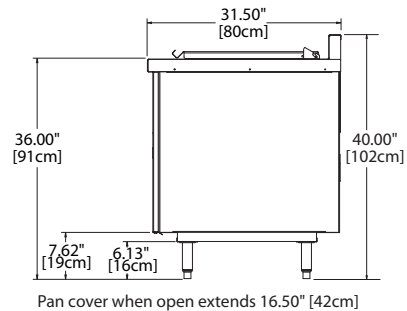

**End View
All Models**


Mechanical Data

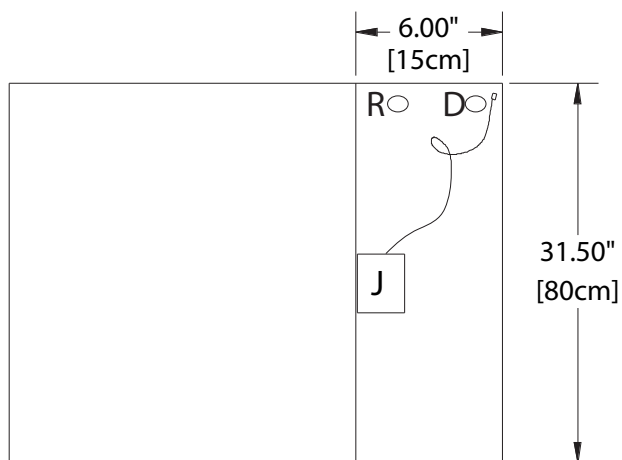

**Plan View
All Models**

J = Junction box
R = Refrigeration lines, 1/4" liquid, 3/8" suction
D = Drains 1/2"

Door Swing

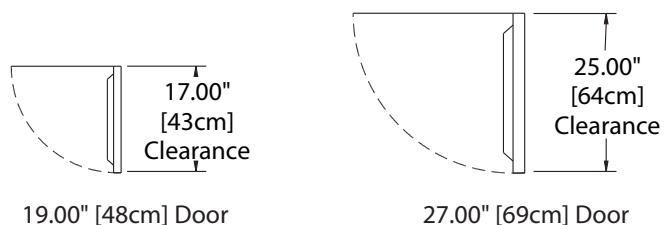

F18MR

Specifications

Model	Number Of Doors	Number Of Pans	Storage ft ³	H.P.	V/Hz/Ph	Amps	Ship Weight lbs/kg	BTU Design Base/Rail	BTU Sys. Cap. Base/Rail
F18MR31A	(1) 19"	6	4.11	1/4*	115/60/1	3.0	350/159	280/265	120/12
F18MR44A	(2) 19"	6	6.94	1/4*	115/60/1	3.0	390/177	444/265	120/12
F18MR44D	(2) 19"	12	6.94	1/4*	115/60/1	3.0	380/172	444/529	120/22
F18MR52A	19" & 27"	6	8.69	1/3*	115/60/1	3.0	440/199	515/265	120/12
F18MR52D	19" & 27"	12	8.69	1/3*	115/60/1	3.0	430/195	515/529	120/22
F18MR52E	19" & 27"	18	8.69	1/3*	115/60/1	3.0	420/190	515/794	120/31

*Recommended horsepower, compressor not supplied on remote units

Delfield reserves the right to make changes to the design or specifications without prior notice.



F18MR

31.5" (80cm) Deep Remote Mega Top Salad Tables

Specifications

Exterior Top is constructed of one piece 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing on front and 4" (10.2cm) high by 2" (5.1cm) thick backsplash on rear. Top has opening for use with 1/6 size pans. Pans and adapter bars supplied by others. Pans are recessed 3" (7.6cm) or 2" (5.1cm) and rest on pan supports. Opening is supplied with removable 20-gauge stainless steel hinged cover. Temperature in top opening maintains 33°F (1°C) to 41°F (5°C), with pans recessed 3" (7.6cm), at 86°F ambient room temperature, meeting NSF7 requirements.

Exterior back and bottom of base are constructed of 24-gauge galvanized steel. Exterior ends are constructed of 18-gauge stainless steel.

Base interior has a 22-gauge stainless steel back and bottom. Interior ends and door frames are formed of ABS plastic. Base is insulated with a minimum of 1.50" (3.8cm) high density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) foamed in place polyurethane.

Door(s) are constructed with ABS plastic interior liner and 22-gauge stainless steel exterior front. Door(s) have a black recessed handle and a snap in magnetic gasket which is easily replaceable.

Base is furnished with a blower coil especially made to fit behind door mullion. Blower coil housing encloses refrigeration lines, evaporator coil, expansion valve and fans. Unit is designed to maintain 36°F (2°C) to 40°F (4°C) in the base.

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

Electrical connections are 115 volt, 60 Hertz, single phase. Unit must be hard wired.

Refrigeration System Component - HFC-404A.

