




F18FR

31.50" (80cm) Deep Remote Freezer Base Work Tables

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- F18FR35 - 35" remote freezer work table
- F18FR50 - 50" remote freezer work table
- F18FR58 - 58" remote freezer work table
- F18FR66 - 66" remote freezer work table
- F18FR76 - 76" remote freezer work table

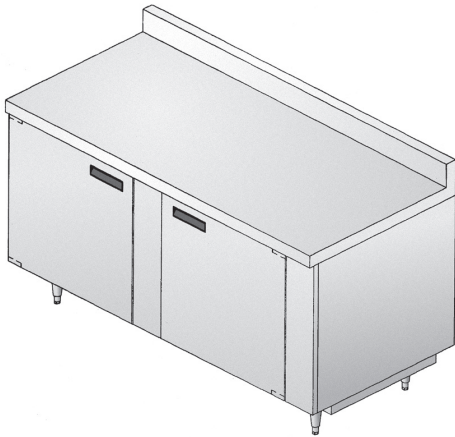

F18FR66

Standard Features

- Standard heavy duty units have unfinished ends
- 16-gauge stainless steel top construction
- Interior sub-top is made of stainless steel
- 2BF stainless steel refrigerated base interior back and bottom
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation
- Freezer base fronts are made of .095" thick ABS plastic backed by rigid polyurethane water blown injection molded frames. (NO WOOD)
- One epoxy coated shelf for each door
- Exterior drawer fronts are stainless steel with ABS plastic liner
- Snap-in dart style vinyl magnetic gasket
- Recessed black plastic handles held in with a positive lock system
- 14-gauge leg rails that run the entire length
- 6.12" adjustable stainless steel legs and bullet feet
- Environmentally friendly HFC-404A refrigerant
- Interior cabinet is cooled with mullion style evaporator blower coils (coated) mounted

between each door/drawer section for very even air and temperature control

- Interior freezer base cabinet will maintain 0° to -5° temperatures at 100° ambient room temperature. Supplied standard with defrost timer
- One year parts and 90 day labor standard warranty

Options & Accessories

- Electric condensate evaporators
- Stainless steel end or back
- Laminate facing (full front)
- Laminate end or back
- Cutting board
- Condensate evaporator (1 per coil)
- Tray rack
- Drawers in lieu of one door, 19", 27" or 32"
- Locks
- 230V/50 cycle*
- * Inclusion of this option will alter the electrical specifications

Specifications

Exterior Top to be constructed of one piece 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing on front and 4" (10.2cm) high by 2" (5.1cm) thick backsplash on rear. Top to be insulated with 2" (5.1cm) high density insulation.

Base interior to have 22-gauge stainless steel back and bottom. Interior ends and door frames to be thermoformed ABS plastic. Base to be insulated with 1.50" (3.8cm) high density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) foamed in place polyurethane.

Exterior back and bottom of base to be 24-gauge galvanized steel. Exterior ends to be constructed of 18-gauge galvanized steel.

Door(s) have a thermoformed ABS plastic interior liner and 22 gauge stainless steel exterior front. Door(s) have black recessed handle(s) and a snap-in magnetic gasket which is easily replaceable. Unit to be furnished with (1) epoxy coated wire shelf for each door section.

Base to be furnished with blower coil with coil housing to enclose expansion valve and fans. Unit is provided with defrost


timer, thermostat and solenoid valve in mechanical section. Unit is designed to maintain 0°F (-18°C) to -5°F (21°C).

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

Recommended refrigerant - HFC-404A

Electrical connections are 115 volt, 60 Hertz, single phase. Unit must be hard wired.



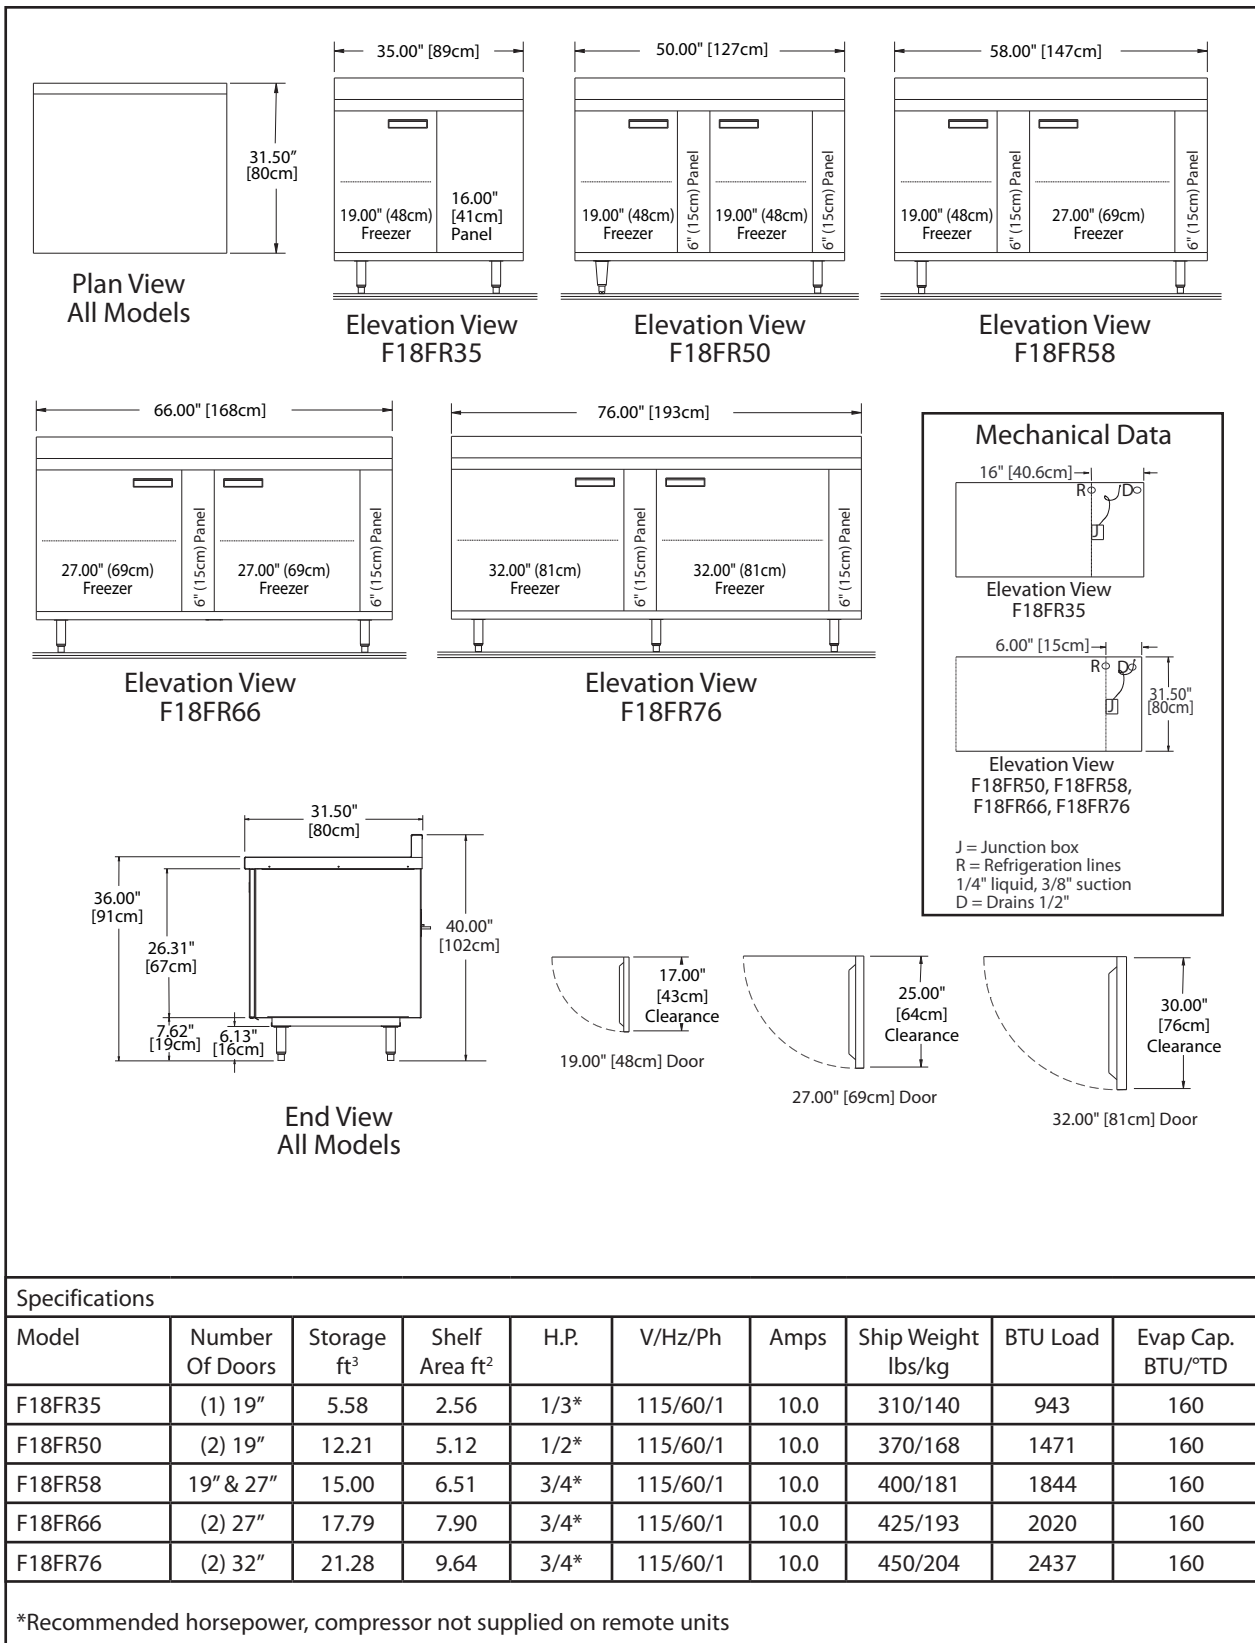

Delfield reserves the right to make changes to the design or specifications without prior notice.