



# F18FC

31.5" (80cm) Deep Self-Contained Freezer Base Work Tables


Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

F18FC:

31.5" (80cm) Deep Self-Contained Freezer Base Work Tables

## Models

- F18FC43 43" freezer work table
- F18FC62 62" freezer work table
- F18FC70 70" freezer work table
- F18FC78 78" freezer work table
- F18FC88 88" freezer work table

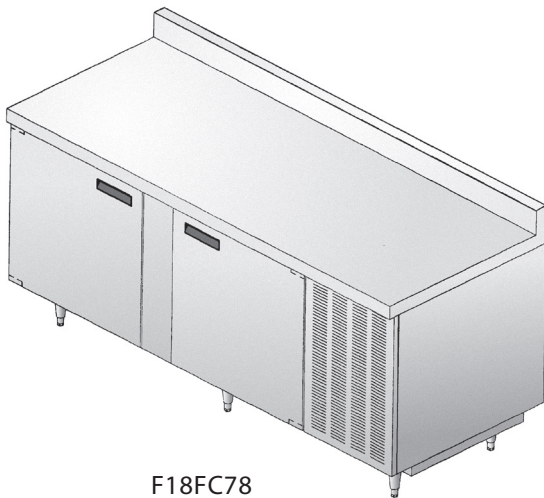

F18FC78

## Standard Features


- Standard heavy duty units have unfinished ends
- Heavy duty stainless steel top construction
- Stainless steel refrigerated base interior back and bottom
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation keeps energy costs low
- Base fronts are made of ABS plastic backed by rigid polyurethane injection molded frames
- One epoxy coated shelf for each door
- Snap-in dart style vinyl magnetic gasket
- Recessed black plastic handles held in with a positive lock system
- Heavy duty leg rails that run the entire length of

- the unit
- 6.12" adjustable full stainless steel legs and bullet feet
- 8' cord and plug supplied
- 36" standard work height
- Environmentally friendly HFC-404A refrigerant
- Hot gas defrost evaporators are standard
- Interior cabinet is cooled with mullion style evaporator blower coils (coated) mounted between each door/drawer section for very even air and temperature control
- Interior freezer base cabinet will maintain 0° to -5° temperatures at 100° ambient room temperature meeting NSF requirements. Defrost is controlled by the electronic thermostat
- One year parts and 90 day labor standard warranty.


## Options & Accessories

- Stainless steel end
- Stainless steel back
- Laminate facing (full front)
- Laminate end
- Laminate back
- Cutting board
- Tray rack
- Drawers in lieu of one door
- Locks
- Casters
- 220V/50 cycle\*
- \* Inclusion of this option will alter the electrical specifications of the unit


# F18FC




Plan View  
F18FC43

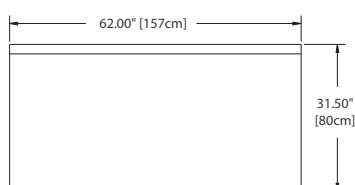


Plan View  
F18FC62

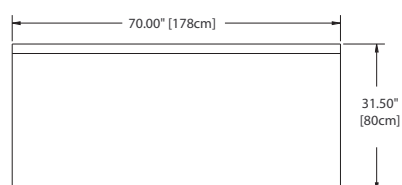


Plan View  
F18FC70




Elevation View  
F18FC43

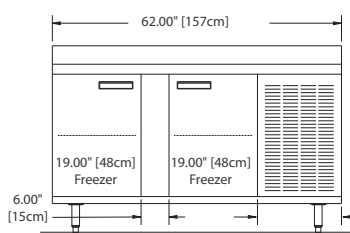


Elevation View  
F18FC62

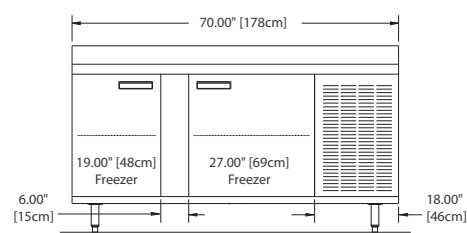


Elevation View  
F18FC70

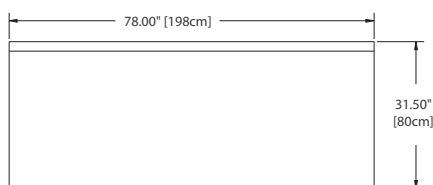


Plan View  
F18FC78

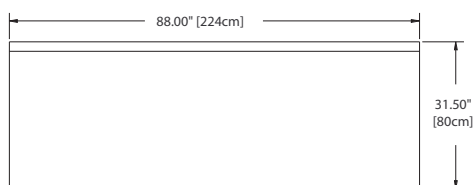


Plan View  
F18FC88

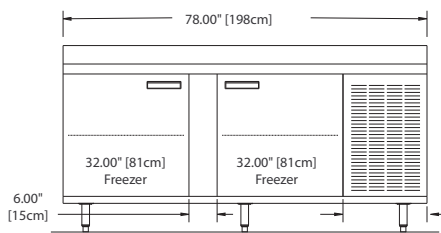

Elevation View  
F18FC78

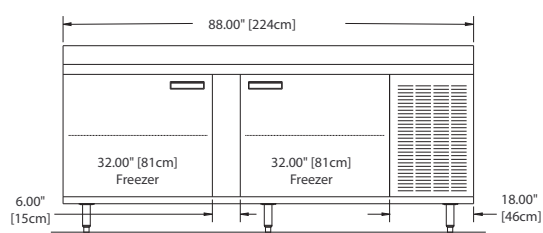


Elevation View  
F18FC88

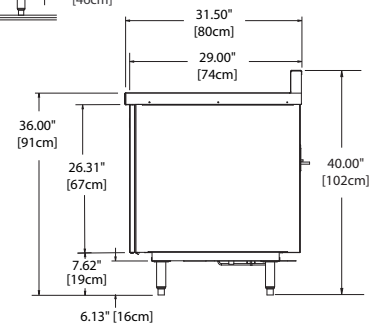


End View  
All Models

NOTE: Unobstructed airflow must be maintained to insure unit performance and maintain warranty.

## Mechanical Data

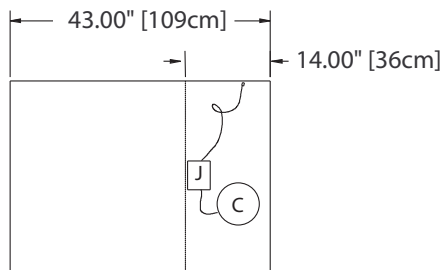

Plan View  
F18FC43

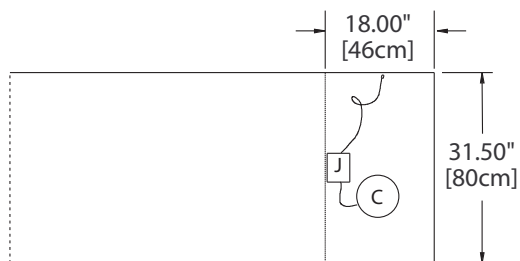


Plan View  
F18FC62, F18FC70, F18FC78, F18FC88


C = Condensing Unit

J = Junction Box w/8ft (2.4m) Cord & Plug


## Door Swing



19.00" [48cm] Door



27.00" [69cm] Door



32.00" [81cm] Door

## F18FC

Model	Number Of Doors	Volume Ft <sup>3</sup>	Shelf Area Ft <sup>2</sup>	BTU Load	BTU System	H.P.	V/Hz/Ph	Amps	Ship Weight Lbs/Kg	Energy KWH/Day
F18FC43	(1) 19"	5.58	2.56	943	1558	1/3	115/60/1	10.0	425/193	3.18
F18FC62	(2) 19"	12.21	5.12	1471	1776	1/2	115/60/1	12.0	495/225	5.02
F18FC70	19" & 27"	15.00	6.51	1647	2713	3/4	115/60/1	16.0	575/261	5.73
F18FC78	(2) 27"	17.79	7.90	1824	2713	3/4	115/60/1	16.0	645/292	6.5
F18FC88	(2) 32"	21.28	9.64	2045	2713	3/4	115/60/1	16.0	715/324	7.67

Delfield reserves the right to make changes to the design or specifications without prior notice.



# F18FC

31.5" (80cm) Deep Self-Contained Freezer Base Work Tables

## Specifications

**Exterior Top** is constructed of one piece stainless steel, with integral 2.12" (5cm) square nosing on front and 4.00" (10cm) high by 2.00" (5cm) thick backsplash on rear. Top is insulated with 2.00" (5cm) high density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.

**Base interior** has a stainless steel back and bottom. Interior ends and door frames to be thermoformed ABS plastic. Base is insulated with 1.50" (4cm) high density foamed in place polyurethane.

**Exterior back** and bottom of base is constructed of galvanized steel. Exterior ends are constructed of galvanized steel.

**Door(s)** have a thermoformed plastic ABS plastic interior liner and stainless steel exterior front. Door(s) have black recessed handle(s) and a snap-in magnetic gasket which is easily replaceable. Unit is furnished with (1) epoxy coated wire shelf for each door section.

**Base** has a machine compartment, standard on the right, with condensing unit and electrical junction box installed. Machine compartment has a removable louver for access to condensing unit. Blower coil(s) are located behind the door mullions.

**Refrigeration system** uses HFC-404A refrigerant and maintains 0°F (-18°C) to -5°F (-21°C).

Unit is mounted on 6.13" (16cm) high adjustable stainless steel legs.

**Electrical connections** are 115 volts, 60 hertz, single phase. Unit has an 8' (2.4m) long cord and plug.



Only Models  
F18FC43, F18FC70  
F18FC78, F18FC88