

SCM

Mobile Milk Counters

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

SCM: Mobile Milk Counters

Models

- SCM-36 126 milk carton capacity, 1 lid milk counter
- SCM-50 252 milk carton capacity, 2 lid milk counter
- SCM-60 378 milk carton capacity, 3 lid milk counter
- SCM-74 504 milk carton capacity, 4 lid milk counter

*Milk capacities are based on half pint, 2.75" x 2.75" gable top cartons



SCM-50

Standard Features

- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- 14-gauge stainless steel top
- Top has die stamped opening(s) and is provided with hinged stainless steel removable lid(s)
- Watertight inner liner has radius corners for easy cleaning
- Equipped with a drain plumbed to a drain valve
- Refrigerated compartment is equipped with automatic self-leveling, field adjustable elevators
- Divider trays are supplied
- 10' cord and plug standard
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- Standard on 5" polyurethane swivel casters
- Easy to use stainless steel interlock system is standard on base and tray slides
- HFC-134A refrigerant is standard
- Environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming

Potential) polyurethane insulation keeps energy costs low

- One year parts and 90 day labor standard warranty

Options & Accessories

- 12" (30cm) wide stainless steel fold-down tray slide
- 10" (25cm) wide three-bar fold-down tray slide
- 10" (25cm) wide stainless steel fold-down work shelf
- Line-up interlock device
- 10" x 17" x 4" (25cm x 43cm x 10cm) deep chrome wire baskets
- Stainless steel lid locking device with keyed lock
- Stainless steel trim strips
- 14" x 30" (36cm x 76cm) stainless steel end drop shelf
- 6" (15cm) high adjustable stainless steel legs in lieu of casters
- Laminate exterior panels in lieu of stainless steel exterior panels

Specifications

Exterior body is constructed of 18-gauge stainless steel side panels and 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with 14-gauge galvanized channel supports.


Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners. Top has one (SCM-36), two (SCM-50), three (SCM-60) or four (SCM-74) die-stamped openings and is provided with hinged removable lids. Lids are constructed of stainless steel and have a rubber gasket seal.

Refrigerated Compartment: have water-tight inner liner constructed of 22-gauge stainless steel, with radius corners and 1.5" (4cm) of polyurethane environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) insulation. Compartment is equipped with a drain plumbed to a drain valve located in the bottom of the unit. Refrigerated compartment is equipped with automatic self leveling, field adjustable elevators. Divider trays are supplied.


Refrigeration: copper refrigeration coils are attached to outside of inner liner. Unit is refrigerated by self-contained, 115 volt, 60 Hertz, single phase hermetically sealed condensing unit with pressure control. Unit is wired with a 3-wire, grounded, maximum 10' (3m) 120 volt cord and plug. Refrigeration system use HFC-134a refrigerant.

Casters: unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyurethane tires and plate brakes. Overall height of caster assembly is 6" (15cm).







Plan View
SCM-36




Elevation View
SCM-36




Plan View
SCM-50




Elevation View
SCM-50

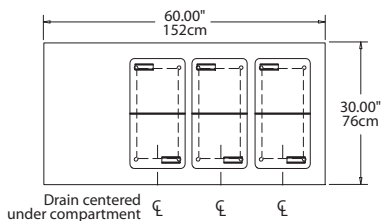


Plan View
SCM-60




Elevation View
SCM-60

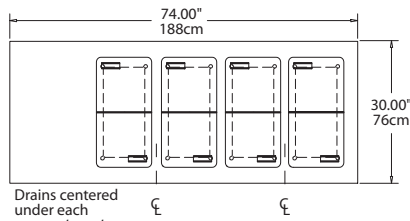

Plan View
SCM-74

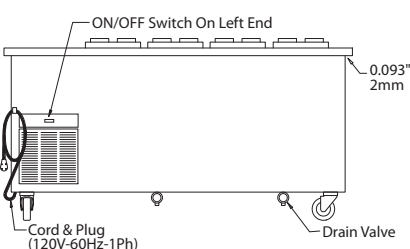

Elevation View
SCM-74



End View
All Models

Specifications

Model	Milk Capacity*	H.P.	V/Hz/Ph	Amps	Nema Plug	Ship Weight
SCM-36	126	1/4	120/60/1	5.0	5-15P	400lbs/181kg
SCM-50	252	1/4	120/60/1	5.0	5-15P	450lbs/204kg
SCM-60	378	1/4	120/60/1	5.0	5-15P	500lbs/227kg
SCM-74	504	1/3	120/60/1	6.0	5-15P	550lbs/250kg

*Based on 0.5 pint (237ml), 2.75" x 2.75" (7cm x 7cm) gable top cartons.

Delfield reserves the right to make changes to the design or specifications without prior notice.