

SE-H/SES-H

Mobile Heated Serving Counters

Short Form Specifications

Exterior Body: Open frame construction with 16-gauge stainless steel corners: 18-gauge stainless steel full bottom shelf and stainless steel C channel front and sides for optional accent panels.


Exterior Top: Constructed of 16-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

Heated Food Warmers: Constructed of die-stamped stainless steel. Heated food warmers are insulated on bottom. Each heated food warmer is individually equipped with a heated element rated at 1000 watts for 120 volt or 208/230 volt, 60 hertz, single phase service and wired to an adjustable control switch and indicator light in the control panel. Heated food warmers are interwired to a maximum 10' (3m) long cord with a grounded plug for 120 volt or 208/230 volt, 60 hertz, single phase electrical service. Unit is equipped with a drain, manifold and gate valve with garden hose hookup.

Casters: Units are mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).

Optional Accessories and Modifications

SE-A	10" stainless steel fold-down tray slide
SE-D	8" polyethylene fold-down cutting board
SE-E	8" stainless steel fold-down work shelf
SE-F	Interlock device
SE-GF	Counter protector with full Plexiglas front
SE-HF	Two tier display with full Plexiglas front on each tier
SE-GS	Counter protector with short Plexiglas front (for self service)
SE-HS	Two tier display with short Plexiglas front on each tier (for self service)
SE-KS	Single service buffet shield
SE-KD	Double service buffet shield
SE-GD	Single tier dual display with sneeze guards
SE-HD	Double tier dual display with sneeze guards
SE-J	10" stainless steel overshelf
SE-J2	Two-tier 10" stainless steel overshelf
SE-LI	Light fixture (per tier)
SE-M	Radiant heat lamp with on/off switch
SE-Q	115/15A outlet
SE-U	14"x29" stainless steel end drop shelf
SE-V	Adjustable stainless steel leg
SE-SL	Sliding doors

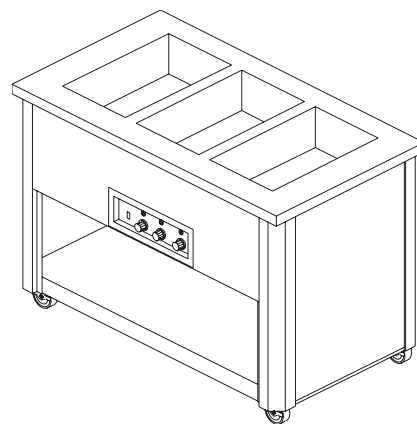


SE-H3




SE-H/SES-H


Mobile Heated Serving Counters

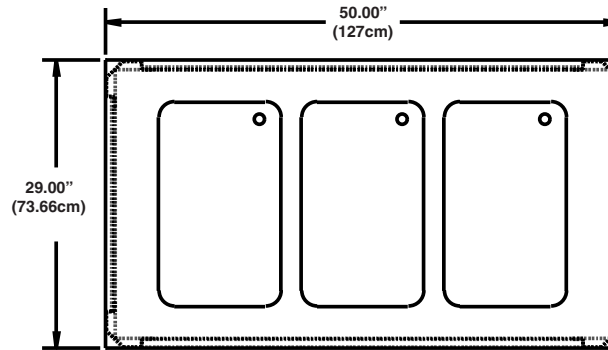

PLAN VIEW

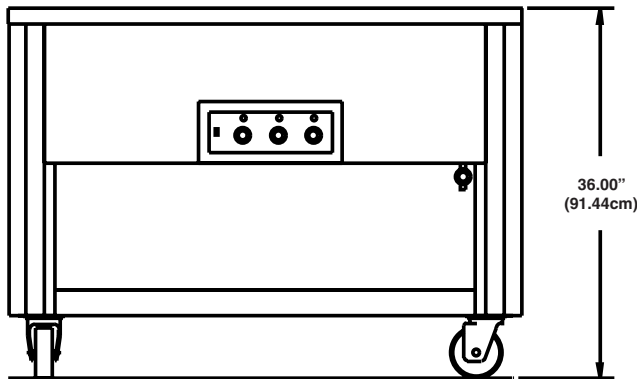

ELEVATION VIEW

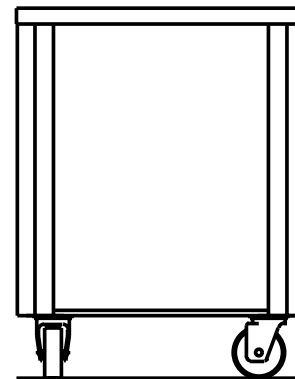

END VIEW

Mechanical Data - Standard Unit

MODEL NUMBER	Description	L	D	H	NEMA PLUG	VOLTS	AMP	SHIP WT	FRT. CLASS
Heated Counters									
SE-H2	2 food wells	39"	29"	36"	14-20P	120/208-230	10.0/11.0	215	100
SE-H3	3 food wells	50"	29"	36"	14-20P	120/208-230	15.0/16.0	265	100
SE-H4	4 food wells	64"	29"	36"	14-30P	120/208-230	20.0/22.0	320	100
SE-H5	5 food wells	78"	29"	36"	14-50P	120/208-230	24.0/27.0	410	100
SE-H6	6 food wells	92"	29"	36"	14-50P	120/208-230	29.0/32.0	500	100

Add S for 30" high models. (example SES-H)



The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com

Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.

DSSEH 02/04