

# KHC-NU

Mobile Hot and Cold Combination Counters

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

## Models

- |              |                                      |              |  |
|--------------|--------------------------------------|--------------|--|
| • KHC-50-NU  | One hot well, 26" x 21.62" cold pan  | • KHC-96-NU  | One hot well, 65" x 21.62" cold pan    |
| • KHC-60-NU  | One hot well, 26" x 21.62" cold pan  | • KH2C-96-NU | Two hot wells, 52" x 21.62" cold pan   |
| • KHC-74-NU  | One hot well, 39" x 21.62" cold pan  | • KH3C-96-NU | Three hot wells, 39" x 21.62" cold pan |
| • KH2C-74-NU | Two hot wells, 26" x 21.62" cold pan | • KH4C-96-NU | Four hot wells, 26" x 21.62" cold pan  |



**KH2C-74-NU**  
shown with option fold-down tray slide, fold-down work shelf and flip-up sneezeguard

## Standard Features

- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- 14-gauge tops
- Standard on 5" polyurethane swivel casters
- Easy to use stainless steel interlock system is standard on base and tray slides
- A maximum 10' long cord and plug
- Enclosed bases
- Top has one to four electrically heated, recessed die-stamped stainless steel hot food warmers.
- Each warmer accommodates a 12" x 20" x 6" pan (pans supplied by others)
- All body cutouts reinforced with 14-gauge channel supports
- Insulated ice pan is 7" deep and constructed of 22-gauge stainless steel. Perforated false bottom, and drain with valve is standard
- Environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation keeps energy costs

low

- One year parts and 90 day labor standard warranty

## Options & Accessories

- Tray slides and work shelf shelves
  - Line-up interlock device
  - Food shields
  - 12" (30.5cm) wide 18-gauge stainless steel overself
  - Incandescent light fixtures\*
  - Radiant or bullet style heat lamps\*
  - Open understorage with shelf
  - 120V/60Hz/1Ø, 10 amp convenience outlet with breaker\*
  - Drains from food wells, plumbed to common valve
  - Molded fiberglass trim strips
  - 6" (15cm) high adjustable stainless steel legs in lieu of casters
- \* Inclusion of these options will alter the electrical specifications of unit

## Specifications

**Exterior Body** is seamless, one-piece molded fiberglass, having perfectly smooth exterior surface with all corners fully rounded. The fiberglass reinforced polyester (F.R.P.) is molded with permanent color. Stress points are internally reinforced.


**Exterior top** is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners. Top has one to four electrically heated, recessed, die-stamped stainless steel hot food warmers. Each warmer accommodates one 12.75" x 20.75" x 6" (32cm x 53cm x 15cm) pan.

**Heated food warmers** are constructed of die-stamped stainless steel. Each Heated food warmer is individually equipped with a heated element rated at 1000 watts for 120 volt or 208/230 volt, 60 hertz, single phase service and wired to an adjustable control switch and indicator light in the control panel. Heated food warmers are interwired to a 3 or 4-wire, grounded plug for 120 volt or 208/230 volt, 60 hertz, single phase electrical service. The maximum cord length is 10'. Unit has on/off switch mounted on the exterior.


**Insulated ice pan** is 7" (18cm) deep and constructed of 22-gauge stainless steel. A removable, perforated false bottom 1" (2.5cm) high, constructed of stainless steel is supplied. The ice pan is separated from the exterior top by a concealed breaker strip and fully insulated with foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation. Ice pan is equipped with a drain valve located at the bottom of the unit.

**Casters:** Unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyurethane tires and plate brakes. Overall height of caster assembly is 6.00" (15cm).




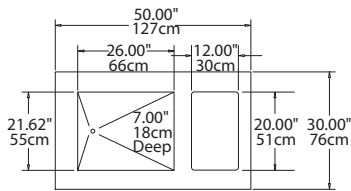


Plan View KHC-50-NU

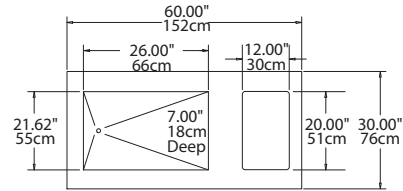


Plan View KHC-60-NU

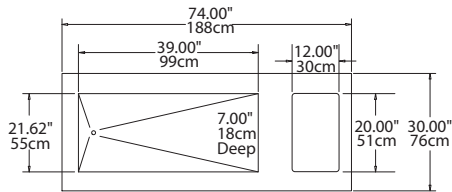


Plan View KHC-74-NU

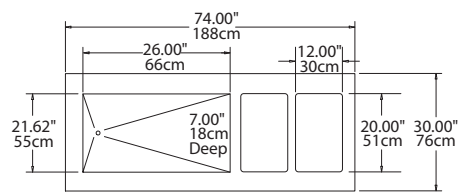


Plan View KH2C-74-NU

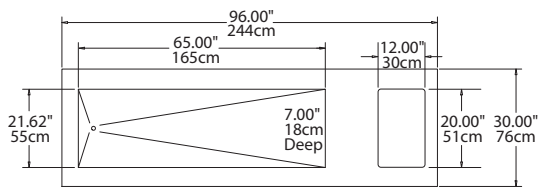


Plan View KHC-96-NU

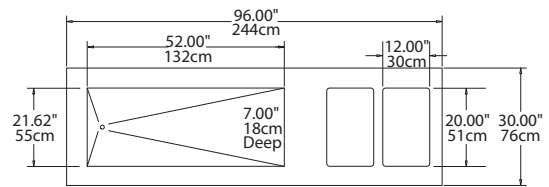


Plan View KH2C-96-NU

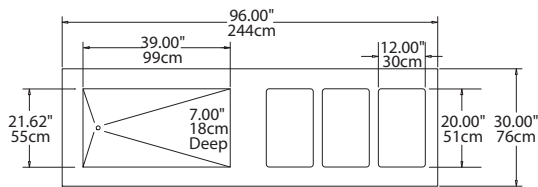


Plan View KH3C-96-NU

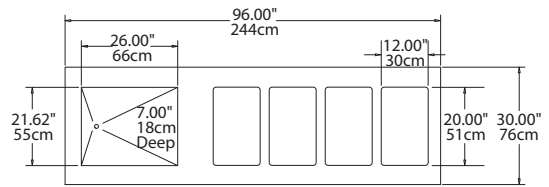

Plan View KH42C-96-NU

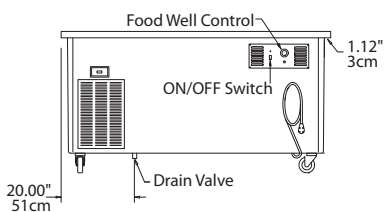

Typical Elevation View  
All Models



Right End View  
All Models

#### Specifications

Model	V/60Hz/1Ph	Amp	NEMA Plug	Ship Weight (LBS/KG)	Model	V/60Hz/1Ph	Amp	NEMA Plug	Ship Weight (LBS/KG)
KHC-50-NU	120	9.0	5-15P	300/136	KH2C-74-NU	120/208-230	11.0	14-20P	410/186
KHC-60-NU	120	9.0	5-15P	350/159	KH2C-96-NU	120/208-230	11.0	14-20P	430/195
KHC-74-NU	120	9.0	5-15P	400/181	KH3C-96-NU	120/208-230	16.0	14-20P	450/204
KHC-96-NU	120	9.0	5-15P	425/193	KH4C-96-NU	120/208-230	22.0	14-30P	460/209

Delfield reserves the right to make changes to the design or specifications without prior notice.