

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

SmartHold® Holding cabinet

MODEL **HHC-993** half-size
HHC-992 stacked



HHC-993 *SmartHold* holding cabinet with recessed water pan, 5-inch (127 mm) casters. Holds 5 full-size sheet pans.



Stacked version HHC-992 from two HHC-993s. Stacked unit is completely assembled at the factory.

General Information

Henny Penny *SmartHold*® humidified holding cabinets are designed to hold a wide range of foods within ideal temperature and humidity conditions for long periods of time prior to serving.

The *SmartHold* patented automatic humidity control system links water pan heat, fans and ventilation in a closed loop control that lets foodservice operators measure and maintain precise humidity levels in one-percent increments from 10 to 90% relative humidity.

This extraordinary humidity control means you can hold practically any type of food for exceptionally long periods of time without sacrificing freshness or presentation. That translates into higher food quality and less waste throughout the day.

The *SmartHold* holding cabinets also improve your equipment and labor utilization. With longer holding

periods, operators can cook in quantity before peak periods and stock heated display cases directly from the holding cabinet. Some items, such as slow-cooked ribs, can be held overnight, a process that actually improves the flavor and further tenderizes the meat.

SmartHold humidified holding cabinets also feature a Proofing Mode with lower holding temperatures of 80-140°F (27-60°C). By proofing and holding in the same cabinet, you can use the HHC-993 all day long and eliminate the need for a separate proofing cabinet.

The HHC-993 is a half-size humidified holding cabinet designed for precise holding in lower volume operations. It can be stacked as the HHC-992 to double your capacity in the same footprint with the versatility of two entirely separate holding environments and control sets.

Standard Features

- Durable, high-quality stainless steel construction, interior and exterior.
- Patented closed loop humidity control:
 - Maintain any humidity level between 10 and 90% RH.
 - Exclusive automatic venting.
 - Self-diagnostic for vent motor, temperature sensor and water pan heater operation.
 - Easy to clean and service.
- 5 programmable count down timers with single switch start/stop/abort, manual override and power-out memory.
- Constant digital humidity/temperature display.
- Separate humidity/temperature set points.
- Low water warning light.
- Sound alert signal.
- Food probe temperature display.
- Large 3-gallon (11.4 liters) stainless steel recessed heated water pan.
- Proofing mode.
- Quick-response humidity generation.
- Fully insulated doors, sidewalls and control module.
- Full perimeter door gasket.
- Self-closing, lift-off doors stay open past 90 degrees.
- Magnetic door latch and heavy-duty plated hinges.
- Standard 5 in. (127 mm) casters, two locking.
- Optional hose drain connection.

Please specify desired configuration


- Unit
- HHC-993
 - HHC-992 Stacked
- Door hinge
- Right OR Left
- Style
- Pass-through OR solid back

<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED	<input type="checkbox"/> RESUBMIT
AUTHORIZED SIGNATURE		DATE



SmartHold® holding cabinet

MODEL **HHC-993** half-size
HHC-992 stacked

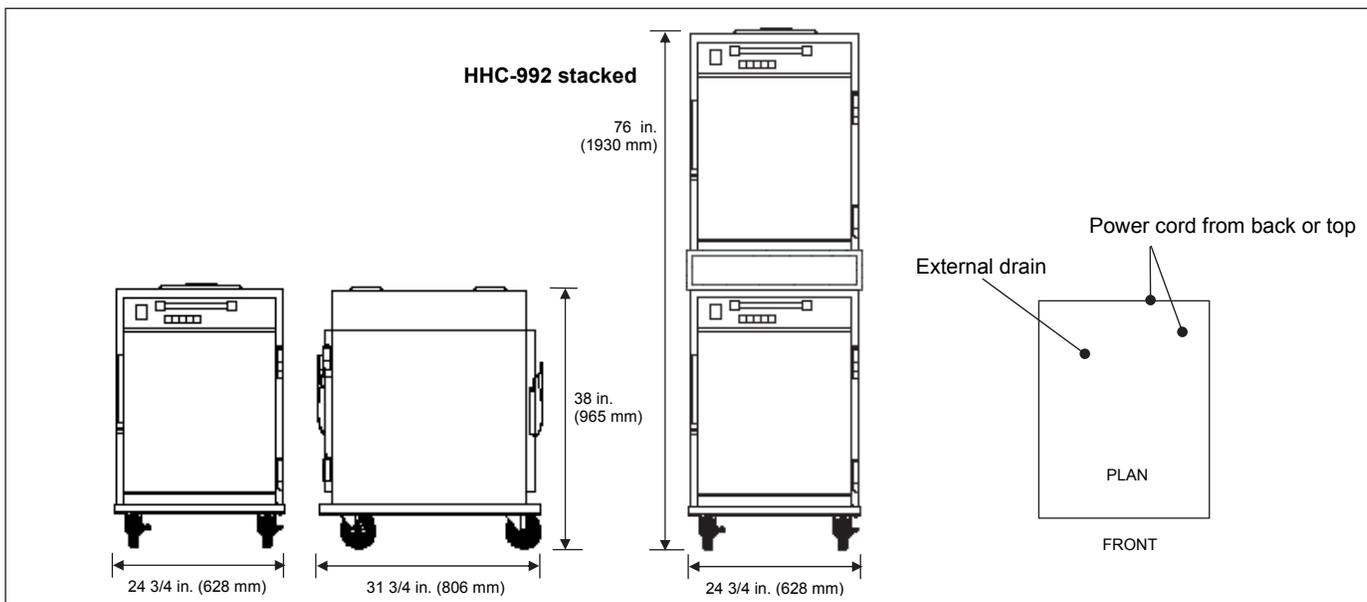

Dimensions

	HHC-993	HHC-992 Stacked
Height:	38 in. (965 mm)	76 in. (1930 mm)
Width:	24 3/4 in. (628 mm)	24 3/4 in. (628 mm)
Depth:	31 3/4 in. (806 mm)	31 3/4 in. (806 mm)

Required clearances: N/A

Crated dimensions

	HHC-993	HHC-992 Stacked
Length:	39 1/2 in. (1000 mm)	81 in. (2060 mm)
Depth:	35 1/2 in. (900 mm)	35 1/2 in. (900 mm)
Height:	31 in. (790 mm)	34 3/4 in. (880 mm)
Volume:	25 cu. ft. (0.71 m ³)	58 cu. ft. (1.58 m ³)

Crated weight

HHC-993 Half-size: 220 lbs. (100 kg)
HHC-992 Stacked: 493 lbs. (224 kg)

Water connections

3 gallon (11.4 liters) water pan, 2 gallons (7.6 liters) for operational use.
External drain connection.

Heating

Proofing mode: 80-140°F (27-60°C)
Normal holding: 160-210°F (71-99°C)

Humidity: OFF/ON 10-90% RH

Pan capacity

Accepts standard sheet pans 18 x 26 in. (457 x 660 mm).
HHC-993 Half-size: 5 shelf runners
HHC-992 Stacked: 10 shelf runners.

Electrical

NOTE: Each cabinet in the HHC-992 operates independently.
Electrical specifications apply per cabinet.

Voltage	Phase	Cycle/Hz	Watts	Amps	Wire	Optional power cord and plug supplied for USA and Canada, only. Plug type:						
100	1	50/60	1668	16.7	2+G							
120	1	60	2080	17.3	2+G							
208	1	60	2080	10.0	2+G							
220-240	1	50/60	1992	8.3	1NG							
240	1	60	2076	8.7	2+G							
						<table border="1"> <thead> <tr> <th>NEMA 5-20P</th> <th>NEMA 5-30P</th> <th>NEMA 6-15P</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	NEMA 5-20P	NEMA 5-30P	NEMA 6-15P			
NEMA 5-20P	NEMA 5-30P	NEMA 6-15P										

Laboratory certifications



Bidding Specifications

- Provide Henny Penny Model HHC-993 half-size SmartHold Humidified Holding Cabinet. Unit is designed to provide ideal environment for safely holding a wide variety of hot foods in quality condition for very long periods of time.
- Unit features a patented closed loop control system to regulate precise temperatures and humidity levels.
- Unit shall have Proofing Mode, a lower temperature range setting.
- Unit is 300 grade stainless steel construction throughout.
- Unit shall have digital display controls with 5 count down timers (10 for HHC-902 stacked.)
- Unit shall be equipped with 5 shelf runners (10 for HHC-902 stacked.)
- Provide choice of right or left-hand door, solid back or pass-through design.
- When ordering stacked (HHC-992) each cabinet must be configured the same.
- Unit shall include recessed 3 gal. (11.4 liters) stainless steel water pan.
- Unit features full perimeter door gasket and fully insulated sidewalls and control module.
- Unit comes with 4 casters, 5 in. (127 mm) two are locking. One set of casters comes with HHC-992 stacked.

Continuing product improvement may subject specifications to change without notice.

Henny Penny Corporation
PO Box 60 Eaton OH 45320 USA
+1 937 456.8400 800 417.8417
+1 937 456.8434 Fax 800 417.8434 Fax
www.hennypenny.com

HENNY PENNY