

SECTION 3 - OPERATION

3-1. INTRODUCTION

This section provides operating procedures for the HC-941. Sections 1, 2, and 3 should be read and all instructions should be followed before operating the cabinet.

This section contains an explanation of all controls, components, and information on operating procedures and daily maintenance.

3-2. OPERATING CONTROLS AND COMPONENTS

Figures 3-1 through 3-6 identify and describe the functions of all the operating controls and components of the cabinet.

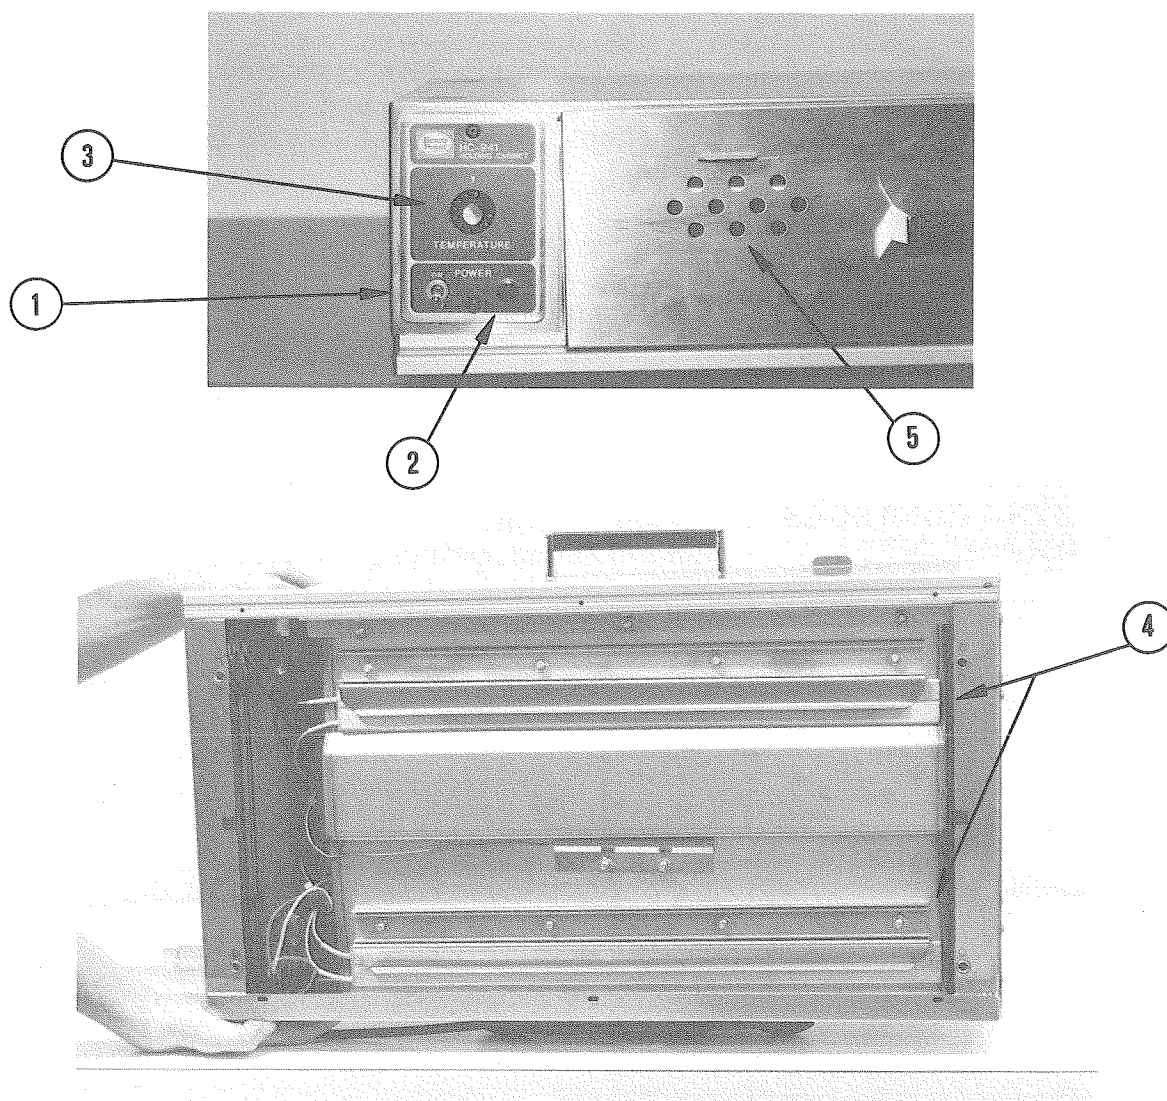


Fig. No.	Item No.	Description	Function
3-1	1	Power Switch	The power switch is a toggle switch that switches electrical current to the unit.
3-1	2	Power Light	When illuminated the power light indicates that the power switch is in the "on" position and the components are energized.
3-1	3	Thermostat Control	The thermostat is an electro-mechanical device which controls the temperature inside the cabinet.
3-2	4	Heater	The heaters are a sheath type heater that are rated at 240 watts per heater.
3-1	5	Vent Control	The vent controls the amount of humidity inside of the cabinet. For more humidity, close vent; for less humidity, open vent.
3-3	6	Appliance Receptacle	Appliance receptacle allows for hookup of additional appliances. (on rear of unit)



3-3 START UP**NOTE**

Before using the HC-941 unit, it should be thoroughly cleaned as described in the "cleaning procedures" section of this manual. To put the HC-941 into operation, move the power switch to the on position and adjust the thermostat to the appropriate setting. The power light should illuminate indicating the the unit is operating. The operating temperature of this unit should be achieved in approximately 30 minutes.

3-4 OPERATION WITH PRODUCT

1. Place the hot product inside of the drawers.
2. Serve the product first that has been in the cabinet the longest.
3. Open drawers only as necessary to load and serve the product.

3-5 CLEANING

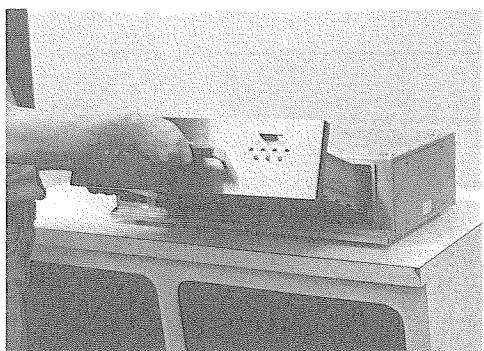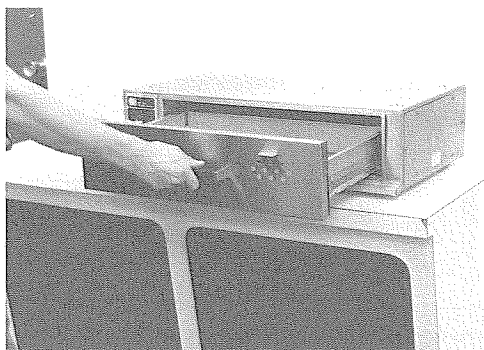

1. Move the power switch to the off position.
2. Disconnect the electrical supply to the unit.

WARNING

Allow the unit to cool before cleaning by opening the drawer fully for approximately 20 minutes as the interior of the cabinet may be hot enough to burn.

3. Remove the drawer by pulling straight out and tilting up.

CAUTION

Be sure that the inner drawer has cooled down sufficiently before removing.

Due to the weight of the drawer use both hands in the removal of the drawer.

4. Clean the drawer with a cloth and soapy water.
5. Clean the interior of the cabinet thoroughly with a cloth and soapy water.

CAUTION

Do not use abrasive cleaners.

6. Wipe down the exterior of the cabinet with a damp cloth. Avoid getting water in the area of the control panel.
7. Replace the drawer.
8. If the unit is to be left off, leave the drawer open two or three inches.