# ICE1806/1807 - CUBE ICE MAKER





## Features

- Space-saving 26" (660 mm) tall design.
- Produces up to 1954 lbs (888 kg) of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.

## Options & Accessories

WATER FILTERS						
Ice Machine	Man	Inline				
Model	System	System				
ICE1806	IFQ2	IOMQ (2)	n/a			
ICE1807	11 0(2	10110(2)	nju			

### Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years **Parts** and **Labor**.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years **Parts** and **Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

#### Ice Form

Bin Chart Kits for Combining Wider Bins with Smaller Models

	ICE STORAGE BINS											
	Model No. Capacity Width	<b>B25</b> 242 lbs (110 kg) 30 in (762 mm)	<b>B40</b> 344 lbs (156 kg) 30 in (762 mm)	<b>B42</b> 351 lbs (160 kg) 22 in (559 mm)	<b>B55</b> 510 lbs (232 kg) 30 in (762 mm)	<b>B70</b> 741 lbs (337 kg) 30 in (762 mm)	<b>B90</b> 1023 lbs (465 kg) 30 in (762 mm)	<b>B100</b> 854 lbs (388 kg) 48 in (1219 mm)	<b>B120</b> 1142 lbs (519 kg) 48 in (1219 mm)	<b>B150</b> 1447 lbs (658 kg) 60 in (1524 mm)	<b>B170</b> 1807 lbs (821 kg 60 in (1524 mm)	
Kits	ICE1806	· · · · · · · · · · · · · · · · · · ·						Kit Not Required				
	ICE1807			11,	/a				Kit Not I	Required		

\*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.



## 

CUBE

W x D x H (in.) 7/8 x 7/8 x 7/8 W x D x H (mm) 22 x 22 x 22


W x D x H (in.) 3/8 x 7/8 x 7/8 W x D x H (mm) 10 x 22 x 22







- A. Ice maker potable water in, <sup>3</sup>/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical junction box.
- E. Condenser water in, <sup>3</sup>/8" FPT (water only).
- F. Condenser water out, 1/2" FPT (water only).
- G. Liquid line, <sup>3</sup>/8" male quick connect coupling for precharged line set (remote only).
- H. Discharge line, 1/2" male quick connect coupling for precharged line set (remote only).
- Hole for remote electrical connections, <sup>7</sup>/8" (remote only).

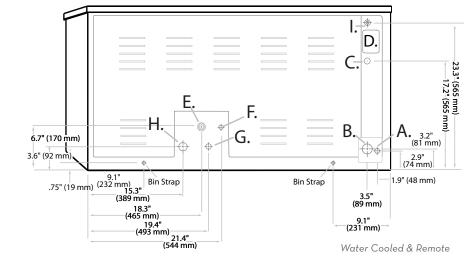

### **Operating Requirements**

	MINIMUM	MAXIMUM	
	60 Hz		
Ambient Temp. Range Air	50°F (10°C)	100°F (70°C)	
Water Temp.	40°F (4.4°C)	100°F (38°C)	
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)	

#### **Specifications**

			<b>duction</b> 24hrs	<b>Water Usage</b> gallons per 100 lbs of Ice 90°F air/70°F water		kWH Used				
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
ICE1806W	Water	1,832 (833)	1,628 (740)	21.9	139	3.8	208-230/60/1	22.0	- 30	27,687
ICE1806R	Remote*	1,617 (735)	1,461 (664)	21.0	-	5.0	200 230/00/1	27.7		28,110
ICE1807W	Water	1,779 (809)	1,603 (729)	21.9	134	3.9	208-230/60/3	12.3	15	27,560
ICE1807R	Remote*	1,592 (724)	1,444 (656)	21.3	-	4.9	200-230/00/3	17.1	20	27,514

NOTES:

Number of Wires: Approx. Shipping Weight Ibs (kg): Refrigerant Type: ICE1806: 3 (including ground) • ICE1807: 4 (including ground) ICE1806W 310 (141) • ICE1806R 335 (151) • ICE1807W 310 (141) • ICE1807R 335 (151) R404A

#### **Dimensions**

ALL MODELS					
W x D x H (in.)	48.25 x 24.25 x 26.06				
W x D x H (mm)	1,226 x 616 x 662				

\*Requires Remote VRC 5061 Condenser.