

Microcook MD 1800

Project _____
 Item _____
 Quantity _____
 CSI Section 11400 _____
 Approval _____
 Date _____

Microcook MD1800

Models

☒ MD1800



Standard Features

- 1800 Watt power output (IEC 705 Rating).
- Ergonomic digital touch pad control & easy to clean interior cavity.
- Side opening door allows up to 3 ovens to be stacked vertically.
- Fully programmable (up to 10 programs) including multi-stage programming (up to 3 stages per program) and x 2 and x 3 multi-portion facility.


Options & Accessories

Specifications

Fully commercial medium duty, stainless steel, stackable microwave oven with side opening door. Ideally suited for individual portions or small batch cooking.

- User friendly operation.
- Energy saving stand-by mode
- In-built diagnostics to avoid unnecessary service calls - easy to use fault finding card
- Quality assured BS EN ISO 9001 accreditation.



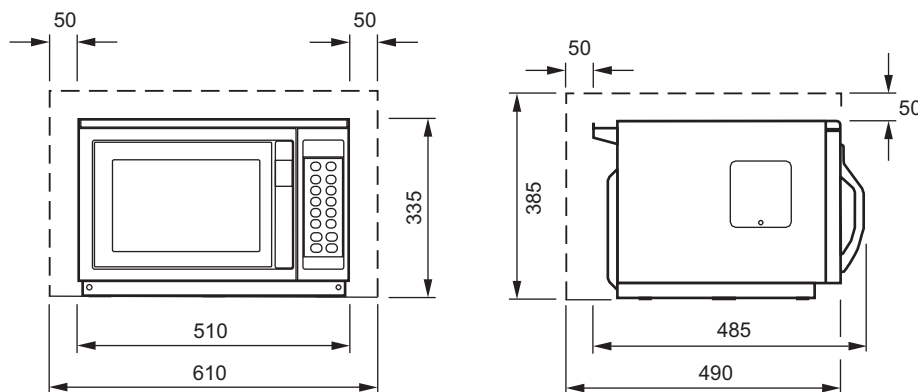

All dimensions in mm

Allow a minimum of 50mm clearance to sides, top and rear to allow air to circulate freely

DIMENSIONS

MODEL NO.	OVERALL SIZE mm			NET WEIGHT
	HEIGHT	WIDTH	DEPTH	
MD1800	335mm	510mm	485mm	30kg Nett 35kg Gross

Capacity 23 litres

Internal Dimensions mm (HxWxD) 210 x 330 x 330

POWER REQUIREMENTS

Power input 3.12kW maximum

ELECTRICAL SUPPLY			
Country	Voltage/Freq.	Arrangement	Connections Used
UK	230-240V 50Hz	Single Phase	1P N & E
EU	220-230V 50Hz	Single Phase	1P N & E

Moulded 13 Amp plug BS 1363A (UK only)

For oven models suitable for a 60Hz electrical supply, please contact the sales office.

MICROWAVE POWER

Output 1800 Watts (IEC705) @ 100%

Power Levels 100%, 75%, 50% & Progressive Defrost

Safety System Agency approved monitored interlock door system.

SAFETY FEATURES

Microwave safety interlocks on doors

Cavity overheat sensor

Automatic lock-out on invalid time setting

Magnetron overheat sensors

TECHNICAL SPECIFICATIONS

Magnetrons	Two
Safety interlocks	Four
Distribution system	Rotating Passive Antenna
Timer	Up to 9minutes 59seconds
Timer controls	Digital touch pad control
User interface	Built-in diagnostic messages Digital LED display of cooking time Easy-to-use pre-programmed operation 10 programs

CONSTRUCTION

Cavity: 304 Stainless Steel

Casework: 430 Stainless Steel

INSTALLATION INFORMATION

Away from major heat sources.

Place on a flat surface that is level, strong and stable.

Do not stack the oven directly on top of another.

Use a separate shelf or double tiered stand.

Allow sufficient clearance in front of the oven for the door to open fully (385mm) and the filter to be removed for cleaning.

If circuit breakers are in use, ensure Type C units are fitted.

For further information on Merrychef products and services or advice on which machine suits you best please contact the Sales Office.



Station Road West,
Ash Vale, Aldershot
Hampshire GU12 5XA
United Kingdom

Tel: +44 (0)1252 371000
Fax: +44(0)1252 371007
E-mail: info@merrychef.com

www.merrychef.com

Datasheet Part No.

32Z3370 Issue 4

Printed in the UK ©Merrychef Ltd.

Enodis®