WFAE-30F FRYER



Specifications

•		
Overall Dimensions:	Inches	MM
Width Depth Height (incl. 4" legs)	15 3/4 33 1/4 40	400 845 1016
Oil Capacity:	Lbs.	KG
WFAE-30F	30	14
Typical Production:	Lbs.	KG
Chicken frozen Chicken fresh	12 14	5 6
Weights:	Lbs.	KG
Installed Shipping	167 217	75 98

Export

The following model is available for export and meets the standards for **CE**:

• WFAE-30FEU, 380-415V, 3Ø, 9300 watts

Wells WFAE-30F High Production Open Fryer is engineered to meet today's high quality food service standards. The sleek, compact design of the WFAE-30F takes up less space than a standard fryer and uses up to 25% less oil than similar models.

Features

- Automatic Oil Temperature Control ensures precise temperatures to produce consistent high quality products while minimizing energy consumption.
- Flat bar element, located below the basket, is heavy-duty stainless steel with a low watt density for longer oil life.
- Repeat cycle timer activates using one push button operation.
- Oil filter system is easy to operate and combined with Flavor Saver Filter Powder will substantially increase oil life.
- Automatic basket lift cradle raises basket above oil at end of timed cook cycle, maximizing handling safety.
- Cover opens and closes automatically with the basket.
- Round frypot is constructed of spun stainless steel with a 30 lb. oil capacity.
- Nickel-plated, perforated steel basket has a detachable handle for lowering and removing basket from the frypot.
- The WFAE-30F fryer is Underwriters Laboratories, Inc. LISTED and meets NSF International standards.
- A one-year warranty against defects covers parts and labor.

Accessories / Options

Flavor Saver Oil Filter Powder, 45 packs, 22410 Oil Filter Paper, 21711 Rear Leg Kit, 22692

STANDARD














E6070

DIMENSIONS:





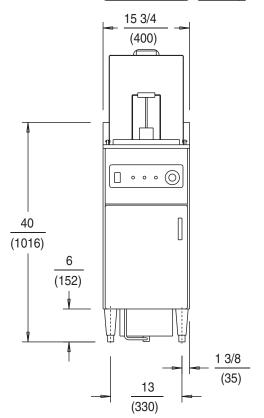

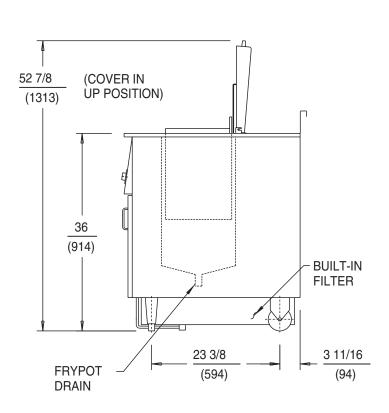

WFAE-30F ELECTRICAL SPECIFICATIONS:

MODELS VOLTS		WATTS	AMPS PER LINE PHASE 3			ASE 3	AMPS	POWER
MODELS	VULIS	WAIIS	L1	L2	L3	N	SINGLE PHASE	SUPPLY CORD
WFAE-30F	208	9000	25.5	25.0	25.5	NA	45.6	NONE
WFAE-30F	240	9000	22.3	21.7	22.3	NA	39.5	NONE
WFAE-30FE	J 380-41	5 9300	14.3	13.0	13.0	2.7	NA	NONE

Denotes export (EU) products.

NOTE: Specifications are subject to change without notice.

WELLS MANUFACTURING COMPANY

WELLS MANUFACTORING COMPANY

2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 689-5700 • FAX: (775) 689-5972

FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com

© 2001 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 03/01 • REV(D) • PART NO. 47342



