


SSFM-50AC Series

EVERPURE
WATER YOU CAN TRUST®

*Superior Water Disinfection for
Marine Applications*

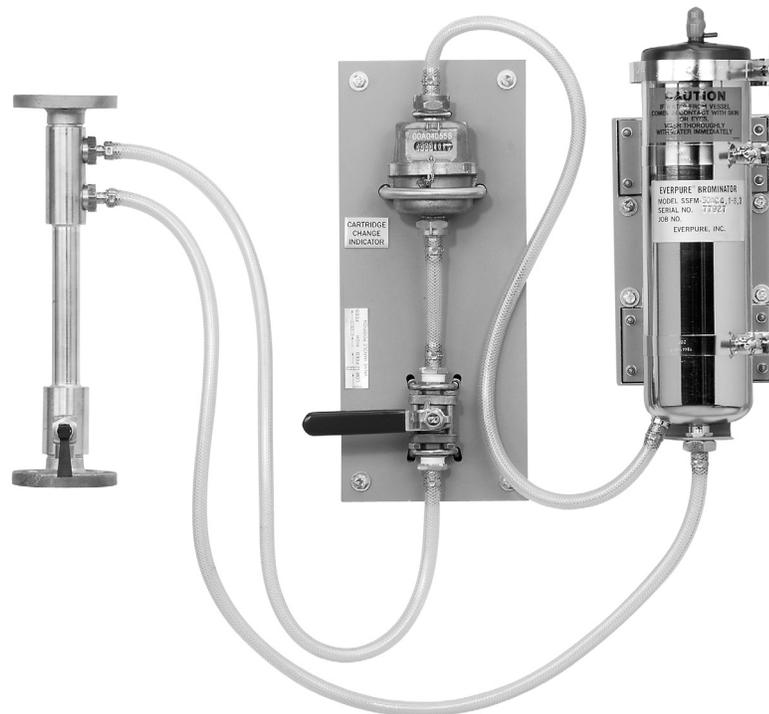

SSFM-50AC
(See back for
Part No.'s)

BENEFITS

- Simple to operate – No chemicals to mix
- Safe to handle – Not a fire or explosion hazard
- Effective Disinfectant – More effective across a broader pH range than chlorine
- Bromine is 4-10 times less noticeable in water than chlorine giving you better-tasting water
- Global service and parts availability
- Depended on by USN, USCG and offshore oil and gas rigs for safe, reliable water
- Recognized by the U.S. Navy as the safest, most reliable, and easy-to-use method of water disinfection aboard ship
- Requires no additional chemicals – Bromine cartridges are ready to use and require just 30 seconds to change
- Automatically delivers bromine to water in a constant ratio
- Automatic feeding system has simple hydraulic controls
- Lightweight for easy moving and installation
- Available as a non-magnetic unit for special applications

BROMINATION FOR SAFE, POTABLE WATER

Everpure proportioning bromine feeders add a predetermined quantity of elemental bromine into the freshwater discharge of the on-board watermaker prior to the potable water storage tank to ensure the potable water is bacteriologically safe for human consumption.

Everpure is the original manufacturer of bromine feeders and the manufacturer of the patented Everpure Brominating Cartridge (NSN 4610-01-022-9970). Equipment manufactured by Everpure is installed aboard nearly every US Navy surface warfare vessel, USCG Ships, USACE, NOAA, and numerous offshore oil, gas and production platforms. The Everpure Brominating Cartridge is recognized as the safest, most reliable, most effective and easy-to-use water disinfectant for marine applications; no more chemicals to mix, no fragile pumps and valves that clog, no flammable and/or explosive reactions with organics (fuel oils, paint, etc).

SPECIFICATIONS

Weight

SSFAM-50AC: 35 lbs. (15.9 kg)

Dry Weight

SSFAM-50AC: 30 lbs. (13.6 kg)

MOUNTING

System components should be vertically mounted on a bulkhead or stanchion within reasonable proximity to each other and the bypass header assembly. A minimum of 13 inches of overhead clearance is required above the feeder assembly for easy removal of the disposable bromine cartridge. For convenience, the instruction plate with operating procedure should be bulkhead mounted adjacent to the proportioning bromine feeder.

PLUMBING TERMINATIONS

The proportioning bromine feeder is flanged per MIL-F-20042, 3/4-inch for all SSFAM-50AC series models. A three valve bypass loop should be plumbed into bypass the proportioning bromine feeder during maintenance or bromine cartridge change. This bypass loop can be provided by the installer.


SIZING AND ORDERING A PROPORTIONING BROMINATOR

For each distiller / watermaker served, determine the capacity in gallons per day. Using this figure, calculate the discharge in gallons per minute. For example: 12,000 gpd /24, /60 = 8.3 gpm. Choose a part number corresponding to these flow rates:

SSFAM-50AC SERIES BROMINATOR FLOW RATE (gpm)	SSFAM-50AC SERIES BROMINATOR PART NO.	REPLACES PART NO.
0.7	169096	EV906410
0.8 – 1.2	169097	EV906411
1.3 – 1.4	169098	EV906412
1.5 – 1.8	169099	EV906413
1.9 – 3.0	169100	EV906414
3.1 – 4.0	169101	EV906415
4.1 – 8.3	169102	EV906416

NOTES

A potable water storage tank should be treated whenever it is filled from a shore source, or whenever there is no measurable bromine residual in the tank. A measurable bromine residual will insure the water is safe to drink. See our recirculating brominator data sheets for this application.

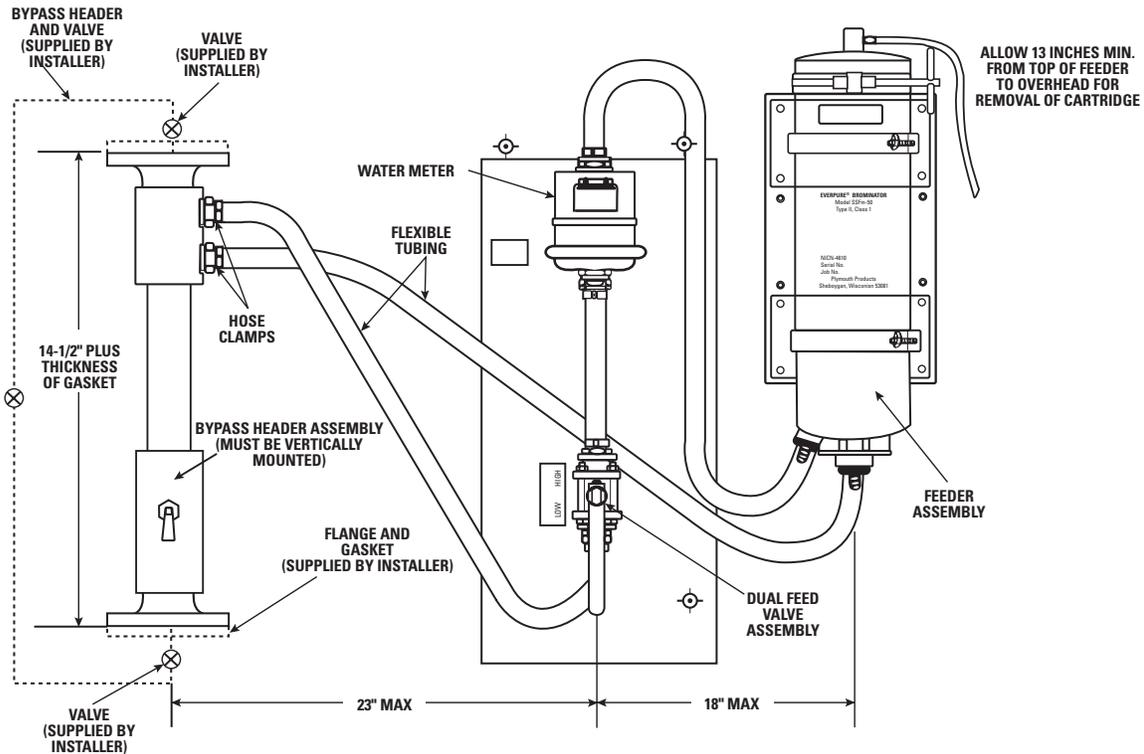

EVERPURE
WATER YOU CAN TRUST®

Pentair Filtration, Inc.
502 Indiana Avenue - P.O. Box 1047
Sheboygan, Wisconsin 53082-1047
Phone 866.873.7506 Fax 888.203.7361
International Phone 920.457.9435 International Fax 920.457.2417
www.everpure.com