

# Amana® Commercial

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



Model LD10D2 shown

## Low Volume

This category of microwave is ideal for...

### Applications:

- Employee lounges
- Espresso bars
- Kiosks
- Vending



All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

## Low Volume

### Amana Commercial Microwave Model LD10D2

#### Power Output

- 1000 watts of power for fast heating.
- Full power only for simple operation.

#### Certified Oven for Commercial Applications

- Tested to higher standards for a commercial rating - required by most commercial insurance policies and health inspectors.
- Interlock safety switch is tested to 4 times the standard of residential ovens.
- Constructed to withstand the foodservice environment, multiple users and variable ambient temperatures.
- Compared to a residential oven, this oven is more powerful for faster heating and better quality results.
- Engineered for a simple, "self-service" operation.

#### Easy to Use

- Great replacement for inappropriate domestic ovens in a foodservice application.
- Six minute dial timer is easy to use.
- See-through door and lighted interior for monitoring without opening the door.
- .95 cubic foot (.027m<sup>3</sup>) capacity accommodates a 13" (330 mm) platter, prepackaged foods and single servings.

#### Easy to Maintain

- Gray painted exterior and interior for easy cleaning.
- Sealed-in ceramic shelf for easy cleaning.
- Constructed to withstand the foodservice environment.
- Limited 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- UL and NSF Listed and CSA Certified.




A/A File #:


Specification #:



# Amana Commercial Microwave Model LD10D2 | Low Volume

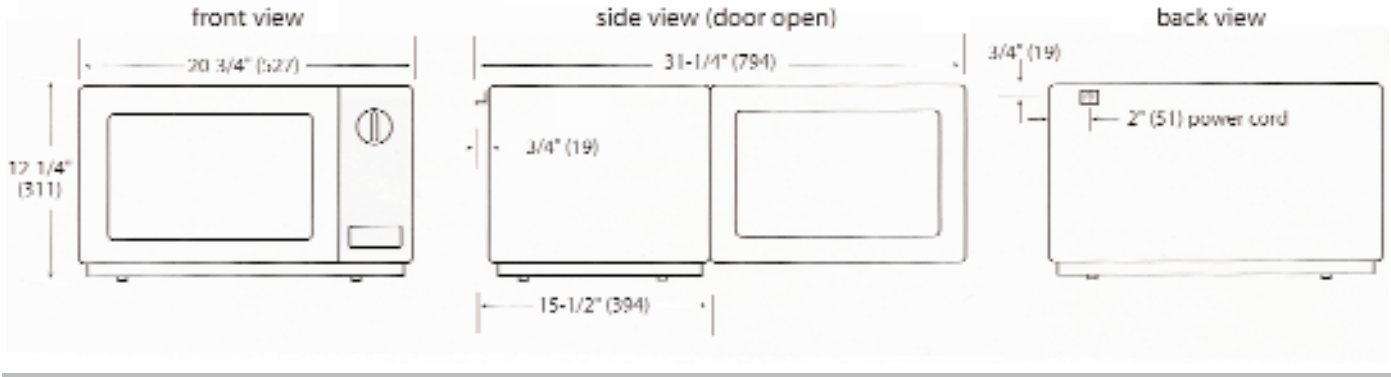

## Specifications

Model	LD10D2	UPC CODE 042159062966
Configuration	Countertop	
Control System	Dial	
Max. Cooking Time	6:00	
Power Levels	1	
Time Entry Option	Yes	
Microwave Distribution	Rotating stirrer, bottom	
Magnetron	1	
Stage Cooking	1 stage	
Interior Light	Yes	
Door Opening System	Push Button	
Signal	End of cycle	
Exterior Dimensions	H 12 3/8" (359)	W 20 7/8" (530) D** 15 1/2" (394)
Cavity Dimensions	H 8 3/4" (222)	W 13 3/4" (348) D 13 5/8" (346)
Door Depth	31 1/4" (794mm), 90°+ door open	
Usable Cavity Space	.95 cubic ft. (.027m <sup>3</sup> )	
Exterior Finish	Painted gray finish	
Interior Finish	Painted white finish	
Power Consumption	1500 W, 13.3 A	
Power Output*	1000 W* Microwave	
Power Source	120V, 60 Hz, 15 A single phase	
Plug Configuration / Cord	NEMA 5-15	5 ft. (1.5m) 
Frequency	2450 MHz	
Product Weight	36 lbs. (16 kg.)	
Ship weight (approx.)	39 lbs. (18 kg.)	
UPS Shippable	Yes	
Shipping Carton Size	L 17 7/8" (454)	W 24 3/8" (619) H 15" (381)

Measurements in ( ) are millimeters

\* IEC 705 Tested

\*\* Includes handle

## Specifications

Commercial microwave shall have a user-friendly 6 minute dial timer with an end of cycle audible signal. Oven shall have one power level - full power. Microwave output shall be 1000 watts distributed by one magnetron with a rotating stirrer to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and pull handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large .95 cubic ft. (.027 m<sup>3</sup>) cavity accommodates a 13" (330 mm) platter. Oven shall have a white painted interior and gray exterior. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, UL and CSA for safety and NSF for sanitation.



## Warranty

Limited 3 year warranty:

Year 1 - parts, labor, and travel are covered.

Years 2 - 3 - magnetron tube (part only) is covered.

## Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.



866-426-2621

