

MENUMASTER[®] Commercial

Project #: _____

Item #: _____



Model MCS10DS shown

Medium Volume

This category of microwave is ideal for...

Applications:

- Coffee shops
- Ethnic restaurants
- Concessions
- Dessert stations



All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

Medium Volume

Menumaster Commercial Microwave Model MCS10DS

Power Output

- 1000 watts of power.
- Full power only for simple operation.

Easy to Use

- User friendly six minute dial timer lights up for at-a-glance monitoring.
- Timer must be manually reset to zero if door is opened during heating.
- See-through door and lighted interior for monitoring without opening the door.
- 1.2 cubic ft. (.034m³) capacity accommodates a 14" (356 mm) platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a commercial look.
- Constructed to withstand the foodservice environment.
- Non-removable air filter protects oven components.
- Limited 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- UL and ETL Listed.




A/A File #:


Specification #:



MenuMaster Commercial Microwave Model MCS10DS | Medium Volume

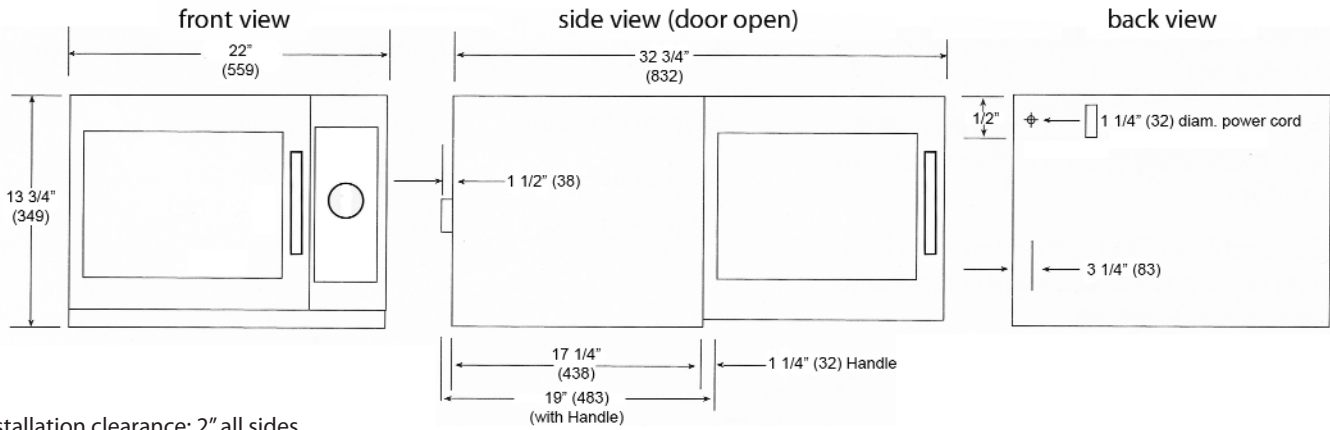

Specifications

| | | | |
|---------------------------|--|--------------|---|
| Model | MCS10DS | UPC Code | 728028020755 |
| Configuration | Countertop | | |
| Control System | Dial | | |
| Max. Cooking Time | 6:00 | | |
| Power Levels | 1 | | |
| Time Entry Option | Yes | | |
| Microwave Distribution | Rotating antenna, top | | |
| Magnetron | 1 | | |
| Stackable | Yes | | |
| Stage Cooking | 1 | | |
| Interior Light | Yes | | |
| Door Handle | Grab & Go | | |
| Signal | End of cycle | | |
| Exterior Dimensions | H 13 3/4" (349.25) W 22" (558.8) D*19" (482.6) | | |
| Cavity Dimensions | H 8 1/2" (216) W 14 1/2" (368.3) D 15" (381) | | |
| Door Depth | 34 3/4" (882.65), 90°+ door open | | |
| Usable Cavity Space | 1.2 cubic ft. (.034 m ³) | | |
| Exterior Finish | Stainless steel | | |
| Interior Finish | Stainless steel | | |
| Power Consumption | 1550 W, 13 A | | |
| Power Output** | 1000 W** Microwave | | |
| Power Source | 120V, 60 Hz, 15 A single phase | | |
| Plug Configuration / Cord | NEMA 5-15 | 5 ft. (1.5m) |  |
| Frequency | 2450 MHz | | |
| Product Weight | 41 lbs. (18.6 kg.) | | |
| Ship weight (approx.) | 48 lbs. (21.8 Kg.) | | |
| Shipping Carton Size | H 17" (431.4) W 26" (660.4) D 20" (508) | | |
| UPS Shippable | Yes | | |

Measurements in () are millimeters

* Includes handle

** IEC 705 Tested

Specifications

Commercial microwave shall have a user-friendly 6 minute dial timer with illuminated digits and an end of cycle audible signal. Timer shall not automatically reset if the door is opened during heating. There shall be a single power level and cooking stage. Microwave output shall be 1000 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.2 cubic ft. (.034 m³) cavity shall accommodate a 14" (356 mm) platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel exterior and interior and be stackable to save counter and shelf space. The air filter shall be permanently affixed to the front of the oven. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, UL for safety and ETL for sanitation.



Warranty

Limited 3 year warranty:

Year 1 - parts, labor, and travel are covered.

Years 2 - 3 - magnetron tube (part only) is covered.

Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.



Specification #:

AIA File #:

