

DROP-IN SERVING EQUIPMENT

COLD PAN

(3" Recessed Top)

Refrigerated, with Side Coils
Self-Contained or Remote



RM-4 SHOWN

Item No. _____

Quantity _____

- | | |
|-------------------------------|--------------------------------|
| <input type="checkbox"/> RM-1 | <input type="checkbox"/> RMX-1 |
| <input type="checkbox"/> RM-2 | <input type="checkbox"/> RMX-2 |
| <input type="checkbox"/> RM-3 | <input type="checkbox"/> RMX-3 |
| <input type="checkbox"/> RM-4 | <input type="checkbox"/> RMX-4 |
| <input type="checkbox"/> RM-5 | <input type="checkbox"/> RMX-5 |
| <input type="checkbox"/> RM-6 | <input type="checkbox"/> RMX-6 |



DESCRIPTION:

The RM series refrigerated cold pan eliminates the mess and expense of ice in your cold food displays. In addition, this cold pan, 9" deep, has copper tubing wrapped around its side walls to meet the strictest health department codes. The drop-in pan can be installed in virtually any counter and can be provided as fully self-contained - just plug it in and turn it on - or remote, where there's a need to locate the compressor at a different location.

The pan is fully insulated for maximum efficiency and energy savings, and is provided with a factory applied gasket so that it can be installed in the finest wood fixtures without marring the counter top. The pan is constructed of stainless steel and is provided with a 3/4" stainless steel drain. The cold pan accommo-

dates standard 12" x 20" pans, perfect for any cold food serving application.

FEATURES:

- Refrigerated copper tubing around all sides
Meets your toughest health department standards
- Fully insulated for maximum efficiency and energy savings
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- Utilizes standard 12" x 20" pans, 2-1/2", or 4" deep or fractional size pans with the use of adapter bars
- Classified NSF Standard 7 by UL



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475


COLD PAN

Refrigerated, with Side Coils Self-Contained or Remote

	MODEL	PAN OPENINGS	"A"	PAN SIZE	ELECTRICAL CHARACTERISTICS	CUT-OUT REQUIRED	RM WEIGHT
<input type="checkbox"/>	RM-1	1	18-1/4	19-7/8" X 11-7/8" X 9"	3.0 amps. - 120V 1/5 HP	24-1/2" X 16-1/2"	146
<input type="checkbox"/>	RM-2	2	32	19-7/8" X 25-5/8" X 9"	6.0 amps. - 120V 1/4 HP	24-1/2" X 30-1/4"	205
<input type="checkbox"/>	RM-3	3	45-3/4	19-7/8" X 39-3/8" X 9"	6.0 amps. - 120V 1/4 HP	24-1/2" X 44"	250
<input type="checkbox"/>	RM-4	4	59-1/2	19-7/8" X 53-1/8" X 9"	7.8 amps. - 120V 1/3 HP	24-1/2" X 57-3/4"	280
<input type="checkbox"/>	RM-5	5	73-1/4	19-7/8" X 66-7/8" X 9"	10.7 amps. - 120V 1/2 HP	24-1/2" X 71-1/2"	305
<input type="checkbox"/>	RM-6	6	87	19-7/8" X 80-5/8" X 9"	10.7 amps. - 120V 1/2 HP	24-1/2" X 85-1/4"	370

	REMOTE* REFRIGERATION MODEL	RMX LESS COMP.
<input type="checkbox"/>	RMX-1	85
<input type="checkbox"/>	RMX-2	140
<input type="checkbox"/>	RMX-3	185
<input type="checkbox"/>	RMX-4	215
<input type="checkbox"/>	RMX-5	240
<input type="checkbox"/>	RMX-6	300

** Remote refrigeration does not include compressor.

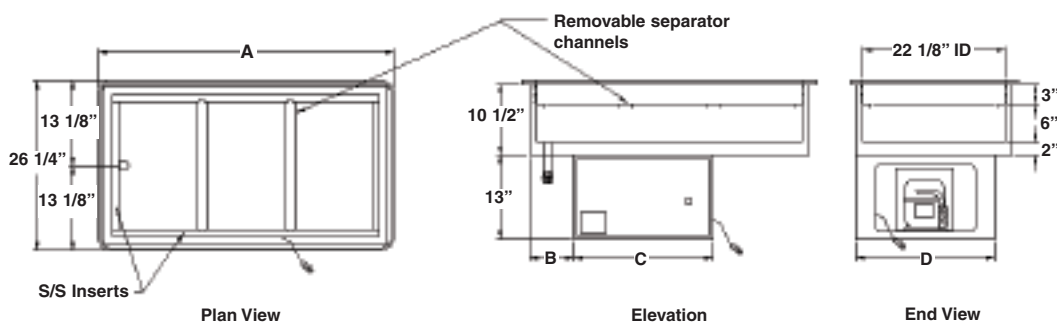

	B	C	D
RM-1	6"	18"	13 3/4"
RM-2	7"	21 1/2"	21 5/8"
RM-3	7"	21 1/2"	21 5/8"
RM-4	7"	21 1/2"	21 5/8"
RM-5	7"	21 1/2"	21 5/8"
RM-6	7"	21 1/2"	21 5/8"

SPECIFICATIONS:

TOP: Constructed of 18 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top.

LINER: The inner liner shall be 18 gauge, type 304 stainless steel with 3" recessed top, one piece construction, all welded, ground and polished to a uniform finish. All corners are covered with a minimum 1/4" radius. The liner has copper tubing firmly soldered to the top 3" of all sides. A 3/4" dia. drain with strainer, 4" PVC nipple, and valve is provided.

INSULATION: The pan is fully insulated with high density polystyrene, 1" thick on all sides, 2" thick on the bottom and enclosed with a 22 gauge galvanized steel outer lines. The entire unit is removable without the use of tools.

REFRIGERATION SYSTEM: The compressor housing shall be fabricated from formed angles /and bolted to the base of the unit. A fully self-contained condensing unit is provided with a hermetically sealed compressor and a thermostat control. The system is fully charged with HFC free refrigerant and ready to operate.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL: (RM series only) The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off thermostat switch and pilot light. A 6' long, 3-wire cord and plug (NEMA 5-15P) will be provided.

Specifications subject to change without notice.

ACCESSORIES:

- ☐ Remote switch
- ☐ Stainless steel adapter bars
- ☐ 5-year extended compressor warranty
- ☐ Remote compressor (hook-up in field by others)
 - ☐ 1/5 HP for RM-1
 - ☐ 1/4 HP for RM-2 & RM-3
 - ☐ 1/3 HP for RM-4
 - ☐ 1/2 HP for RM-5
 - ☐ 1/2 HP for RM-6
- ☐ Condensate evaporator



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475