

DROP-IN SERVING EQUIPMENT

COLD PAN

Refrigerated, Full Depth Self-Contained or Remote

These units have not been performance tested for use with potentially hazardous foods, and must be used with ice.



WCMD-3 SHOWN

Item No. _____

Quantity _____

- ☐ **WCMD/WCMDX-1**
- ☐ **WCMD/WCMDX-2**
- ☐ **WCMD/WCMDX-3**
- ☐ **WCMD/WCMDX-4**
- ☐ **WCMD/WCMDX-5**
- ☐ **WCMD/WCMDX-6**

**NOTE: NSF-C & UL
(FOR WCMD ONLY)**



DESCRIPTION:

The WCMD series refrigerated cold pan eliminates the mess and expense of ice in your cold food displays and will hold your deepest pan or insert with its 9-3/4" depth. The drop-in pan can be installed in virtually any counter and can be provided as fully self-contained - just plug it in and turn it on - or remote, where there's a need to locate the compressor at a different location.

The pan is fully insulated for maximum efficiency and energy savings, and is provided with a factory applied gasket so that it can be installed in the finest wood fixtures without marring the counter top. The pan is provided with a 3/4" stainless steel drain. The cold pan

accommodates standard 12" x 20" pans, perfect for any cold food serving application.

FEATURES:

- Accommodates your deepest pan or insert - 9-3/4" deep
- Fully insulated for maximum efficiency and energy savings
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- Utilizes standard 12" x 20" pans, or fractional size pans with the use of adapter bars
- NSF certified - WCMD series is UL recognized



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475

COLD PAN


Refrigerated, Standard Depth Self-Contained or Remote

	MODEL	PAN OPENINGS	"A"	PAN SIZE	ELECTRICAL CHARACTERISTICS	CUT-OUT REQUIRED	SHIP WT. (lbs.)
<input type="checkbox"/>	*WCMD-1	1	16	19-7/8" X 11-3/4" X 9-3/4"	2.4 amps. - 120V 1/5 HP	22-1/4" X 14-1/4"	110
<input type="checkbox"/>	WCMD-2	2	29-3/4	19-7/8" X 25-1/2" X 9-3/4"	3.9 amps. - 120V 1/5 HP	22-1/4" X 28"	150
<input type="checkbox"/>	WCMD-3	3	43-1/2	19-7/8" X 39-1/4" X 9-3/4"	3.9 amps. - 120V 1/5 HP	22-1/4" X 41-3/4"	175
<input type="checkbox"/>	WCMD-4	4	57-1/4	19-7/8" X 53" X 9-3/4"	6.8 amps. - 120V 1/4 HP	22-1/4" X 55-1/2"	215
<input type="checkbox"/>	WCMD-5	5	71	19-7/8" X 66-3/4" X 9-3/4"	9.8 amps. - 120V 1/3 HP	22-1/4" X 69-1/4"	245
<input type="checkbox"/>	WCMD-6	6	84-3/4	19-7/8" X 80-1/2" X 9-3/4"	9.8 amps. - 120V 1/3 HP	22-1/4" X 83"	310

	REMOTE** REFRIGERATION MODEL	RMX LESS COMP.
<input type="checkbox"/>	WCMDX-1	90
<input type="checkbox"/>	WCMDX-2	125
<input type="checkbox"/>	WCMDX-3	160
<input type="checkbox"/>	WCMDX-4	180
<input type="checkbox"/>	WCMDX-5	220
<input type="checkbox"/>	WCMDX-6	260

* Drain location on 16" dimension

** Remote refrigeration does not include compressor. Thermostat control, drier, and cap. tube are included.

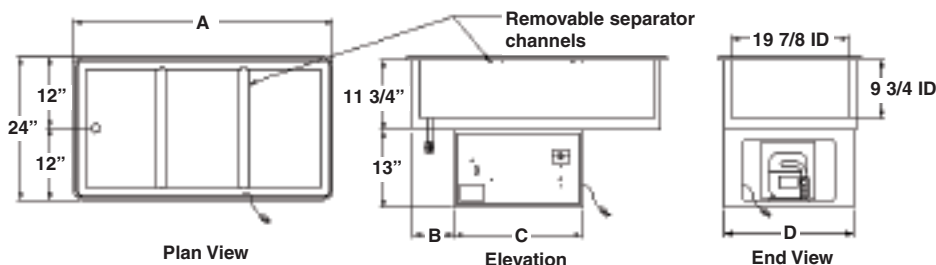

	B	C	D
WCMD-1	3 7/8"	18"	13 3/4"
WCMD-2	6"	21 1/2"	21 5/8"
WCMD-3	7"	21 1/2"	21 5/8"
WCMD-4	7"	21 1/2"	21 5/8"
WCMD-5	7"	21 1/2"	21 5/8"
WCMD-6	7"	21 1/2"	21 5/8"

SPECIFICATIONS:

TOP: Constructed of 18 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top. Embossed mounting lugs are provided along the inner surface of the top to hold the removable adapter bars in place.

LINER: The inner liner shall be 18 gauge, type 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. All corners are coved with a minimum 1/4" radius. A 3/4" dia. drain with strainer, 4" PVC nipple, and valve is provided.

INSULATION: The pan is fully insulated with high density polystyrene, 1" thick on all sides, 2" thick on the bottom and enclosed with a 22 gauge galvanized steel outer lines. The entire unit is removable without the use of tools.

REFRIGERATION SYSTEM: (WCMD series only) The compressor housing shall be fabricated from 14 gauge galvanized and bolted to the base of the unit. A fully self-contained condensing unit is provided with a hermetically sealed compressor and a thermostat control. The system is fully charged with CFC

free refrigerant and ready to operate.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL: (WCMD series only) The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off thermostat switch and pilot light. A 6' long, 3-wire cord and plug (NEMA 5-15P) will be provided.

Specifications subject to change without notice.

ACCESSORIES:

- ☐ Stainless steel adapter bars
- ☐ 5-year extended compressor warranty
- ☐ Remote compressor (hook-up in field by others)
 - ☐ 1/5 HP for WCMDX-1,2,& 3
 - ☐ 1/4 HP for WCMDX-4
 - ☐ 1/3 HP for WCMDX-5 & 6
- ☐ Condensate evaporator
- ☐ Remote switch



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475