

DROP-IN SERVING EQUIPMENT

ICE CREAM FREEZER Refrigerated, Self-Contained

Item No. _____

Quantity _____

☐ **WDF-2**

☐ **WDF-3**



WDF-2 SHOWN



DESCRIPTION:

The WDF series ice cream deep freeze lets you bring the profitability of reach-in ice cream service to your serving line. Ideal for ice cream or any frozen dessert, this drop-in can be installed in virtually any counter and is fully self-contained - just plug it in and turn it on.

The pan is fully insulated for maximum efficiency and energy savings, and is provided with a factory applied gasket so that it can be installed in the finest wood fixtures without marring the counter top. The interior is constructed of stainless steel. The deep freeze is also perfect for a beer mug or

salad plate chiller and can be specified with a Plexiglass lid.

FEATURES:

- Fully insulated for maximum efficiency and energy savings
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- Ideal for frozen dessert or use it as a mug or plate chiller
- NSF certified and UL recognized



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475


ICE CREAM FREEZER

MODEL	"A"	ELECTRICAL CHARACTERISTICS			ELECTRICAL CHARACTERISTICS	CUT-OUT REQUIRED	SHIP WT. (lbs.)
		SIZE WxLxD	CU. FT. CAPACITY	LBS. CAPACITY			
<input type="checkbox"/> WDF-2	29-3/4"	16-1/2" X 22-1/2" X 13-1/2"	6.8	100	6.8 amps - 120V - 1/4 HP	22-1/4" X 28"	175
<input type="checkbox"/> WDF-3	43-1/2"	16-1/2" X 36-1/2" X 13-1/2"	6.8	150	6.8 amps - 120V - 1/4 HP	22-1/4" X 41-3/4"	200

WDF "B" dim.

WDF-3 3"

WDF-2 6-7/8"

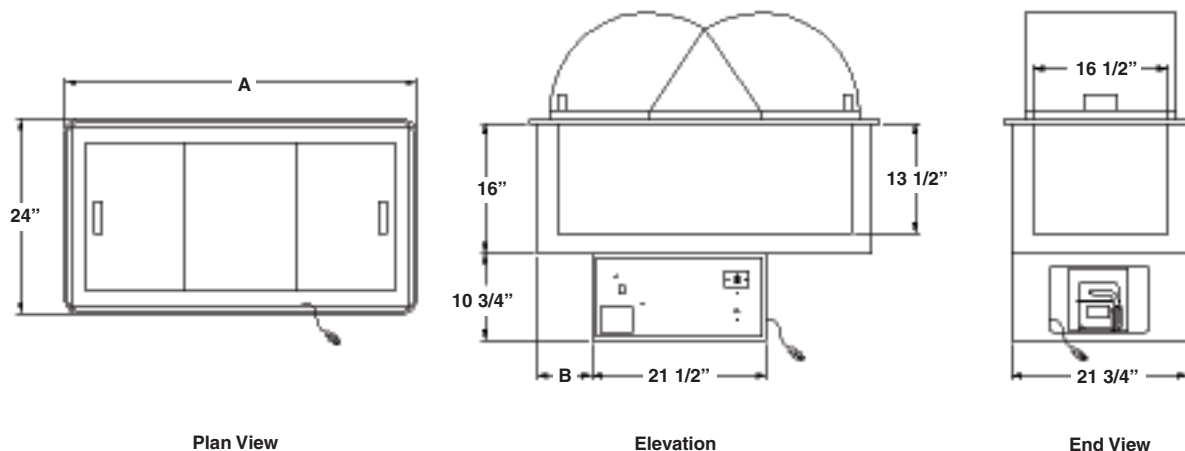

SPECIFICATIONS:

TOP: Constructed of 18 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top.

LINER: The inner liner shall be 18 gauge, type 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. All corners are coved with a minimum 1/4" radius on the horizontal edges and a minimum 3/4" radius on the vertical edges. The liner has copper tubing firmly soldered to the exterior sides and bottom. The unit is provided with an all stainless steel insulated hinged, lift off lid, with plastic coated pulls.

INSULATION: The pan is fully insulated with high density polystyrene, 2-1/2" thick on all sides, and enclosed with a 22 gauge galvanized steel outer liner. The entire unit is removable without the use of tools.

REFRIGERATION SYSTEM: The compressor housing shall be fabricated from 14 gauge galvanized and bolted to the base of the unit. A fully self-contained condensing unit is provided with a hermetically sealed compressor and a thermostat control. The system is fully charged with CFC free refrigerant and ready to operate.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL: The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off thermostat switch and pilot light. A 6' long, 3-wire cord and plug (NEMA 5-15P) will be provided.

Specifications subject to change without notice.

ACCESSORIES:

- ☐ 5-year compressor warranty
- ☐ Hinged Plexiglass lid
- ☐ Lid locking device
- ☐ Remot compressor
- ☐ Condensate evaporator
- ☐ Remote switch



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475