

SLIDE-IN UNITS

HEATED BASE Electrically Heated Under Counter

Item No. _____

Quantity _____

☐ **HB-3**

☐ **HB-4**

☐ **HB-5**



HB-3 SHOWN



DESCRIPTION:

This convenient to use heated base puts back-up storage where you need it most - directly at your finger tips. The unit simply slides into your existing fabricated counter.

Available in three sizes, all double door units, with capacities of 8, 12, or 16 standard 12" x 20" pans, stored on removable slide assemblies. All units are electrically heated and pre-wired to an on/off thermostat switch. Just plug it in and turn it on.

FEATURES:

- Builds into your counter - puts heated storage where you need it.
- Fully insulated for maximum efficiency
- Slide assembly for standard 12" x 20" pans
- Electrically heated - thermostat control
- UL recognized




a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475

HEATED BASE

Electrically Heated Under-Counter

	MODEL	"A"	STORAGE CAPACITY 12" X 20" PANS	ELECTRICAL CHARACTERISTICS	CUT-OUT REQUIRED	SHIP WT. (lbs.)
<input type="checkbox"/>	HB-3	41-3/4"	8	850 W - 7.1 amps. 120 V	15-3/4" X 41-3/4"	190
<input type="checkbox"/>	HB-4	55-1/2"	12	850 W - 7.1 amps. 120 V	15-3/4" X 55-1/2"	265
<input type="checkbox"/>	HB-5	69-1/4"	16	850 W - 7.1 amps. 120 V	15-3/4" X 69-1/4"	300

NOTE: All units are 23-5/8" deep. Available in 208 or 240 volt.

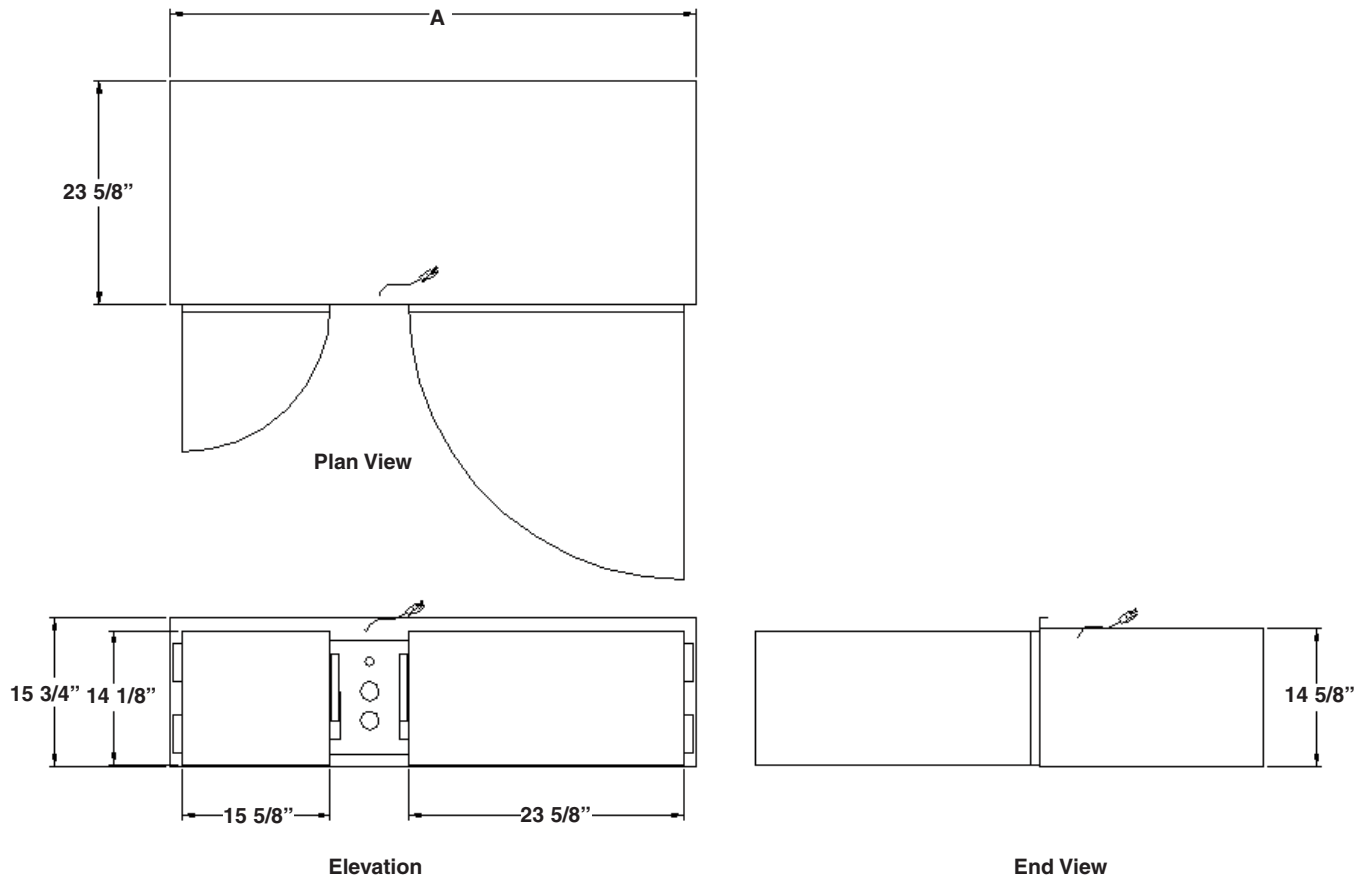

SPECIFICATIONS:

BODY: Double wall constructed with 20 gauge, type 304 stainless steel interior liner, with coved corners. Exterior wall is 22 gauge galvanized steel, with an 18 gauge stainless steel facia. The body is filled with 1' of high density fiberglass insulation on all sides. Interior of the body is provided with a removable slide assembly to accommodate 12" x 20" pans.

DOORS: Doors are double wall constructed of 18 gauge, type 304 stainless steel, fully insulated with

high density fiberglass, and provided with edge mounted, chrome plated hinges and a slam action latch. Doors are complete with a moisture-proof gasket.

ELECTRICAL: The unit is provided with an 850 watt element, pre-wired to an on/off thermostat switch and pilot light. The unit is wired for 15 amp., 120 volt, single phase operation, with a 6' long, 3-wire cord and plug (NEMA 5-iSP).



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475