

The Ultimate Outdoor Broiler

OUTDOOR CHAR BROILERS



Model CBBQ-60S-CP with optional 30" in-line griddle plate

SPECIFICATIONS

The Ultimate Outdoor Char Broilers are designed for broiling, grilling, steaming, roasting and holding all in a single piece of equipment.

CBBQ models feature 30" wide (762mm) or 60" wide (1524mm) by 24" deep (610mm) broiling areas. All models come standard with an all stainless steel exterior, an 8" deep (203mm) stainless steel work deck, stainless steel valve panel, stainless steel water/grease pans, heavy-duty nickel-chrome plated removable top grates.

Built-in models come with front removable water/grease pans and roll-top hood(s).

Base models come with stainless steel stand, legs, casters (two with locks) and side-mounted tank bracket(s) to accommodate 20 lb. L.P. tanks.

Packages also include mobile tank caddy and 40 lb. L.P. tank(s).

Complete Packages also include the customer's choice of roll-top hood(s) or wind & splash guard(s).

20,000 BTUH steel burners are located every 7" (178mm) for maximum top heat intensity and greater production with independently controlled, adjustable burner valves for precision control and energy efficiency.

Standard crossover pilot tube system provides additional safety, energy savings and ease of operation.

Exteriors are fabricated of heavy gauge type 430 stainless steel with a #4 finish. Interiors are fabricated of 18-gauge high-heat resistant aluminized steel. Overall exterior dimensions are 33 1/2" deep (826mm) and either 32" (813mm) or 62 1/2" (1588mm) wide. Height is 36" (915mm) overall including stand, legs and casters.

One (1) year limited parts and labor warranty included.

Job	Item #
000	100111 //

GAS CHAR BROILERS

G

BUILT-IN MODELS
CBBQ-30S-BI
CBBQ-60S-BI
PACKAGES
CBBQ-30S-P
CBBQ-30S-P
CBBQ-60S-P
CBBQ-60S-P
CBBQ-60S-CP

STANDARD FEATURES

20,000 BTUH steel burners every 7" (178mm) with
independently controlled, adjustable valves for each burner

- ☐ Up to 160,000 BTUH per broiler in natural or LP gas
- Crossover pilot tube system
- Stainless steel radiant heat defectors
- ☐ Heavy-duty nickel-chrome plated top grates
- ☐ Stainless steel, front-mounted work deck 8" deep (203mm)
- Stainless steel valve panel
- Stainless steel outer construction
- Stainless steel water / grease pans
- Pressure regulator(s)
- Stainless steel stand
- Set of 4 heavy duty stainless steel legs with casters two with locks
- Limited one year part & labor warranty

OPTIONS & ACCESSORIES


- Smoke & Roast roll-top hoods in 30" (762mm) or 60" (1524mm) sizes
- ☐ Wind & Splash guards in 30" (762mm)
- ☐ Steamer System 15" wide (381mm)
- ☐ Full size pan set with lid
- □ 1/2 Size pan set with lids
- ☐ Side mounted work deck / service shelf
- ☐ Rear mounted work deck / service shelf
- Stainless steel undershelves
- ☐ Ritchlite cutting boards in 30" (762mm) or 60" (1524mm) sizes for front-mounted work decks
- □ 11" Wide (279mm) removable griddle plate
- □ 30" Wide (762mm) In-Line griddle plate
- All weather covers
- Propane tank caddies
- 20 lb. or 40 lb. LP tanks with hoses
- Built-in version

CERTIFICATIONS







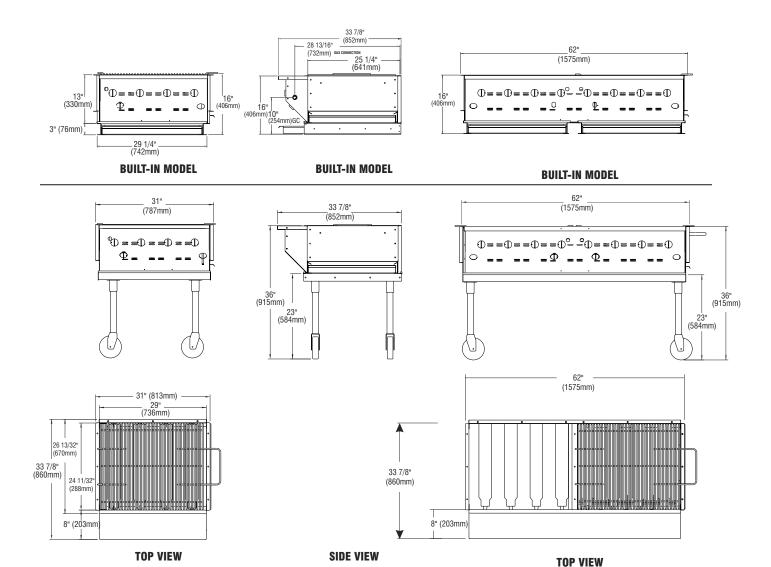

ALL DIMENSIONS NOMINAL

SHIPPING INFORMATION											
	Shipping	y Weight		Carton Dimensions					Crate Size		
Model Lbs. Kilos			Wi Inches	Width Inches mm		Depth Inches mm		Height Inches mm		Cubic Meter	•
CBBQ-30	300	136	33	838	30	762	19	483	10.8	.30	
CBBQ-60	500	227	63	1600	30	762	19	483	20.8	.58	

Model	GAS TYPE	BTUH	KW	CONNECTION	# of CONNECTIONS
CBBQ-30	LP	80,000	23.44	3/8"	1
CBBQ-30	natural	80,000	23.44	3/4"	1
CBBQ-60	LP	160,000	46.88	3/8"	2
CBBQ-60	natural	160,000	46.88	3/4"	1

SPECIFICATIONS										
	# Top	# of	Overall Dimensions*							
Madel	el in mm		Grates	Burners	Width		Depth		Height	
Model	III.	"""			Inches	mm	Inches	mm	Inches	mm
CBBQ-30	29 x 24	736 x 610	1	4	31	813	33 7/8	860	36	915
CBBQ-60	58 x 24	1473 x 610	2	8	62	1575	33 7/8	860	36	915

*Height includes stand & legs