

2828 SERIES ELECTRIC DECK OVENS



Model EP-2-2828

SPECIFICATIONS

BAKERS PRIDE EP-EB Series Electric Deck Ovens are designed for high volume pizza, baking, roasting and all-purpose operations. Interior decks are 28" (711mm) deep and 28" (711mm) wide. Overall dimensions are 33 1/4" (845mm) deep by 42" (1067mm) wide.

Each oven has two decks with separate tilt-up doors. Each door has glass windows and are spring balanced. Ovens may be stacked two high.

Oven exteriors are all heavy-gauge, type 430 stainless steel and are fully insulated for cooler outer temperatures and consistent interior temperatures. Over interiors are manufactured of high-heat resistant 18-gauge aluminized steel.

Each deck features independent, operator controlled top & bottom heat for perfectly balanced results and a 200° -750° F (100° -400° C) thermostat. 5 1/4" (133mm) interior deck height with 3/4" (19mm) thick Cordierite hearth decks (steel decks optional).

EP (pizza) models feature a 15 minute timer. The EB (bake)models feature a 60-minute electric timer. Both models have continuous-ring, audible timer alarms and manual shut-offs.

2828 Models are 9KW and feature 7 electric elements (4 top and 3 bottom). Voltages are available in 208v, 220-240v 1Ø or 3Ø as well as 230-400v in 1Ø or 3Ø with neutral.

1 Year limited part and labor warranty standard.

Job

ELECTRIC DECK OVENS

∕∎

PIZZA	BAKE
 EP-2-2828 Single EP-4-2828 Double 	🗋 EE



EB-2-2828 Single EB-4-2828 Double

STANDARD FEATURES

- 2828 Models @ 9,500 watts in 208v, 220-240v, or 230-400v
- □ 200°-750° F (100°-400°C) thermostat
- □ Infinite Top & Bottom heat controls per deck
- □ Electric, 15 or 60-minute timer with continuous ring alarm and manual shut-off. Timers not provided on export models
- □ Interior oven lights
- □ 2 each 5 1/4" (133mm) Interior deck heights with Cordierite hearth decks
- □ All stainless steel exteriors
- Aluminized steel interiors
- □ Spring balanced, doors with windows
- Fully insulated
- □ 1 Year limited part and labor warranty

OPTIONS & ACCESSORIES


- □ Steel decks in lieu of Cordierite
- Solid Doors
- □ Set of 4" legs for countertop use
- □ Set of 30" legs, with or without casters
- Set of 16" legs, with or without casters for double stacked ovens

CERTIFICATIONS

(**ŲĻ)**us

CE



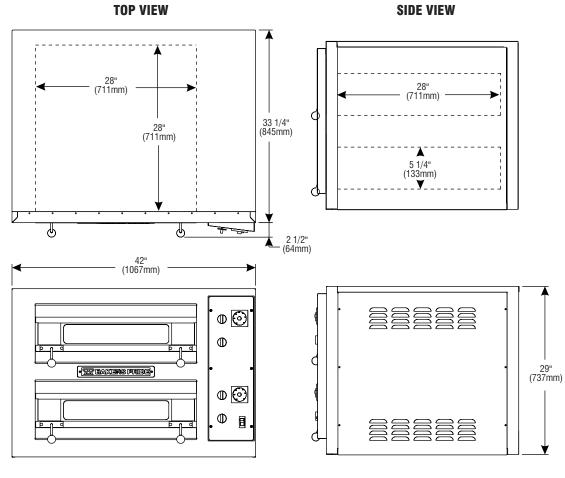

FRONT VIEW

SIDE VIEW

ALL DIMENSIONS NOMINAL

Shipping Weight				Carton Dimensions						Crate Size	
Model	Lbs.	Kilos	Wi Inches	dth 1 mm	De Inches	pth 1 mm	Hei Inches	ght mm	Cubic Feet	Cubic Meter	
EP-2828	600	273	43.5	1105	46	1168	37.5	952	43.5	1.23	

SPECIFICATIC		Deck Si	ze					Overall Din	nensions		
Model	Inches	mm	Heigl Inches		# Decks	Wi Inches	dth mm	Dep Inches	rth mm	Heig Inches	ht mm
EP-2-2828	28x28	711x711	5 1/4	133	2	42	1067	33 1/4	845	29	737
EP-4-2828	28x28	711x711	5 1/4	133	4	42	1067	33 1/4	845	58	1473
EB-2-2828	28x28	711x711	5 1/4	133	2	42	1067	33 1/4	845	29	737
EB-4-2828	28x28	711x711	5 1/4	133	4	42	1067	33 1/4	845	58	1473

* Height excludes legs

4" (102 mm) available for countertop application 16" legs (406mm) available for double stack ovens with or without casters 30" legs (762mm) available for single deck ovens with or without casters

POWER SUPPLY								
Model	WATTS	VOLTAGE	PHASE	AMPS L1 L2 L3 N				
All Models	9,500	208	3	19	19	19	_	
	9,500	220-240	3	15	15	15	-	
	9,500	208	1	24	24	-	-	
	9,500	220-240	1	21	21	-	-	
	9,500	230	1	40	-	-	-	
	9,500	230-400	3	14	16	15	-	

Each oven requires separate electrical connection Specify v 1Ø or 3Ø when ordering

	Non-Combustib	le Construction*	Combustible Construction**			
	Inches	mm	Inches	mm		
Left Side	1	25	1	25		
Right Side	1	25	1	25		
Rear	1	25	1	25		



Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification