



COS-101S

Combination-Oven/Steamer



COS-101S

Project _____

Item No. _____

Quantity _____

All data is shown per oven section, unless otherwise indicated.
Refer to operator manual specification chart for listed model name.

EXTERIOR CONSTRUCTION

- Stainless steel top, front and sides
- Stainless steel door, right hand hinge
- Tempered viewing window
- Door mounted condensate trough

INTERIOR CONSTRUCTION

- Fully welded stainless steel frame
- Fully insulated cooking chamber
- Fixed drain bottom center of cavity

OPERATION

- Tilt down control panel for service access
- Modular controls allow for field upgrade to digital controls
- Standard control with four function selection switch for steam, hot air, combined steam/hot air and cool down
- Solid state rotary dial thermostat - range 150-500°F (66-260°C)
- Synchronous motor driven 120 minute timer
- Automatic shut-down at elapsed time with audible buzzer which continues until manually shut off
- Door interlock switch shuts off oven when door is opened
- Open vented system
- Waste air quenching. Condenses steam and drains away by-products of the cooking process, eliminates flavor transfer
- Automatic steam regulation
- Self-contained, self-flushing steam generator separate from cooking compartment for instant steam recovery when switching modes
- External decalcifying access
- Cooling fan protects controls
- Maximum capacity - 18 steam table pans, 9 bake pans

STANDARD FEATURES

- Five (5) stainless steel wire shelves
- Pressure spray bottle
- Hose and spray assembly for interior cleaning
- Factory installed water pressure regulator and vented drain assembly
- Start-up inspection service by factory authorized service agent - operational testing and installation inspection
- One year parts and labor oven warranty*

* For all international markets, contact your local distributor.



OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

- **Legs**
 - 4" (101.6mm) adjustable legs
 - 6" (152.4mm) adjustable legs
 - 6" (152.4mm) seismic legs
 - 25" (635mm) adjustable legs
- Floor stand with pan storage
- Stand mount casters
- 480VAC, 3 phase
- Digital controls with cook and hold and Vario Steam®
- Side shield for control compartment protection, recommended when installed near another heat or water source
- Locking control panel
- Locking door hasp
- Tamper proof screws
- Additional stainless steel wire shelves
- Chicken roasting rack
- Core temperature probe with digital readout
- Left hinged door
- Stainless steel back panel
- Extended warranty


BLODGETT COMBI

www.blodgett.com


44 Lakeside Avenue, Burlington, VT 05401

Toll Free: (800) 331-5842 • Phone: (802) 860-3700 • Fax: (802) 864-0183

COS-101S

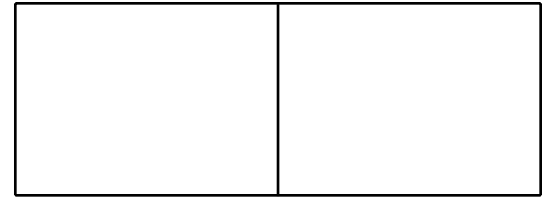

APPROVAL/STAMP

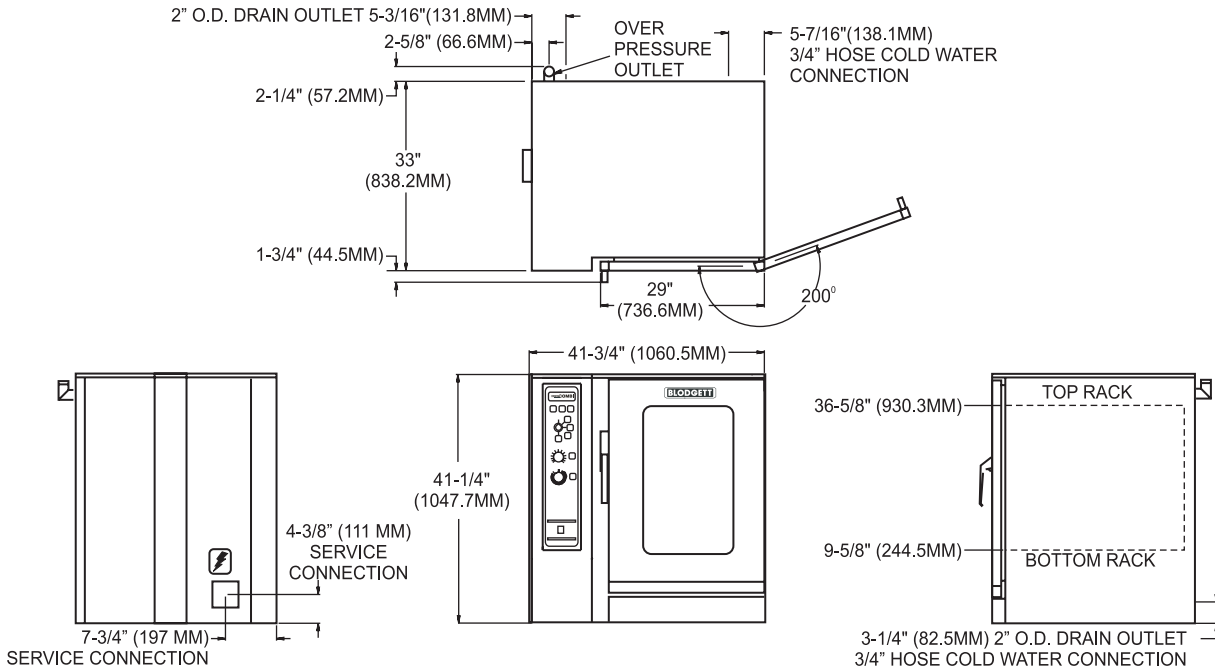

SHORT FORM SPECIFICATIONS

Provide Blodgett Combi standard model COS-101S combination-oven/steamer. Unit shall have the ability to cook with pressureless steam, hot air, or combination of steam and hot air. The interior of the unit(s) shall have the capability of being hosed down for cleaning. Unit shall have a rapid cool down mode. Unit shall be open vented for waste-air quenching. Steam generator shall be separate from the cooking compartment. Steam generator shall drain and flush automatically. Provide start-up inspection service by a factory authorized service agent.

DIMENSIONS:

- Floor Space:** 37" D x 41-3/4" W (939.8 x 1009.7mm)
- Unit Height:** 41-1/4" (1047.7mm)
- Additional Height:**
 - 4" adjustable legs 4-7/8" - 6" (123.8-152.4mm)
 - 6" adjustable legs 6-7/8" - 8" (174.6-203.2mm)
 - 6" adjustable seismic legs 6-5/8" - 8" (168.3-203.2mm)
 - 25" adjustable legs 25-1/4" - 26-3/8" (641.4-670mm)
 - Caster plate 8-5/8" (219mm)
 - Stand w/pan guides 22-1/2" - 23-5/8" (571.5-600.1mm)
 - Stand w/pan guides on casters 22-5/8" (574.7mm)

OVEN CLEARANCES:

- Right Side 1" (25.4mm)
- Rear 4" (101.6mm)
- Left Side 4" (101.6mm) with casters
12" (304.8mm) without casters

MINIMUM ENTRY CLEARANCE:

- Uncrated 37" (939.8mm)
- Crated 42" (1067mm)

SHIPPING INFORMATION:

- Approx. Weight:**
 - Single section 600 lbs. (273 kg)
 - Stand w/shelf 50 lbs. (23 kg)
 - Stand w/guides 119 lbs. (54 kg)
- Crate Sizes:** 55" (1397mm) x 42" (1067mm) x 44" (1118mm)

POWER SUPPLY:

- 208VAC 18.5KW 1 phase (89 amp) or 3 phase (52 amp)
- 240VAC 18.5KW 1 phase (77 amp) or 3 phase (45 amp)
- 480VAC 18.5 3 phase (23 amp)

This oven contains a mercury relay. DO NOT put mercury in trash. Relay must be recycled or disposed of as hazardous waste.

WATER SUPPLY:

Minimum Water Quality - not to exceed 30 parts per million of dissolved solids. PH should be 7.0 or higher.

Combi:

- 40(min)-50(max) PSI 3/4" hose cold water 2" drain connection
- Potable water only 122°F (50°C) avg. temperature

NOTE: The company reserves the right to make substitutions of components without prior notice

BLODGETT COMBI

www.blodgett.com

44 Lakeside Avenue, Burlington, VT 05401

Toll Free: (800) 331-5842 • Phone: (802) 860-3700 • Fax: (802) 864-0183