




B24-GG and B24-TT

24" Heavy Duty Sectional Range with Full Width Griddle

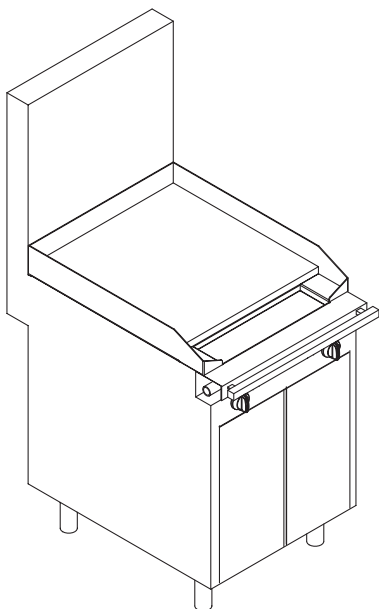

Model B24C-GG with 24" Flue Riser

OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

- Flue riser
 - ☐ 24"
 - ☐ 36"
- Single-shelf (mounts on 24" flue riser)
 - ☐ Solid shelf
 - ☐ Tuber shelf
- Double-shelf (mounts on 36" flue riser)
 - ☐ Solid shelves
 - ☐ Tuber shelves
- ☐ Stainless-steel back
- ☐ Deep range depth
- ☐ Bolt down flange feet
- ☐ Casters (in lieu of legs)
- ☐ Open frame base with casters
- ☐ Cable restraint kit for units on casters



Project _____

Item No. _____

Quantity _____

- ☐ Model B24C-GG (Standard Griddle with Cabinet Base)
- ☐ Model B24N-GG (Standard Griddle with Modular Range-Top)
- ☐ Model B24C-TT (Thermostatic Griddle with Cabinet Base)
- ☐ Model B24N-TT (Thermostatic Griddle with Modular Range-Top)

The Blodgett 24"-wide sectional-range with full width griddle is available with either a storage cabinet or with no base (for mounting as a modular range-top). Three flue-riser heights are available, and the flue riser can support up to 250 lbs for an optional shelf. An optional rearward-extending flue riser is available to increase the overall depth to match a deep battery. Battery-design assistance is available!

SPECIFY

- | | | |
|--|---|---|
| Gas Type | <input type="checkbox"/> Natural Gas | <input type="checkbox"/> Propane |
| Manifold | <input type="checkbox"/> Front (1-1/4") | <input type="checkbox"/> Rear (1") |
| Flue Riser Height | <input type="checkbox"/> 5" | <input type="checkbox"/> 24" (option) <input type="checkbox"/> 36" (option) |
| Range Depth | <input type="checkbox"/> Standard | <input type="checkbox"/> Deep (option) |
| Position in Battery | <input type="checkbox"/> Left End | <input type="checkbox"/> Right End <input type="checkbox"/> Not at End |
| Operating altitude (if above 2000 ft (700 meters) _____) | | |

Blodgett can often accommodate special or custom requirements. Contact your Blodgett representative.

STANDARD FEATURES (All models)

- Two 32,000 BTU 12" sections with separate controls
- 1" thick steel surface with side splashers
- Grease drawer holds 3/4 gallon
- 5" flue riser
- 7" stainless-steel front rail with "belly bar"
- Standard range depth
- Battery end-units have solid side (no manifold cover plate)
- Stainless-steel front and sides
- Fully insulated lining and burner boxes
- 6" adjustable legs (except on modular range-top model)
- Warranty: two year parts and labor from date of purchase

STANDARD FEATURES (Base Cabinets)

- Dual side by side stainless-steel doors

MODEL B24-GG AND B24-TT

BLODGETT


www.blodgett.com

1100 Old Honeycutt Road Fuquay-Varina, NC 27526 USA


Phone: (877) 255-3976 • Fax: (866) 644-1354




MODEL B24-GG AND B24-TT




TOP VIEW



SIDE VIEW of MODULAR MODEL

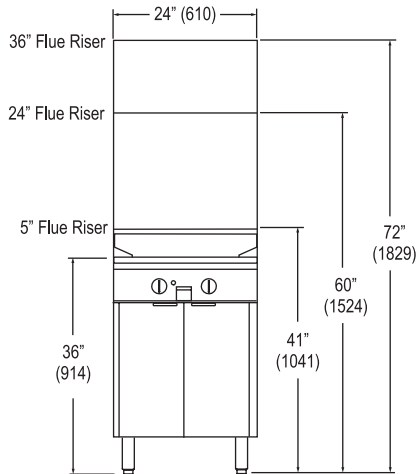

FRONT VIEW

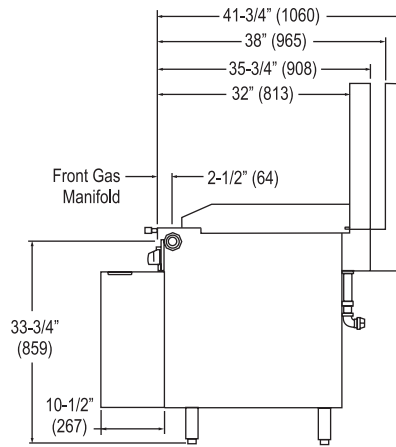


SIDE VIEW

SHIPPING CRATE DIMENSIONS & WEIGHT (Door entry clearance when uncrated is 24.5")					
Model	Width	Height	Depth	Volume	Weight
B24C-CC	44.0	43.0	45.5	49.8 cu ft	300 lbs
B24C-TT	(1118)	(1092)	(1156)	(1.41 cu m)	(136 kg)
B24N-CC	44.0	22.0	45.5	25.5 cu ft	300 lbs
B24N-TT	(1118)	(559)	(1156)	(0.72 cu m)	(136 kg)

Dimensions are in inches and (millimeters)

Flue riser for "deep" depth-option extends rearward 6"
(cooking surface area is same as for "standard" depth).

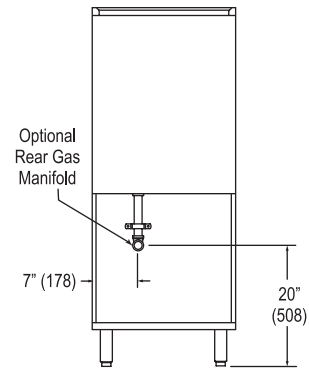

REAR VIEW

Minimum clearance from noncombustible construction is zero.
Minimum clearance from combustible construction is 10" on sides and 12" on rear.

SHORT FORM SPECIFICATIONS

The item shall be a 24"-wide front-manifold sectional range with full width (thermostatic) griddle with two 32,000 BTU sections, a 1" thick steel surface with side splashers, and a grease drawer with a capacity of 3/4 gallon. The item shall have a 7" front rail and a belly bar. The item shall have 6" adjustable legs [casters]. The item shall have a [5" 24" 36"] flue riser able to support 250 pounds. The exterior (except for the back) shall be constructed of 430 stainless steel #3 polish. If the item is at the end of a battery, the end side shall be solid (rather than have a coverplate over the end of the front manifold).

Model B24C-GG or B24C-TT: The item shall have a cabinet base with two side-by-side stainless steel doors.

UTILITY INFORMATION			GAS: Each unit has a 1-1/4" front gas manifold that couples to the adjacent sectional unit(s), and can be ordered with a 1" rear gas connection with a male NPT connector. Minimum supply pressure is 7" W.C. for natural gas, 11" W.C. for propane. An external pressure regulator and shut off valve must be provided. If using a flexible-hose gas connection, the I.D. of the hose must not be smaller than the connector on the unit and must comply with ANSI Z21.69. Provide an adequate means of restraint to prevent undue strain on the gas connection. FLUE EXHAUST: Installation under a vented hood is recommended.
MODEL	GAS (BTU/hr)		
	Natural Gas	Propane	
B24N-GG	64,000	56,000	
B24C-GG	64,000	56,000	
B24N-TT	64,000	56,000	
B24C-TT	64,000	56,000	

OTHER TECHNICAL INFORMATION

Exterior surfaces are 430 stainless steel #3 polish, except the back is aluminized steel.

Each 12" section has a separate control knob located on the front panel.

Check local codes for fire and sanitary regulations.

NOTE: The company reserves the right to make substitutions of components without prior notice

BLODGETT

www.blodgett.com

1100 Old Honeycutt Road Fuquay-Varina, NC 27526 USA

Phone: (877) 255-3976 • Fax: (866) 644-1354