# **BUNN**<sup>°</sup>

ITEM#

PROJECT

# **3 Gallon Low Profile Iced Tea Brewer**

DATE



Model TB3Q-LP with **TDO-3.5 Dispenser** 

(dispenser sold separately) Dimensions: 28.75" H x 11.57" W x 21.87"D (73cm H x 29.38cm W x 55.55cm D)

### Features

#### Iced Tea Brewer

- Brews 16.3 to 26.7 gallons (61.7 to 101.1 litres) per hour from real tea leaves.
- · Brews directly into TDO-3.5 gallon dispenser (sold separately) with brew-through lid.
- · Sleek, compact, low-profile styling to accommodate a variety of spaces.
- Quickbrew (Q) models available for shorter brewing cycles.
- SplashGard<sup>®</sup> funnel deflects hot liquids away from the hand.
- TB3-LP has adjustable stop time for more control over flavor extraction.
- International models available.

For current specification sheets and other information, go to www.bunn.com.

## **Related Products**

Easy Clear® EQHP-TEA Product No. : 39000.0007

Easy Clear® EQHP-TEACRTG Product No.: 39000.1007



#### TDO-3.5 – Tea Dispenser

Product No. : 37100.0000 Capacity: 3.5 gallons Weight: 10 lbs. (4.5 kg) 10" H x 10.7" W x 13.7" D (25.4cm H x 27.18cm W x 34.8cm D)




Translucent Pouchpack Tea Funnel Quick dispense, TB-3Q

Product No. : 35282.0001 Standard dispense, TB-3 Product No. : 35282.0002



Single/Dual Filter Pack Product No. : 20100.0000 Packed per case: 500 Dimensions:  $5\frac{1}{4}$ " Base x  $3\frac{3}{4}$ " Sidewall 13.34 cm Base x 9.52 cm Sidewall







#### Model Agency Listing TB3Q-LP UL LISTED (NSE) TB3-LP UL LISTED NSE

9/10 B1a


<b>Dimensions &amp;</b>	Specifications
-------------------------	----------------

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cubic Measure	Shipping Weight	Cord Attached
TB3Q-LP	36700.0104	120	14.8	1680	1780	26.7 gal./hr.	4.15 ft <sup>3</sup>	43 lbs.	Yes*
TB3-LP	36700.0106	120	14.8	1680	1780	16.3 gal./hr.	4.15 ft <sup>3</sup>	43 lbs.	Yes*

\*Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Electrical: Models require 2-wires plus ground service rated at 120V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with  $\frac{1}{4}$ " OD male flare fitting. Requires minimum 1GPM water flow.

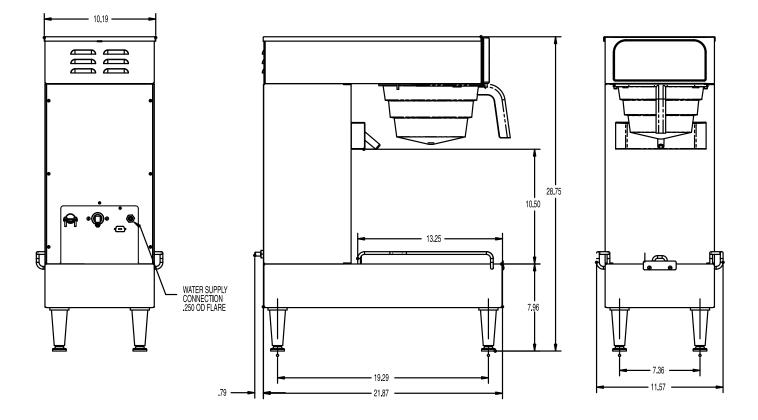

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. All dimensions shown in inches.