BUNN° INTERNATIONAL

My Café[®] Automatic Commercial Grade Pod Brewer

ITEM#	
PROJECT	



MCA(cup not included)
Dimensions: 13.6" H x 8" W x 10.5" D
(34.5cm H x 20.3cm W x 26.7cm D)

Features

My Café Automatic Pod Brewer

- Patented pod drawer works with most pods from 45 to 61 mm. A commercial-quality system capable of brewing both coffee and tea.
- Fast brew coffee in about 30 seconds. Stainless steel heating tank uses a thermostat to hold water at the perfect ready-to-brew temperature.
- Patented sprayhead allows extraction of all coffee flavoring materials and aromatics.
- Tea button features pulse brew technology to provide steeping action.
- Brew four to 12 ounces (118-355 mL) of coffee or tea to preferred strength by adjusting the portion/volume control.
- Easy to use and maintain with a removable water reservoir and easy-slide lid to pour in water.
- A drawer-style pod holder keeps hands clean and dry at all times.
- Reservoir holds 46 oz. (1.4 litres) of water.
- Pod holder, reservoir/lid and drip tray assembly are dishwasher safe.
- Includes two pod holders to prevent flavor transfer.
- Automatic model is connected to waterline, eliminating the need to manually refill reservoir.
- Energy-saver mode reduces tank temperature during idle periods.

For current specification sheets and other information, go to www.bunn.com.

Simple steps to perfect coffee, tea, and other hot beverages.

Step 1 After filling the reservoir, push the button at the top of the brewer and open the pod holder drawer.



Step 2 Insert pod in pod holder and push drawer to lock in place.





- Eliminate waste by brewing one cup at a time on demand.
- Dishwasher safe pod holder. Load and unload with one hand.
- No loose grounds to measure and no pot to clean.
- Hot water dispense for hot beverages like cappuccino, cocoa and soups.

Press coffee button to infuse pod with pressurized water for optimum extraction. OR

Step 3

Press tea button for a Pulse-Brew™ to create a steeping action.



Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
MCAA	35400.0016	230	6	1300	1330	60, 8 oz. cups/hr.	11.35 lbs.	Yes	(E
						60, 237mL cups/hr.	(5.1 kg)	UK Plug	
MCAA	35400.0017	230	6	1300	1330	60, 8 oz. cups/hr.	11.35 lbs.	Yes	(E
						60, 237mL cups/hr.	(5.1 kg)	Europe Plug	
MCAA	35400.0019	220-230	6	1300	1330	60, 8 oz. cups/hr.	11.35 lbs.	Yes	®
						60, 237mL cups/hr.	(5.1 kg)	Korea Plug	

Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Electrical: 230 volt models require 2-wires plus ground service rated 220-240V, single phase, 50/60Hz.

220 volt model requires 2-wires plus ground service rated 220-240V, single phase, 50/60Hz.

Plumbing: Machine supplied with strainer that has a 1/4" male flare fitting.

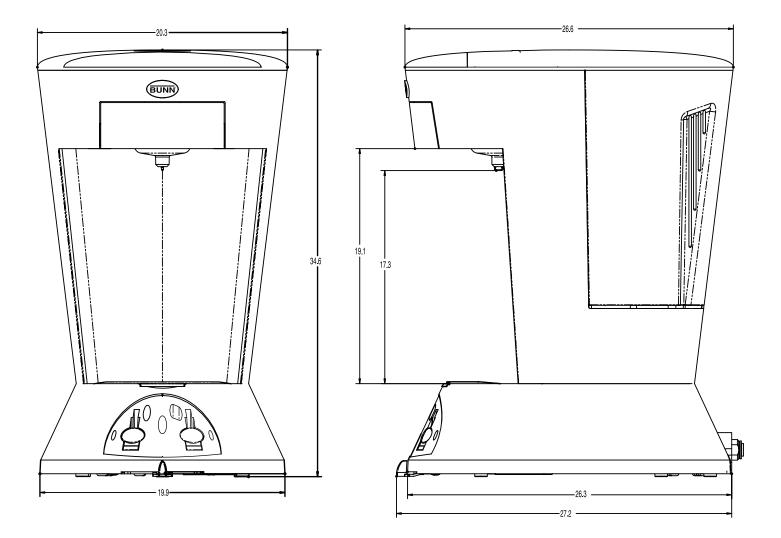

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com