

Single Soft Heat® Brewer with Docking System

ITEM#

PROJECT

DATE



Single SH with SH Server

(server sold separately)

Dimensions: 35.8" H x 9.3" W x 20.0" D
(90.9cm H x 23.6cm W x 50.8cm D)

Features

Coffee brewers with portable servers

- Variable batch selector allows you to brew ½, 1, or 1½ gallon (1.9, 3.8, 5.7 litres) batches.
- Patented server heat control automatically shuts off once target temperature is reached. Can be set to 175°-190°F (79.4°-87.8°C).
- Electronic grinder interface communicates to grinder on exact amount of coffee for selected brew batch size.
- Holds one 5.7 litre SH server (sold separately).
- Safety-Fresh® patented brew-through lid with vapor seal and spill prevention.
- Remote 1 or 2 server docking stations for additional satellite coffee serving. (sold separately)
- Brew capacity varies by model. See back for details.

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004

Easy Clear® EQHP-10L
Product No. : 39000.0001



Single/Dual Filter Pack
Product No. : 20138.0000



**SH Server with
1SH Stand**



One Position Drip Tray
For use with Single/Single SH/1SH Stand
Product No. : 26830.0000



Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity	Shipping Weight	Cord Attached	Agency
Single SH	27800.0006	230	13.7	3031	3150	8.7 gal./hr. (32.9 L/hr.)	59 lbs. (26.8 kg)	No	CE
Single SH	27800.0014	230	13.7	3031	3100	8.7 gal./hr. (32.9 L/hr.)	59 lbs. (26.8 kg)	No	CE
Single SH	27800.0021	220	12.7	3031	2800	8.7 gal./hr. (32.9 L/hr.)	59 lbs. (26.8 kg)	No	CE


Note: Soft Heat Brewers and Servers are sold, boxed and shipped separately.

Brewing capacity: based upon incoming water temp of 60°F/15.5°C (140°F/60°C rise).

Electrical: 230 volt models require 2-wires plus ground service rated 220-240V, single phase, 50/60Hz.

220 volt models require 2-wires plus ground service rated 220-240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" male fitting.

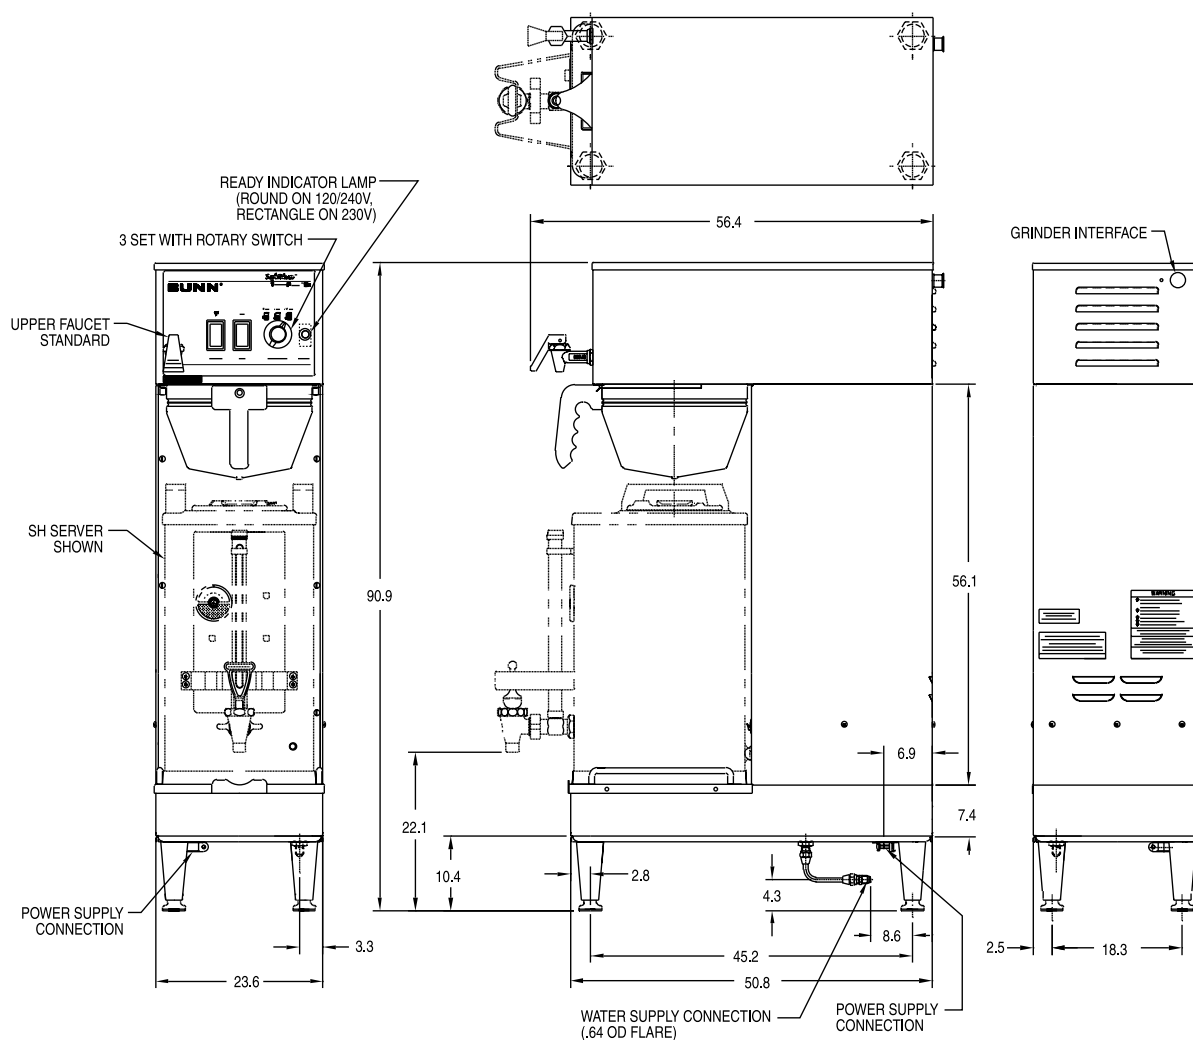

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.