

BrewWISE® Dual Soft Heat® DBC Brewer

ITEM#

PROJECT

DATE



Dual SH DBC with SH Servers

(servers sold separately)

Dimensions: 35.8" H x 18" W x 21.2" D
(90.9cm H x 45.7cm W x 53.8cm D)

Features

BrewWISE® Brewing System

- Brews ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 litre) batches.
- Stores individual coffee and flavor profiles using adjustable water volume, bypass percentage, pulse brew, and pre-infusion timing.
- Operate any combination of BrewWISE equipment error-free with wireless brewer-grinder interface via Smart Funnel®.
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present.
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools.
- Simplify installation and calibration by creating your own recipe cards and dedicated funnels with the BrewWISE Recipe Writer using your PC (U.S. and English Windows® compatible).
- Brewers use patented SH servers with heat control (auto shut off once target temperature is reached).
- Brew capacity varies by model. See back for details.

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products

Easy Clear® EQHP-25L
Product No. : 39000.0002



Easy Clear® EQHP-25
Product No. : 39000.0005

Single/Dual Filter Pack
Product No. : 20138.0000



BrewWISE® Recipe Writer (BRW)
Product No. : 34444.0001



Recipe Card
Product No.: 34447.0000

- Program a recipe to be used on brewer or grinder.



Ad Card
Product No.: 34448.0000

- Program a message to appear on the brewer's display.



Two Position Drip Tray
Product No.: 27150.0000



SH Server
Product No. : 27850.0001



2SH Stand
Product No. : 27875.0001
(230 volt)



MHGA
Product No.: 35600.0001
(230 volt)



G9-2TA DBC
Product No.: 33700.0005
(230 volt)



Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity	Shipping Weight	Cord Attached	Agency
Dual SH DBC†	33500.0008	230	26.6	2@3300	6123	18.9 gal/hr (71.5 L/hr)	90 lbs. (40.8 kg)	No	CE V PC
Dual SH DBC	33500.0014	200	28	2@2650	5600	18.9 gal/hr (71.5 L/hr)	90 lbs. (40.8 kg)	No	
Dual SH DBC†	33500.0021	220	25.5	2@3300	5600	18.9 gal/hr (71.5 L/hr)	90 lbs. (40.8 kg)	No	CE

† With funnel locks. Note: Soft Heat® Brewers and Servers are sold, boxed and shipped separately.


Brewing capacity: based upon incoming water temp of 60°F/15.5°C (140°F/60°C rise).

Electrical: 230 volt model requires 2-wires plus ground service rated 220-240V, single phase, 50/60Hz.

220 volt model requires 2-wires plus ground service rated 220-240V, single phase, 60Hz.

200 volt model requires 2-wires plus ground service, single phase, 50Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" male fitting. Tank capacity: 8.4 gallons (31.8 L)

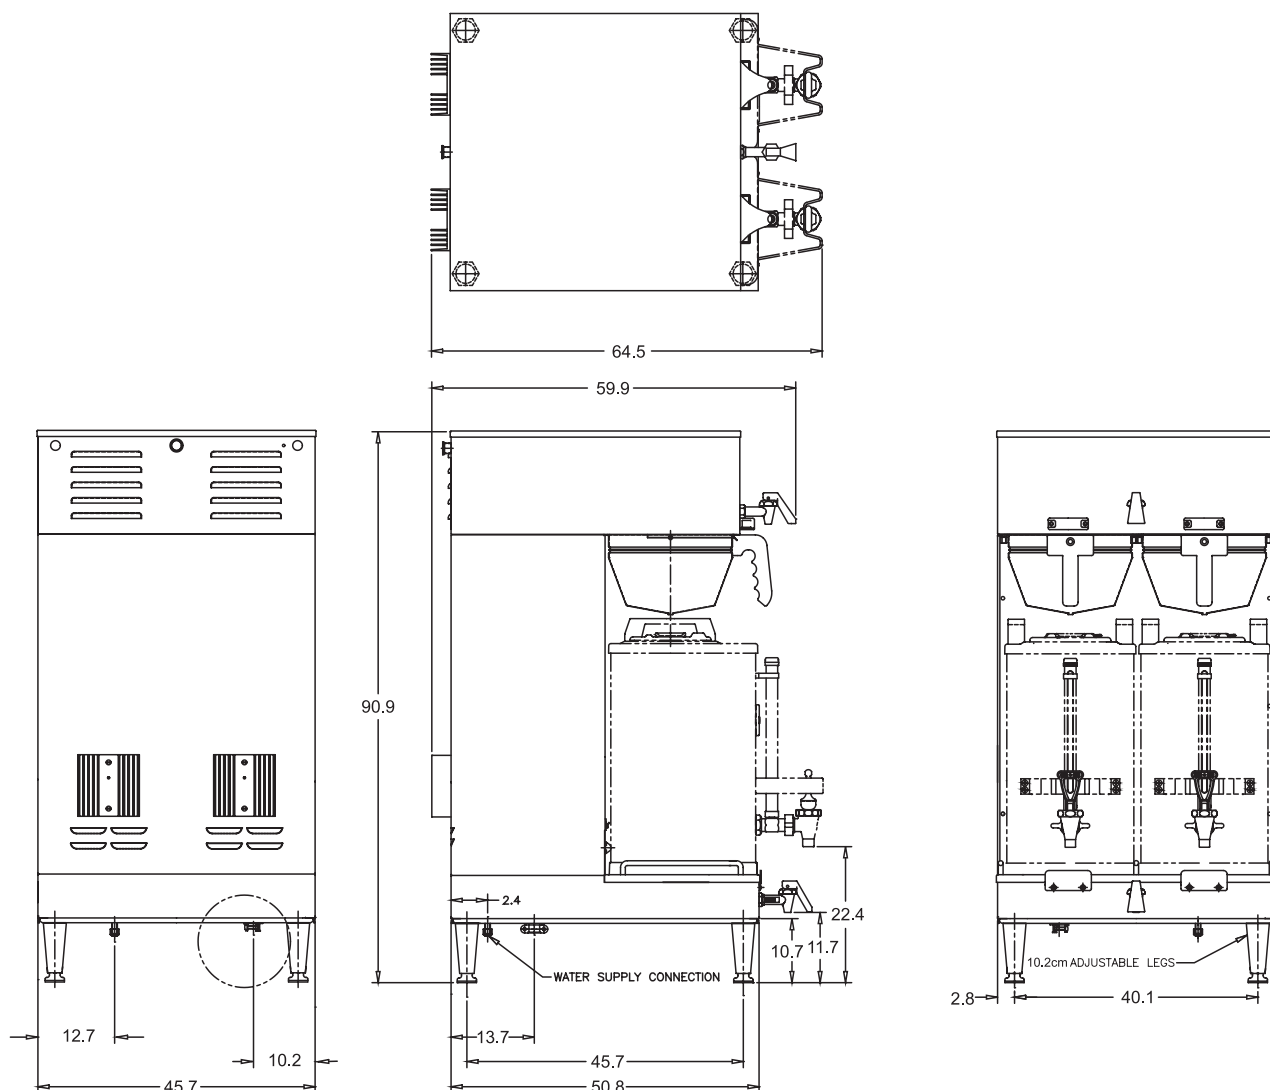

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

9/08 © Bunn-O-Matic Corporation