

CDBCF Coffee Brewer with 3 Warmers

ITEM#

PROJECT

DATE



CDBCF

(2 top warmers)

(decanter sold separately)

Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)

Features

Automatic CDBCF Coffee Brewers

- Large 200 oz. (5.9 litre) tank provides back-to-back brewing capacity.
- Adjusts automatically to varying water pressure.
- Pot level, cold brew lock-out and tank temperature set easily from advanced touch pad on front of machine.
- Electronic diagnostics and built in tank drain make service easier.
- Ensures coffee brew quality with cold brew lock out capability.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with pre-infusion or pulse brew and digital temperature control.
- Automatic warmer shut-off.
- Brew capacity varies by model. See back for details.



CDBCF

(3 lower warmers)

(decanter sold separately)

Dimensions: 17" H x 16.5" W x 17.7" D
(43.2cm H x 41.9cm W x 45cm D)

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000



Easy Clear® ED-17-TL

Product No. : 30201.1001

Easy Clear® EQHP-10

Product No. : 39000.0004

Easy Clear® EQHP-10L

Product No. : 39000.0001



Paper Filter Pack

Product No. : 20115.0000

Packed per case: 1,000



Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
CDBC FDB (1L/2U)	28800.0301	200	19.3	3500	3861	6.8 gal./hr. (25.7 L/hr.)	31 lbs. (13.6 kg)	No	
CDBC FDB (1L/2U)	28800.0302	100	15.1	1850	1514	5.2 gal./hr. (19.6 L/hr.)	31 lbs. (13.6 kg)	Yes	
CDBCFA (3 lower)	28800.0125	230	8.8	3300	2030	6.8 gal./hr. (25.7 L/hr.)	32 lbs. (14.6 kg)	No	CE
Power cord	27728.0001								

Brewing capacity: based upon incoming water temp of 60°F/15°C (140°F/60°C rise) per 1/2 gallon (1.89 litre). Brew time of 4 minutes.

Electrical: 230 volt model requires 2-wires plus ground service rated 220-240V, single phase, 50/60 Hz.

100/200 volt 50 Hz models require 2-wires with ground, single phase.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

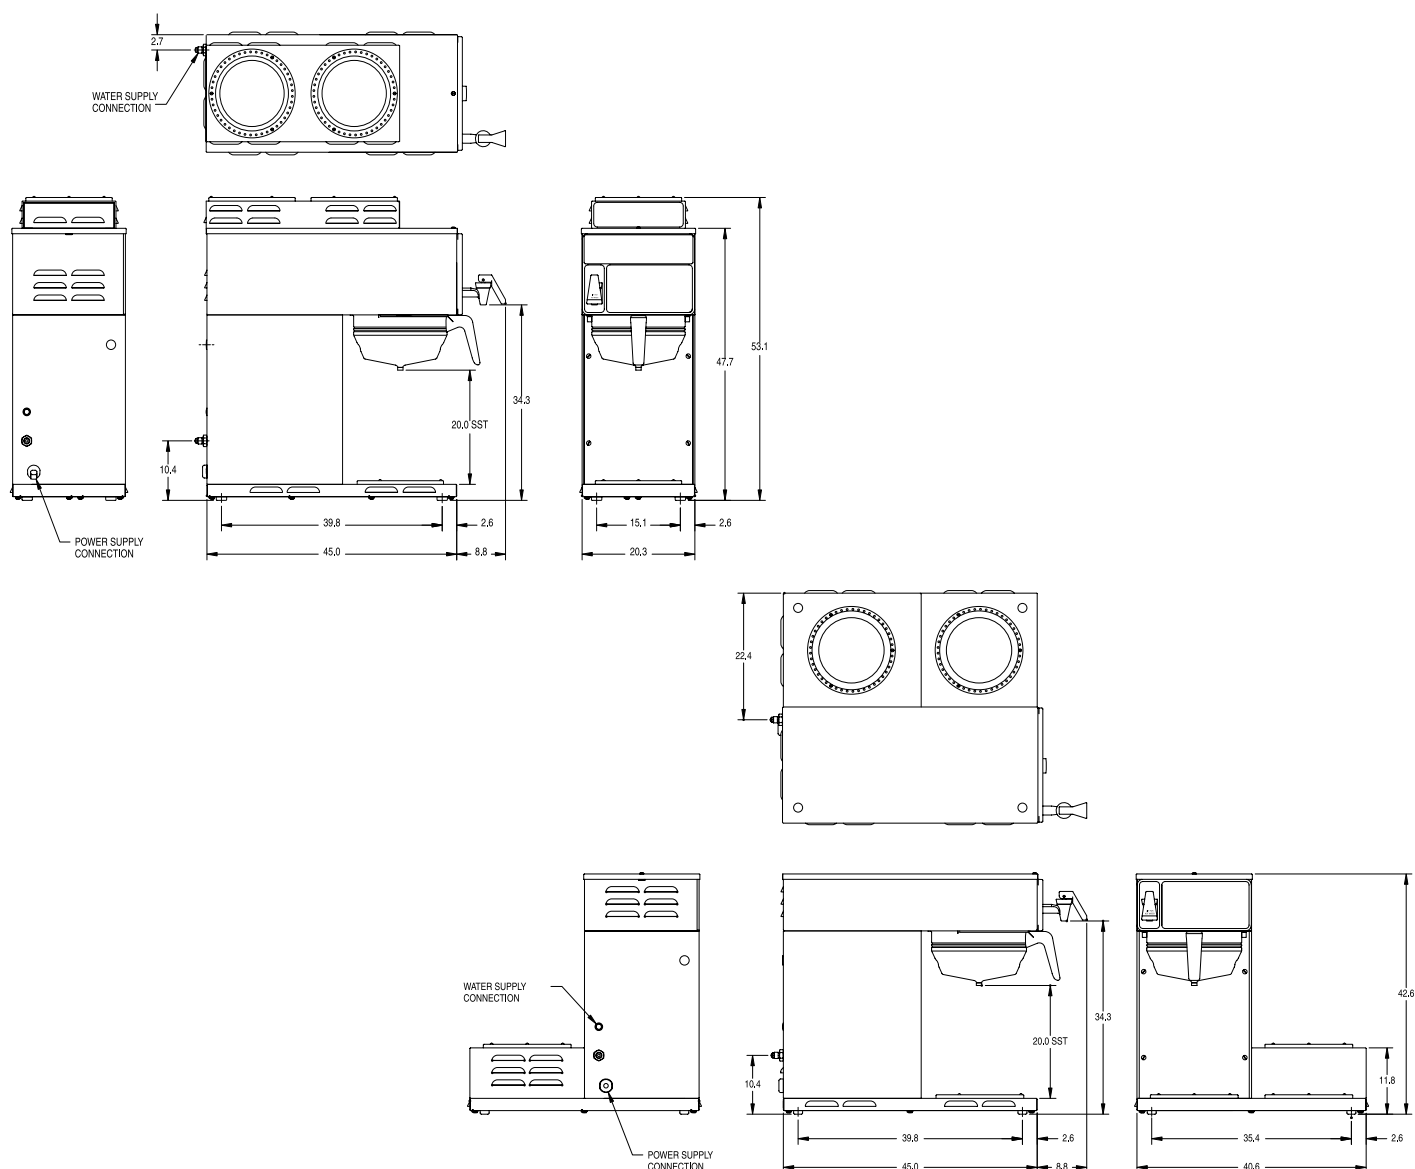

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters. Bunn-O-Matic Corporation owns all copyrights relating to materials in this publication. Please contact BUNN to request permission to reproduce any portion of this publication.