

Single Multi-BrewWISE®



Multi-BrewWISE

(servers sold separately)

Dimensions: 27.4" H x 9.29" W x 20.7" D
(69.6cm H x 23.6cm W x 52.6 cm D)

Features

Single Multi-BrewWISE® Brewing System

- Serve several beverages (hot coffee, iced coffee, hot tea, iced tea and hot water) from one model.
- Full or half batch hot coffee option.
- Coffee extraction controlled with pre-infusion or pulse brew, digital temperature control and variable dilution for iced coffee/tea.
- Operates error-free with Multi-BrewWISE grinder. (sold separately)
- Uses wireless brewer-grinder interface through Smart Funnel® with SplashGuard®.
- Digital front control panel with digital temperature display. Metric volume and Celsius temperature settings.
- Separate warmer controls with auto shut off.
- Master on/off switch.
- Equipped with tank drain and funnel locks.
- Unit supplied with 2 Smart Funnels for coffee and tea.
- Brew capacity varies by model. See back for details.

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004



Easy Clear® EQHP-10L
Product No. : 39000.0001

G9-2T DBC MB



Easy Pour® black decanter



Single/Dual Filter Pack
Product No. : 20138.0000
Packed per case: 500



1GPR-SS (Hot Coffee)
Product No.: 12487.0003

1GPR-SS IC (Iced Coffee)
Product No.: 12487.0010

1GPR-SS IT (Iced Tea)
Product No.: 12487.0011



Easy Pour® orange decanter



Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
Single Multi-BrewWISE	37200.0001	230	15.4	3214	3550	10 gal/hr (37.85 l/hr)	60 lbs. (27.2 kg)	No	CE
Single Multi-BrewWISE	37200.0000	200	18	3214	3600	10 gal/hr (37.85 l/hr)	60 lbs. (27.2 kg)	No	

Brewing capacity: based upon incoming water temp of 60°F (15.5°C) (140°F (60°C) rise).

Electrical: 230 volt model requires 2-wires plus ground service rated 220-240, single phase, 50/60 Hz.

200 volt model requires 2 wires plus ground, singles phase, 50 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male fitting.

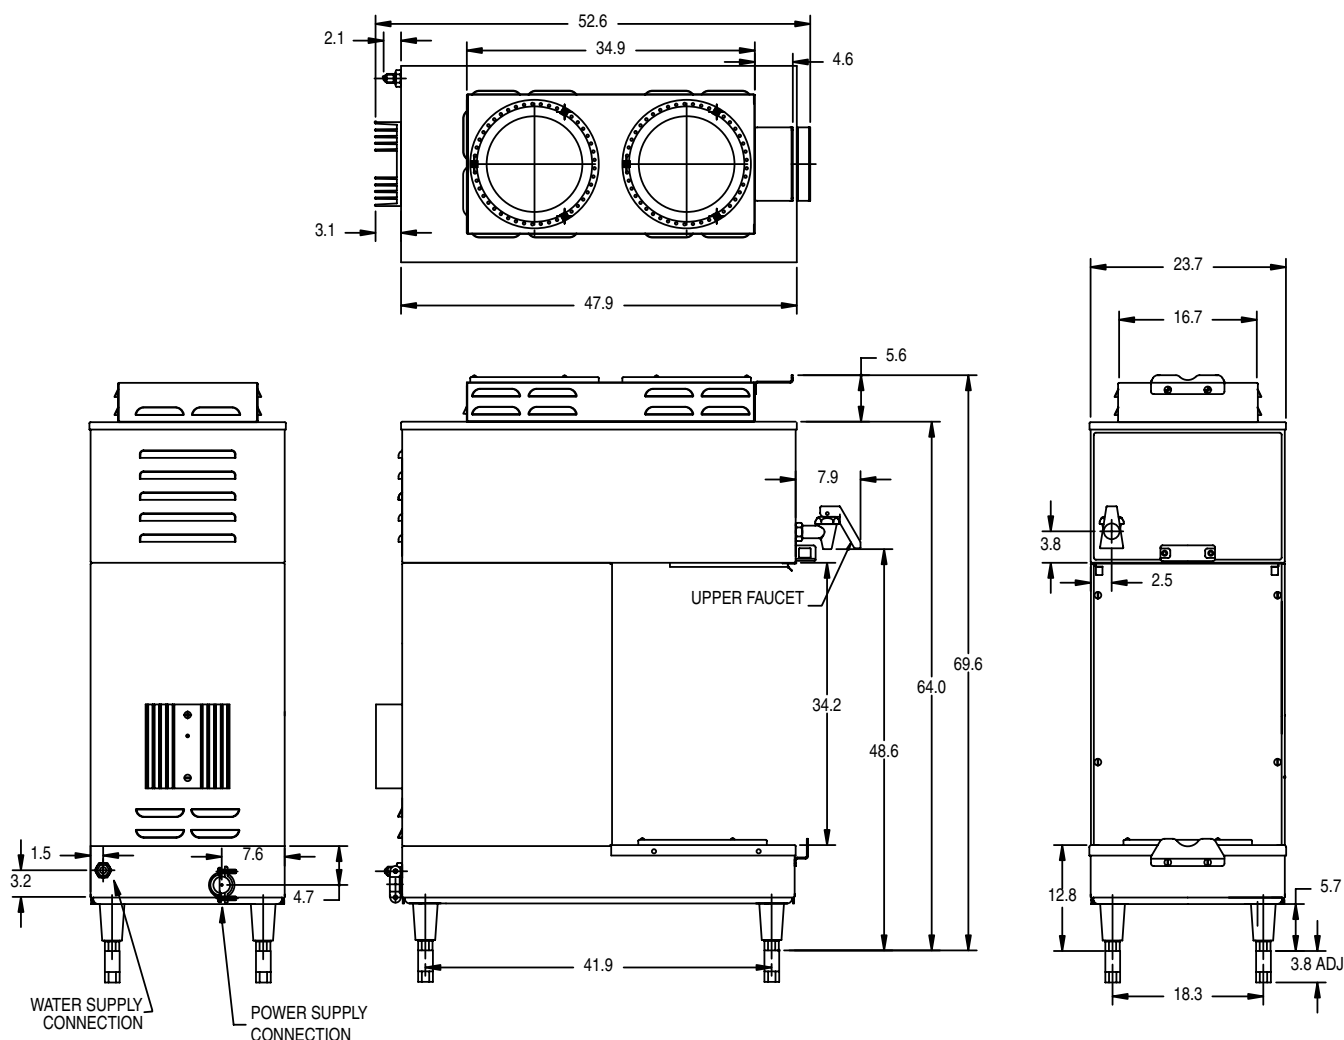

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.