

Silver Series® 2-Flavour Cold Beverage System



JDF-2S

(available with juice or liquid coffee display)

Dimensions: 33.1"H x 10"W x 25.5"D

(84.1 cm H x 24.9 cm W x 64.8 cm D)

(Refillable containers sold separately)

Features

Cold Beverage System

Cold beverage dispenser with High Intensity® mixing delivers superior drinks consistently glass after glass

- A cost effective solution to providing your customers with superior performance in juice and other concentrated beverage dispensing.
- One dispenser delivers both frozen or ambient products increasing profits by lowering costs.
- Drink consistency assured with the BUNN High Intensity® mixing technology.
- Pumps and mixes 2+1 to 11+1 concentrated beverages, including 4+1 high viscosity and 5+1 juices accurately and consistently.
- Quick dispense with 1.0 to 1.5 ounces (29.6 to 44.4 ml) per second flow rate.
- 7" (17.8cm) cup clearance accommodates most containers.
- 10 lb. (4.5 kg) ice bank assures cold product.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Modular dispense deck makes service fast and simple.
- Both push-button and portion control in the same machine.
- Available with Juice or Iced Coffee display.
- Preventive maintenance kit: 39690.0000.



For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-10

Product No. :39000.0004

Easy Clear® EQHP-10CRTG

Product No. :39000.1004

Easy Clear® EQHP-10L

Product No. :39000.0001

Easy Clear® EQHP-10LCRTG

Product No. :39000.1001



Ambient Conversion Kit

Product No.: 33699.0000

Refillable Container

Product No.: 39302.0000



Dimensions & Specifications

Model	Product #	Volts	Amps	Capacity	Shipping Weight	Cord Attached	Agency
JDF-2SA	37900.0003	230	3.8	4 (5 oz.) drinks/min 4 (148 mL) drinks/min	103 lbs. 46.7 kg	Yes	CE
JDF-2SA	37900.0007	230	3.8	4 (5 oz.) drinks/min 4 (148 mL) drinks/min	103 lbs. 46.7 kg	Yes	CE


Capacity: 1 Gallon (3.8 L)

75°F (24°C) incoming water for 180 drinks without exceeding 40°F (4.4°C) finished drink temperature.

Electrical: Model requires 2-wire grounded service rated 220-240V, single phase, 50/60 Hz.

Plumbing: 20-100 psi (138 - 690 kPa). Machine supplied with $\frac{3}{8}$ " male fitting.

Refrigeration: R-134a refrigerant, 10 oz. (.28 kg), 10 lb. (4.5 kg) ice bank system

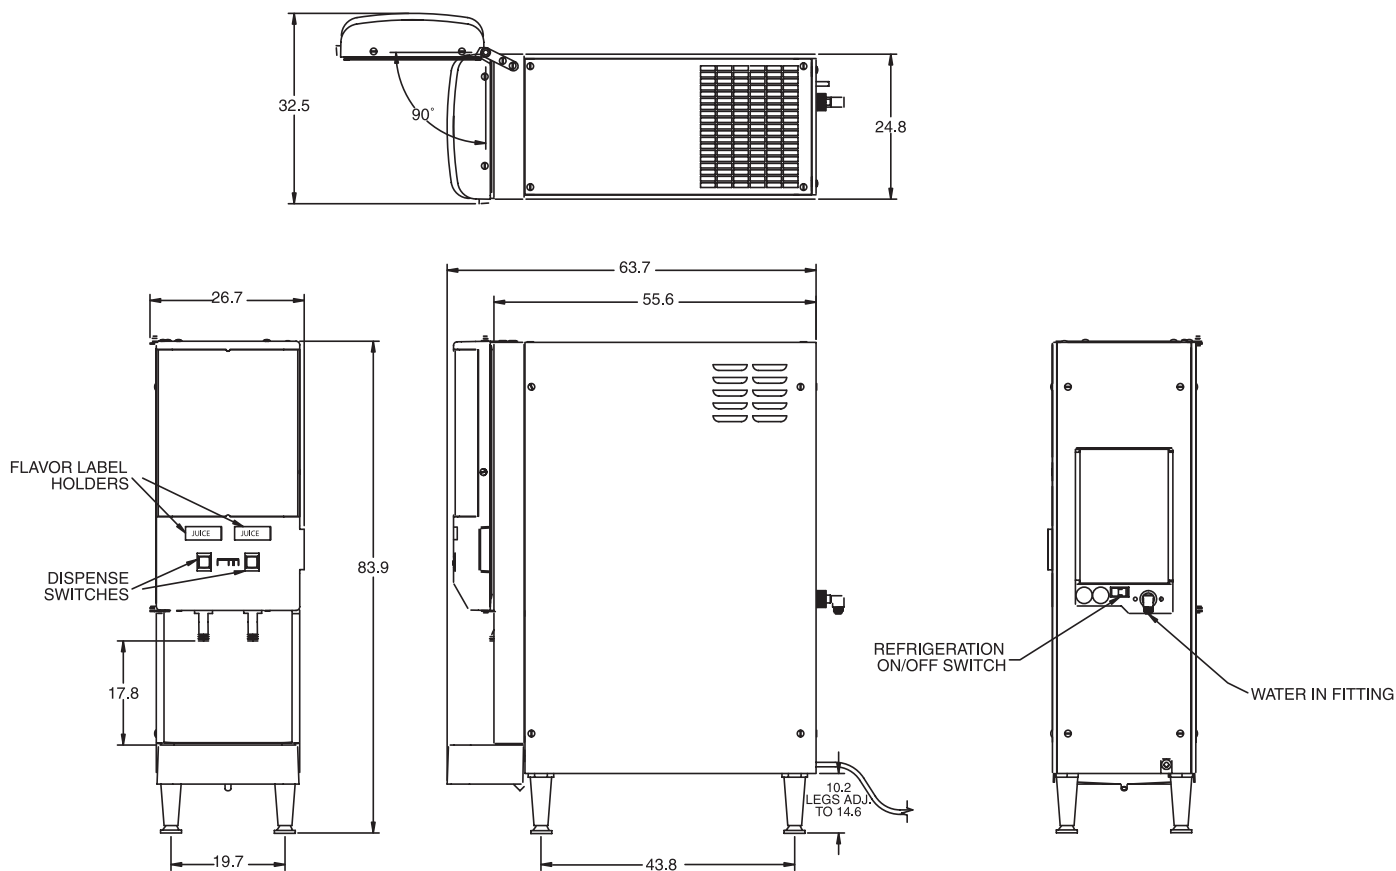

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

7/10 © Bunn-O-Matic Corporation