BUNN° INTERNATIONAL

III LIVIII		

Hot Water Dispenser

PROJEC	l		
DATE			



Features

18.9 Litre (5 Gallon) Hot Water Dispenser

- Dispenses up to 21 gallons (79 litres) of boiling water (H5X) per hour for food prep and cleaning.
- Precise temperature 72°–212°F (22.2°C-100°C) ensures consistent, high
 quality results when preparing large amounts of mashed potatoes, gravy,
 cheese sauce, gelatin, oatmeal and many more foods.
- Locate hot water at preparation site to increase speed, safety and efficiency of kitchen staff.
- Can be mounted for space savings.

H5E/H5X

Dimensions: 28.5"H x 7.1"W x 17.5"D (72.4cm H x 18.03cm W x 44.5cm D)

For current specification sheets and other information, go to www.bunn.com.


*International models may vary in appearance.

Related Products

Easy Clear® EQHP-10 Product No. : 39000.0004

Easy Clear® EQHP-10L Product No.: 39000.0001





1. Wall Mount Bracket (side) Product No.: 12542.0000

2. Wall Mount Bracket (front) Product No.: 13125.0001

3. Container Holding Shelf Product No. : 12599.0000

4. Drip Tray

Product No.: 02497.0000


Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Temp Settings	Gal./Hr. cold water input 35°F (1.6°C)	Gal./Hr. hot water input 140°F (60°C)	Shipping Weight	Cord Attached	Agency
H5MA	12500.0056	230	16	3670	3700	200°F	9.1 gal	25 gal.	32 lbs.	No	C€
						93.3°C	(39.4 L)	(94.6 L)	(14.5 kg)		
H5EA	12500.0062	230	16	3670	3700	204°F	8.9 gal.	23.5 gal.	32 lbs.	No	C€
						95.5°C	(33.7 L)	(89 L)	(14.5 kg)		
H5EA	12500.0063	230	16	3670	3700	85°/105°F	varies with a	application	32 lbs.	No	C€
					2	29.4°C/40.6°	C		(14.5 kg)		
H5XA	12500.0064	230	16	3670	3700	212°F	8.5	20.9 gal.	32 lbs.	No	C€
						100°C	(32.2 L)	(79.1 L)	(14.5 kg)		
H5EA	12500.0067	230	17.4	3675	4000	90°F	varies with a	application	32 lbs.	No	C€
						32.2°C		•	(14.5 kg)		

Electrical: All models require 2-wires plus ground service rated 220-240V, single-phase, 50/60 Hz.

Note: Supplied strain relief on rear side of machine.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" OD male flare fitting.

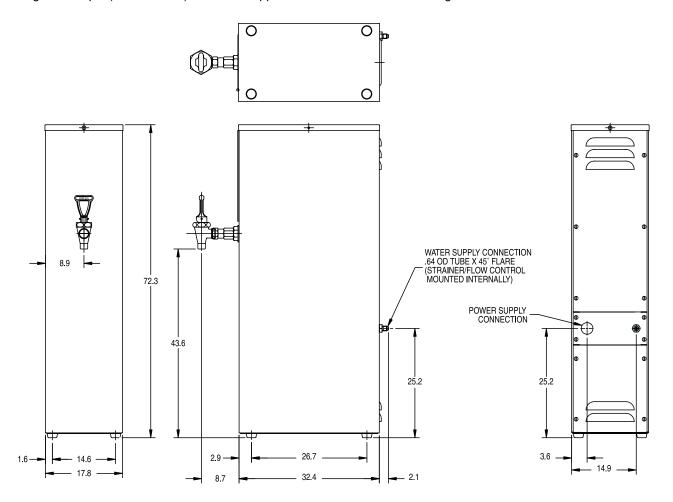

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com